

十速

**TM56M1522/22B/22C**

**/22L/21H**

***DATA SHEET***

***Rev 1.04***

**tenx** reserves the right to change or discontinue the manual and online documentation to this product herein to improve reliability, function or design without further notice. **tenx** does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. **tenx** products are not designed, intended, or authorized for use in life support appliances, devices, or systems. If Buyer purchases or uses **tenx** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **tenx** and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, cost, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use even if such claim alleges that **tenx** was negligent regarding the design or manufacture of the part.

---

## AMENDMENT HISTORY

Version	Date	Description
0.80	Jan, 2023	<ol style="list-style-type: none"> <li>1. Update the figure of ADC conversion</li> <li>2. Update the conversion time of ADC as 42us at Fadc=1MHz</li> <li>3. Modify the explanation in the example asm code of DECXSZ and INCXSZ</li> <li>4. Insert colon after the label in the example asm code of "INSTRUCTION SET"</li> <li>5. Add comment for the conversion time in the ADC electrical characteristics</li> <li>6. ICP mode needs PA7 in PIN DESCRIPTIONS at p.11</li> </ol>
0.81	Jan, 2023	<ol style="list-style-type: none"> <li>1. Update Min. Operating Voltage for Fsys=20MHz(FXT)</li> <li>2. Modify Pin Assignment Diagram</li> <li>3. Modify TM56M1522/21H Block Diagram</li> <li>4. Modify the specification of LDOC</li> <li>5. Update the graph of minimal operating voltage</li> <li>6. Modify the description for PWMCKS=FIRC*2</li> </ol>
0.82	Feb, 2023	<ol style="list-style-type: none"> <li>1. Add "LDOC voltage vs VCC" into Characteristics Graphs</li> <li>2. Delete 1<sup>st</sup> page</li> <li>3. Update the specification of LDOC</li> </ol>
0.83	Feb, 2023	<ol style="list-style-type: none"> <li>1. Delete the item in AMENDMENT HISTORY from version 0.1 to version 0.79</li> <li>2. PA7 has no high-sink capability in the description of Feature, I/O Port, HSINK and DC characteristics</li> <li>3. Add QFN-16 and DFN-10 into Pin Summary</li> <li>4. Update typical value of Ioh, Iol, Rpu</li> </ol>
0.84	Feb, 2023	<ol style="list-style-type: none"> <li>1. Update the graph of minimal operating voltage</li> <li>2. Update Icc in DC characteristics</li> </ol>
0.85	Feb, 2023	<ol style="list-style-type: none"> <li>1. Add pin change wake-up into features</li> <li>2. Add a section of Pin Change Wake Up</li> <li>3. Add "Trimmed VBG1.2V/2V/2.5V" into features</li> <li>4. Add description for the usage of BG2P5TRIM and BG2TRIM</li> </ol>
0.90	Feb, 2023	<ol style="list-style-type: none"> <li>1. Update Icc in DC characteristics</li> <li>2. Update LVD Hysteresis Window in DC characteristics</li> <li>3. Update LVR Hysteresis Window in DC characteristics</li> <li>4. Add LDOC Current vs. Voltage</li> <li>5. Delete TBD and relative modification in FEATURES</li> <li>6. Add TM56M1521H</li> </ol>
0.91	Feb, 2023	<ol style="list-style-type: none"> <li>1. Add comparison table between TM56F1552/22 and TM56M1522</li> <li>2. change CIN3 and CPI4 as reserved</li> <li>3. Add "Don't use ADVREFS=11 for the selection of DAC's VREF"</li> <li>4. delete BG2P5TRIM</li> <li>5. Add PORSEL, ADVREFS=11, LDOCOUT, IRCFT, BG2TRIM and RDCTL can't be emulated</li> <li>7. 18Eh.3 must be set as 1 in emulation</li> <li>8. PA7 has no high-sink, 1/2 bias and pull-down</li> <li>9. Change 96~1536ms as 84~1344ms for WDT</li> <li>10. Change 12~96ms as 10.5~84ms for WKT</li> </ol>
0.92	Feb, 2023	<ol style="list-style-type: none"> <li>1. Add ROM endurance in the description of PROM(p.14)</li> <li>2. Modified typical Ioh@3V as 5.3mA</li> <li>3. Modified WDT Time out=192ms as 168ms in the example code of p.42</li> <li>4. Modified WKT period=48ms as 42ms in the example code of p.42</li> <li>5. Modified typical "RESET Input Low width" from 30us to 11us</li> <li>6. Modified typical "CPU start up time" as 21ms</li> <li>7. Modified maximal FIRC frequency @ -40℃~105℃ Vcc=3~5V as +2%</li> <li>8. Modify LDOC's description: 1.2V LDO regulator @Max 70mA in the section of features in p.8</li> <li>9. Modify LDOC's description: 1.2V LDO regulator @Max 70mA output in the section of pin descriptions in p.12</li> <li>10. Modify LDOC's description: 1.2V LDO regulator in the section of dc characteristics in p.91</li> <li>11. Enlarge the graphs of "LDOC Current vs. Voltage"</li> <li>12. Remove heating coil for 2V ADC Vref in the section of features in p.8</li> </ol>
0.93	Mar, 2023	<ol style="list-style-type: none"> <li>1. Add the condition of RDCTL=8ns into the graph of minimal operating voltage</li> <li>2. "SCIN=010: reserved" and "SCIP=011: reserved" in memory map(p.75)</li> </ol>
0.94	Mar, 2023	<ol style="list-style-type: none"> <li>1. reduce the hierarchy of table of content</li> <li>2. change "RDCTL=3 or 11" as RDCTL=8ns(p.5, p.8, p.74)</li> <li>3. Change "LVRE=0x02=2.3V" as "LVRE=2.3V" in the graph of min operating voltage</li> </ol>
0.95	Mar, 2023	<ol style="list-style-type: none"> <li>1. Modify the description of operating voltage in features</li> <li>2. Modify "V<sub>HYS_CMP</sub>" in comparator characteristics</li> </ol>

0.96	Mar, 2023	<ul style="list-style-type: none"> <li>1. TABRH and relative description/example: TABR register is also loaded with high byte of ROM[DPTR].</li> <li>2. TABRL and relative description/example: TABR register is also loaded with low byte of ROM[DPTR].</li> <li>3. TABR write 01h : Read PROM low byte data to W and TABR</li> <li>4. TABR write 02h : Read PROM high byte data to W and TABR</li> <li>5. Add more description for TABR</li> </ul>
0.97	Mar, 2023	<ul style="list-style-type: none"> <li>1. typo: negedge and posedge trigger =&gt; falling edge and rising edge trigger</li> <li>2. typo: falling edge to trigger =&gt; falling edge trigger</li> <li>3. typo: rising edge to trigger =&gt; rising edge trigger</li> <li>4. typo: CFG02 =&gt; BG2TRIM, delete CFG0B</li> <li>5. typo: PCH_S(10Ch) =&gt; PCH_S(Write 0x1C to PCH)</li> <li>6. Add description for PCH_S into the table of PCH: After reset, the PCH_S is cleared</li> <li>7. typo: 85 KHz SIRC =&gt; 95 KHz(@ Vcc=5V) SIRC</li> <li>8. typo: a 16 MHz System clock rate requires V<sub>CC</sub> &gt; 1.9V =&gt; a 16 MHz System clock rate requires V<sub>CC</sub> &gt; 2V@(25°C)</li> <li>9. typo: Chip =&gt; chip</li> <li>10. typo: PA7 has no 1/2 bias and pull-down =&gt; PA7 has no 1/2 bias and pull-down capability</li> <li>11. typo: STOP mode can be woken up only by External pin interrupt =&gt; STOP mode can be woken up only by external pin interrupt and pin-change.</li> <li>12. typo: TM0 interrupt interval cycle time =&gt; TM0 interrupt frequency</li> <li>13. typo: 85 KHz =&gt; 95 KHz; 42.5 KHz =&gt; 47.5 KHz; 2.656 KHz =&gt; 2.969 KHz</li> <li>14. typo: Write TM0 =&gt; Write TM0(TM0WR); TM0 =&gt; timer0; TM0 =&gt; Timer0(TM0)</li> </ul>
0.98	Sep, 2023	<ul style="list-style-type: none"> <li>1. Update the block diagram of ADC</li> <li>2. Modify the minimal value of LDOC</li> <li>3. Update LVD and LVR(Add TM56M1522B/22C)</li> </ul>
0.99	Sep, 2023	<ul style="list-style-type: none"> <li>1. typo: Modify POR as 1.8V in the table of "FAMILY OVERVIEW"</li> <li>2. Delete "2V ADC Vref" from the chapter of FEATURES(Redundant)</li> <li>3. Modify the description of I/O ports as "All I/O with High-Sink except PA7" in the chapter of FEATURES</li> <li>4. Add the POR Voltage Electrical Characteristics</li> <li>5. Add VPP into the table of "PIN DESCRIPTIONS"</li> <li>6. Rename PA7 as PA7(VPP) in "PIN DESCRIPTIONS"</li> </ul>
1.00	Oct, 2023	<ul style="list-style-type: none"> <li>1. typo: correct the reset value of bit 5 as "x" in the table of PINMOD(105h)</li> <li>2. change TM1 to Timer1(TM1)</li> <li>3. typo: change "19h.3~0" as "19h.4~0"</li> <li>4. Modify the timing diagram of ADC</li> <li>5. Modify Max. value of Total Accuracy and Integral Non-Linearity of ADC Electrical Characteristics</li> </ul>
1.01	Oct, 2023	<ul style="list-style-type: none"> <li>1. Modified programming pin as 7-wire for normal mode</li> </ul>
1.02	Jan, 2024	<ul style="list-style-type: none"> <li>1. Fix typo in the table of PIN SUMMARY: TM52M -&gt; TM56M</li> <li>2. Add the table of OPTION and OPTION2 into the chapter of Interrupt</li> <li>3. Modify the description about OPTION in the table of MEMORY MAP</li> <li>4. Add more explanation at relative context: PA7 has no high-sink, 1/2 bias and resistor pull-down capability.</li> <li>5. Add note for unbonded pads</li> </ul>
1.03	Jan, 2024	<ul style="list-style-type: none"> <li>1. Fix typo of IORWX as "(W) OR (f)"</li> <li>2. Add note for suggested RDCTL below the graph of minimal operating voltage</li> <li>3. Add the table of RDCTL into the section of Program ROM (PROM)</li> <li>4. Change the suggested value of RDCTL to bold font.</li> </ul>
1.04	Mar, 2024	<ul style="list-style-type: none"> <li>1. Add ADC reference voltage for ADVREFS=11b into the table of ADC Electrical Characteristics</li> <li>2. Change the pin assignment of TM56M1522B</li> <li>3. Add the pin assignment diagram of TM56M1522L</li> <li>4. Add the pin assignment diagram of SOP14 for TM56M1522</li> <li>5. Update PACKAGING INFORMATION</li> <li>6. Update PIN SUMMARY</li> <li>7. Update the LVR/LVD value of TM56M1522B/22L</li> <li>8. Add TM56M1522B/22C/22L/21H into "FAMILY OVERVIEW"</li> <li>9. Fix typo: default value of SYSCFG is 0000_0010_0000_0000(TM56M1522/21H)/0000_0100_0000_0000(TM56M1522B/22C/22L)</li> <li>10. Replace "CMOS Output" with "CMOS Output (except PWMx)" in I/O Pin Function Table 1~4</li> <li>11. Add TM56M1522L into relative location</li> </ul>

## CONTENTS

<b>AMENDMENT HISTORY .....</b>	<b>2</b>
<b>CONTENTS.....</b>	<b>4</b>
<b>FAMILY OVERVIEW .....</b>	<b>6</b>
<b>FEATURES .....</b>	<b>7</b>
<b>SYSTEM BLOCK DIAGRAM.....</b>	<b>10</b>
<b>PIN ASSIGNMENT DIAGRAM .....</b>	<b>11</b>
<b>PIN DESCRIPTIONS .....</b>	<b>13</b>
<b>PIN SUMMARY.....</b>	<b>14</b>
<b>FUNCTION DESCRIPTION.....</b>	<b>15</b>
1 CPU Core.....	15
1.1 Program ROM (PROM) .....	15
1.2 System Configuration Register (SYSCFG).....	16
1.3 RAM Addressing Mode .....	17
1.4 Programming Counter (PC) and Stack .....	20
2 Reset .....	25
2.1 Power on Reset (POR) .....	25
2.2 Low Voltage Reset (LVR) .....	25
2.3 External Pin Reset (XRST) .....	26
2.4 Watchdog Timer Reset (WDTR) .....	26
3 Clock Circuitry and Operation Mode .....	27
3.1 System Clock.....	27
3.2 Dual System Clock Modes Transition .....	29
3.3 System Clock Oscillator.....	32
4 Interrupt .....	33
5 I/O Port .....	37
5.1 PA0-PA7, PB0-PB2, PB4-PB6 .....	37
5.2 Pin Change Wake Up .....	41
6 Peripheral Functional Block .....	42
6.1 Watchdog (WDT) /Wakeup (WKT) Timer .....	42
6.2 Timer0 .....	45
6.3 Timer1 .....	50
6.4 T2:15-bit Timer .....	53
6.5 PWM: 16 bits PWM.....	55
6.6 Analog-to-Digital Converter .....	62
6.7 Comparator .....	65
6.8 Cyclic Redundancy Check (CRC).....	68
<b>MEMORY MAP.....</b>	<b>69</b>
<b>INSTRUCTION SET .....</b>	<b>78</b>
<b>ELECTRICAL CHARACTERISTICS .....</b>	<b>92</b>

1. Absolute Maximum Ratings .....	92
2. DC Characteristics .....	92
3. Clock Timing .....	93
4. Reset Timing Characteristics .....	93
5. LVR Circuit Characteristics .....	94
6. LVD Circuit Characteristics .....	95
7. ADC Electrical Characteristics .....	96
8. Comparator Characteristics .....	96
9. Characteristics Graphs .....	97
<b>PACKAGING INFORMATION .....</b>	<b>101</b>

## FAMILY OVERVIEW

	TM56F1552 (TK) TM56F1522 (IO)	TM56M1522/22B/22C/22L/21H
EV board	On chip debug	TM56F1552 (TK) TM56F1522 (IO)
RAM	336	256
EEPROM	128	X
CTK	V	X
SIRC	84 KHz@5V/25°C	95.6 KHz@5V/25°C
WDT	96ms, 192ms, 768ms, 1536ms @5V	84ms, 168ms, 672ms, 1344 ms @5V
WKT	12ms, 24ms, 48ms, 96ms @5V	10.5ms, 21ms, 42ms, 84ms @5V
SFR.RDCTL	X	V (suggest RDCTL=8ns)
OPA	V	X
SFR.OPOF (CMPP to OPO)	OPOF=0 (POR, CMPP <= OPO) OPOF=1 (CMPP <= CIPx )	No OPA, must set OPOF =1 ( CMPP connect to CIPx) in emulation. CIN3 and CIP4 reserved
SFR.ADVREFS	VCC / 2.48V	VCC / 2 / 2.48V ADVREFS=2V, could not be emulated
SFR.BG2TRIM	X	Read BG2TRIM and Write into BGTRIM, obtain ADVREFS=2.0V
SFR.SVRF (DAC VREF)	VCC / 1.2 / 2.48V	VCC / 1.2 / 2.48V
SFR.IRCFT	X	Fine-tuning 32-level freq each IRCF step, IRCFT could not be emulated
PAD.LDOC	X	LDOC, could not be emulated
PA7 High Sink	75mA@5V	48mA@5V <b>No 1/2 bias</b> <b>No resistor pull-down</b>
IO	PA7~0 PB7~0 PD1~0	PA7~0 PB6~4, PB2~0
POR	1.95V No PORSEL	1.8V Has PORSEL
Minimal Operating Voltage	1.9V @16MHz	2.3V @16MHz
LVR <sub>th</sub>	2.05V~4.15V	2.05V~4.15V(TM56M1522/21H) 1.8V~3.9V(TM56M1522B/22C/22L)
LVD <sub>th</sub>	2.2V~4.15V	2.2V~4.15V(TM56M1522/21H) 1.93V~3.87V(TM56M1522B/22C/22L)

## FEATURES

1. **ROM: 4K x 16 bits MTP(TM56M1522/22B/22C/22L), 2K x 16 bits MTP(TM56M1521H)**
2. **RAM: 256 x 8 bits**
3. **STACK: 8 Levels**
4. **System Clock type selections:**
  - Fast clock from 1~20 MHz Crystal (FXT)
  - Fast clock from Internal RC (FIRC, 16 MHz)
  - Slow clock from 32768 Hz Crystal (SXT)
  - Slow clock from Internal RC (SIRC, 95 KHz@V<sub>CC</sub>=5V)
5. **System Clock Prescaler:**
  - System Clock can be divided by 1/2/4/8 option
6. **Power Saving Operation Mode**
  - FAST Mode: Slow-clock is enabled, Fast-clock keeps CPU running
  - SLOW Mode: Fast-clock can be disabled or enabled, Slow-clock keeps CPU running
  - IDLE Mode: Fast-clock and CPU stop. Slow-clock, T2, or Wake-up Timer keep running
  - STOP Mode: All clocks stop, T2 and Wake-up Timer stop
7. **3 Independent Timers**
  - Timer0
    - 8-bit timer divided by 1~256 pre-scale option / auto-reload / counter / interrupt / stop function
  - Timer1
    - 8-bit timer divided by 1~256 pre-scale option / auto-reload / interrupt / stop function
    - Overflow and Toggle out
  - T2
    - 15-bit timer with 4 interrupt interval time options
    - IDLE mode wake-up timer or used as one simple 15-bit time base
    - Clock source: Slow-clock, Fsys/128, or FIRC/512 (16 MHz/512)
8. **Interrupt**
  - Three External Interrupt pins
    - 1 pin is falling edge wake-up triggered & Interrupts
    - 2 pins are rising or falling edge wake-up triggered & Interrupt
  - Timer0 / Timer1 / T2 / Wake-up Timer Interrupt
  - ADC Interrupt
  - Comparator Interrupt
  - PWM Interrupt
  - LVD Interrupt

**9. Wake-up Timer (WKT)**

- Clocked by built-in RC oscillator with 4 adjustable interrupt times
  - 10.5 ms / 21 ms / 42 ms / 84 ms @  $V_{CC}=5V$

**10. Watchdog Timer (WDT)**

- Clocked by built-in RC oscillator with 4 adjustable reset times
  - 84 ms / 168 ms / 672 ms / 1344 ms @  $V_{CC}=5V$
- Watchdog timer can be disabled / enabled in STOP mode

**11. Six 16 bits PWMs**

- Six individual duty-adjustable, shared period-adjustable
- PWM clock source: System clock ( $F_{sys}$ ), FIRC (16 MHz), FIRC\*2 (32 MHz)
- PWM0 supports complementary output (PWM0P, PWM0N)
- PWM0 output with non-overlap time durations adjustable:  $(0\sim15)*(PWMCLK)$
- PWM0N/0P/1/2/3/5 has two outputs(PWM4 merely one)

**12. 12-bit ADC with 13 channels for External Pin Input and 2 channels for Internal Voltage**

- Two internal voltage channels: VBG,  $1/4V_{CC}$
- ADC reference voltage:  $V_{CC}$ ,  $V_{BG}$  (2.48V) and  $V_{BG}$  (2V)

**13. Comparator**

- Comparator x 1
  - With 7-bit DAC input
  - DAC reference voltage:  $V_{CC}$  or  $V_{BG}$  (1.20V or 2.48V)

**14. Reset Sources**

- Power On Reset
- Watchdog Timer Reset
- Low Voltage Reset
- External Pin Reset

**15. Low Voltage Reset (LVR) and Low Voltage Detection (LVD)**

- 16-Level Low Voltage Reset:
  - 2.05V~4.15V(TM56M1522/21H)/1.8V~3.9V(TM56M1522B/22C/22L), can be disabled
- 15-Level Low Voltage Detection:
  - 2.20V~4.15V(TM56M1522/21H)/1.93V~3.87V(TM56M1522B/22C/22L), can be disabled

**16. Operating Voltage**

- $F_{sys}=16\text{ MHz}$ , LVR~5.5V. Suggest LVR  $\geq 2.30V$
- $F_{sys}=8\text{ MHz}$ , PWMCKS=FIRC\*1, LVR~5.5V. Suggest LVR  $\geq 2.05V$ (TM56M1522/21H)  
 $F_{sys}=8\text{ MHz}$ , PWMCKS=FIRC\*1, LVR~5.5V. Suggest LVR  $\geq 1.8V$ (TM56M1522B/22C/22L)  
Note: Refer to the “Electrical Characteristics Graphs”.

**17. Operating Temperature Range : -40°C to + 105°C**



**18. Table Read Instruction: 16-bit ROM data lookup table****19. Integrated 16-bit Cyclic Redundancy Check (CRC) function****20. Instruction set: 39 Instructions****21. I/O ports:**

- Maximum 14 programmable I/O pins
  - Open-Drain Output
  - CMOS Push-Pull Output
  - Schmitt Trigger Input with pull-up / pull-down resistor option(PA7 has no pull-down resistor)
  - All I/O with High-Sink except PA7
  - $1/2 V_{CC}$  ( $1/2$  bias) Output (except PA7)
- All pin change wake up (falling edge and rising edge trigger)

**22. LDOC**

- 1.2V LDO regulator @Max 70mA output to PA3

**23. IRCFT**

- FIRC frequency 5-bit fine-tuning per trimming step for frequency tracking

**24. Programming connectivity support 5-wire (ICP) or 7-wire program****25. RDCTL: Read signal delay control for Program ROM**

- The user must switch this register to “8ns” to enhance the performance of minimal operating voltage.

**26. Trimmed VBG1.2V/2V**

- The users could move BG2TRIM to BGTRIM for exact 2V VBG.


**27. Package Types:**

- 16-pin SOP (150 mil)
- 10-pin MSOP (118 mil)
- 8-pin SOP (150 mil)
- 16-pin QFN (3\*3\*0.75 - 0.5mm)
- 10-pin DFN (3\*3\*0.75 - 0.5mm)

**28. Supported EV board**

- TM56F1552/22


## SYSTEM BLOCK DIAGRAM


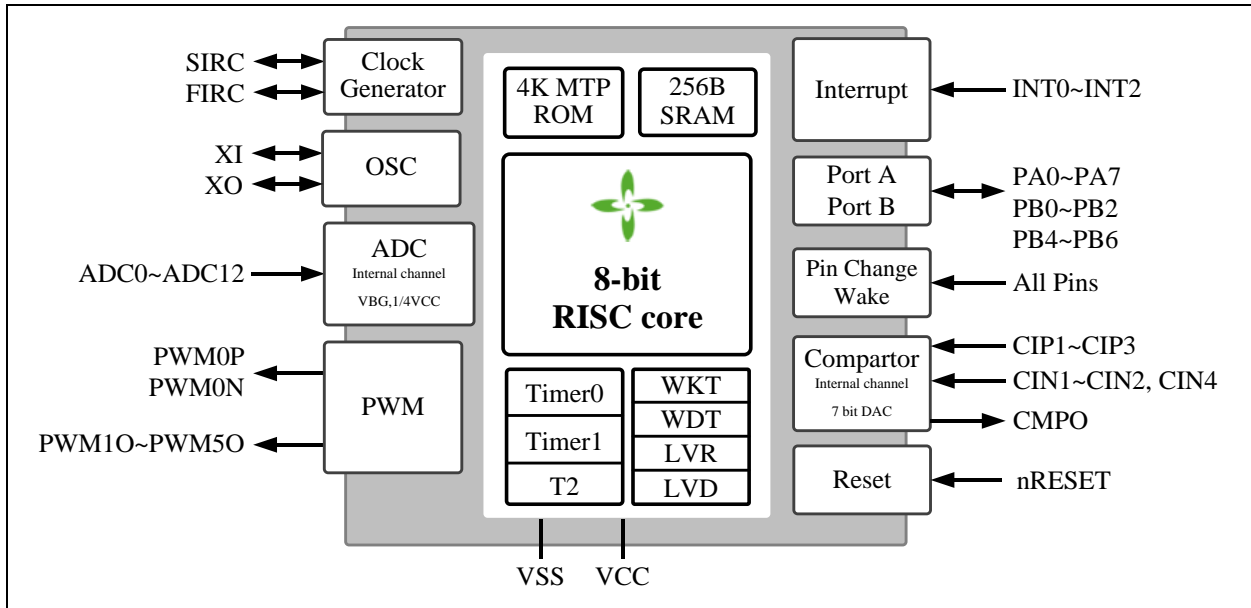


TM56M1522/22B/22C/22L/21H Block Diagram

## PIN ASSIGNMENT DIAGRAM

Software initialization is necessary for the pads that are not bonded.

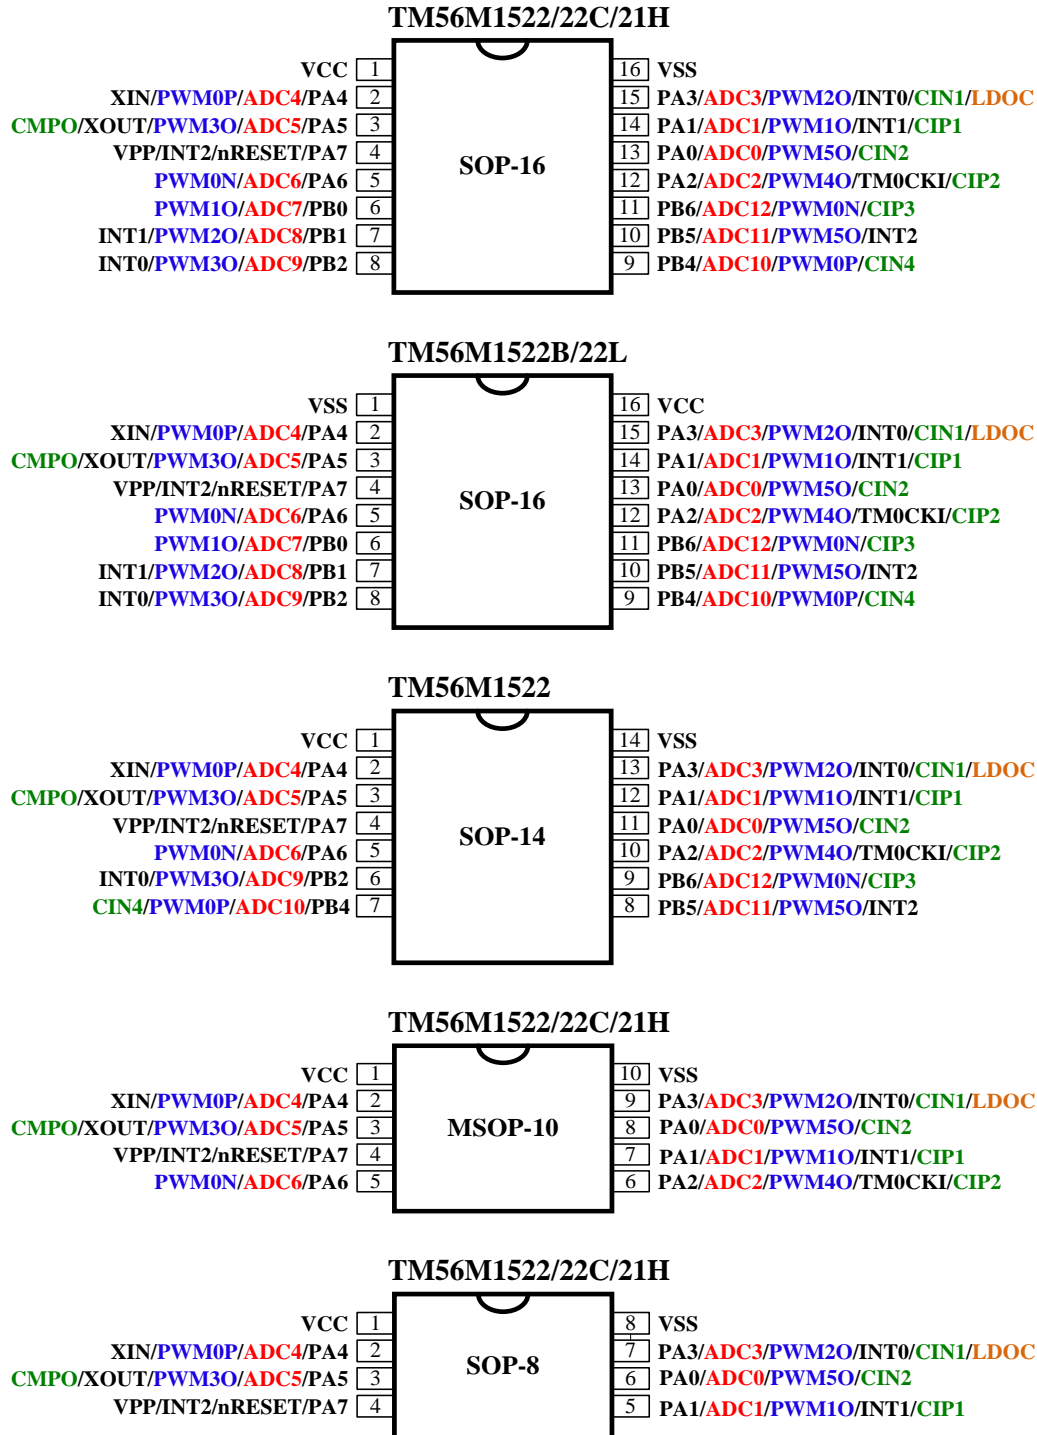

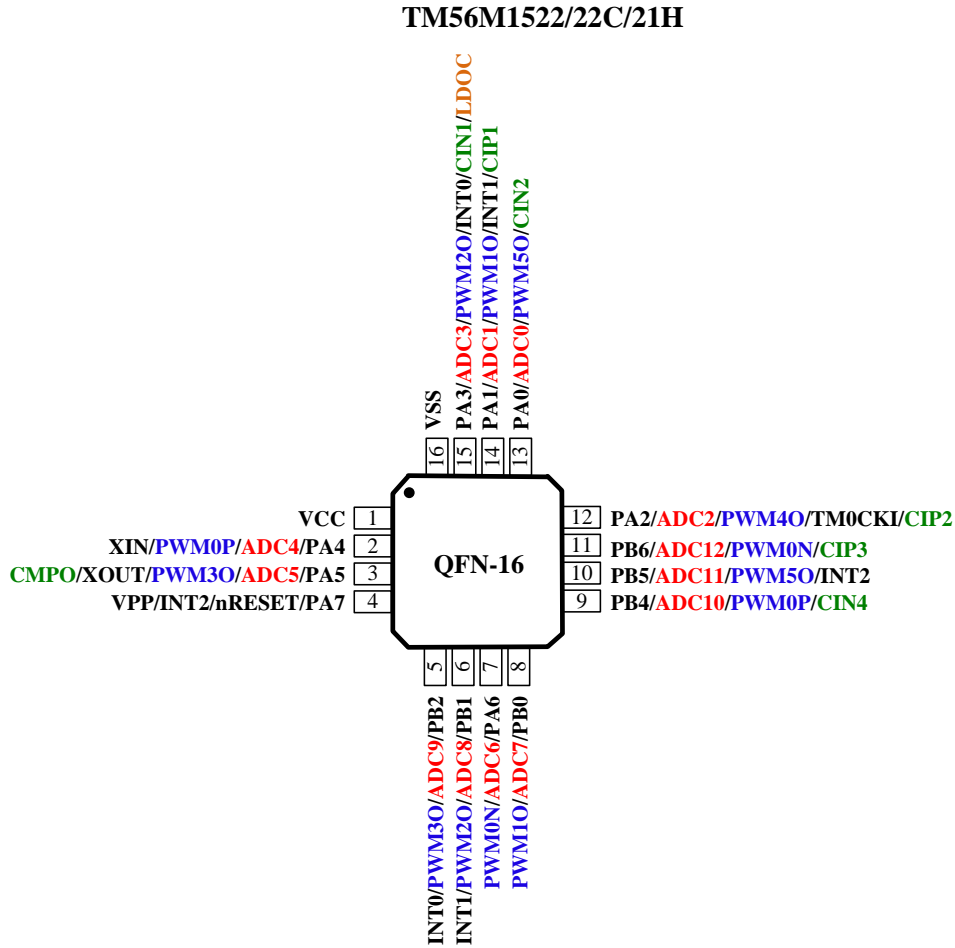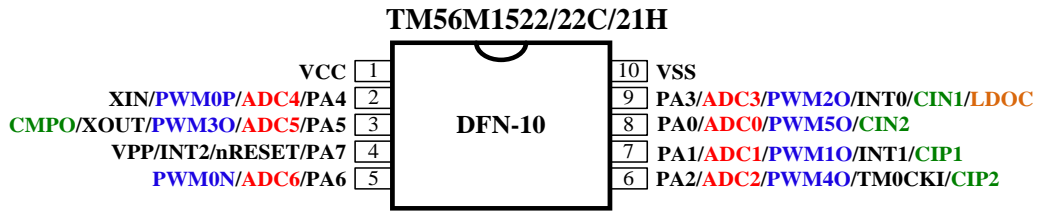

## PIN DESCRIPTIONS

Name	In/Out	Pin Description
PA0~PA7 PB0~PB2 PB4~PB6	I/O	Bit-programmable I/O port for Schmitt-trigger input, CMOS push-pull output, open-drain output or $1/2V_{CC}$ output. Pull-up/Pull-down resistors are assignable by software. <b>PA7 has no high-sink, 1/2 bias and resistor pull-down capability.</b>
nRESET	I	External active low reset
VCC, VSS	P	Power Voltage input pin and ground
VPP	I	MTP programming high voltage(9.5V) input
XIN, XOUT	–	Crystal/Resonator oscillator connection for System clock (FXT or SXT)
INT0~INT2	I	External interrupt input
TM0CKI	I	Timer0's input in counter mode
PWM0P	O	16 bits PWM0 positive output
PWM0N	O	16 bits PWM0 negative output
PWM1O~PWM5O	O	16 bits PWM1~PWM5 output
CMPO	O	Comparator status output
ADC0~ADC12	I	ADC channel input
CIN1, CIN2, CIN4	I	Comparator negative port input
CIP1~CIP3	I	Comparator positive port input
LDOC	O	1.2V LDO regulator @Max 70mA output

Programming pins:

Normal mode (7-wire): VCC / VSS / PA0 / PA1 / PA4 / PA5 / PA7(VPP)

ICP mode (5-wire): VCC / VSS / PA0 / PA1 / PA7(VPP) - When using ICP (In-Circuit Program) mode, the PCB needs to remove all components of PA0, PA1.

## PIN SUMMARY


Pin Number						Pin Name	Type	GPIO							Alternate Function			
TM56M1522/22C/21H (SOP-16)	TM56M1522B/22L (SOP-16)	TM56M1522(SOP-14)	TM56M1522/22C/21H (QFN-16)	TM56M1522/22C/21H (MSOP-10) (DFN-10)	TM56M1522/22C/21H (SOP-8)			Input				Output			PWM	ADC	Comparator	MISC
								Pull-up Control	Pull-down Control	Ext. Interrupt	Wake up	Open Drain	CMOS Push-Pull	1/2 V <sub>CC</sub> (1/2 Bias)				
2	2	2	2	2	2	PA4/ADC4/PWM0P/XIN	I/O	●	●		●	●	●	●	●	●		XIN
3	3	3	3	3	3	PA5/ADC5/PWM3O/XOUT/CMPO	I/O	●	●		●	●	●	●	●	●	●	XOUT
4	4	4	4	4	4	PA7/nRESET/INT2/VPP	I/O	●		●	●	●						nRESET/VPP
5	5	5	7	5	–	PA6/ADC6/PWM0N	I/O	●	●		●	●	●	●	●	●		
6	6	–	8	–	–	PB0/ADC7/PWM1O	I/O	●	●		●	●	●	●	●	●		
7	7	–	6	–	–	PB1/ADC8/PWM2O/INT1	I/O	●	●	●	●	●	●	●	●	●		
8	8	6	5	–	–	PB2/ADC9/PWM3O/INT0	I/O	●	●	●	●	●	●	●	●	●		
9	9	7	9	–	–	PB4/ADC10/PWM0P/CIN4	I/O	●	●		●	●	●	●	●	●	●	
10	10	8	10	–	–	PB5/ADC11/PWM5O/INT2	I/O	●	●	●	●	●	●	●	●	●		
11	11	9	11	–	–	PB6/ADC12/PWM0N/CIP3	I/O	●	●		●	●	●	●	●	●	●	
12	12	10	12	6	–	PA2/ADC2/PWM4O/TM0CKI/CIP2	I/O	●	●		●	●	●	●	●	●	●	TM0CKI
13	13	11	13	8	6	PA0/ADC0/PWM5O/CIN2	I/O	●	●		●	●	●	●	●	●	●	
14	14	12	14	7	5	PA1/ADC1/PWM1O/INT1/CIP1	I/O	●	●	●	●	●	●	●	●	●	●	
15	15	13	15	9	7	PA3/ADC3/PWM2O/INT0/CIN1/LDOC	I/O	●	●	●	●	●	●	●	●	●	●	LDOC
16	1	14	16	10	8	VSS	P											
1	16	1	1	1	1	VCC	P											

## FUNCTION DESCRIPTION

### 1 CPU Core

#### 1.1 Program ROM (PROM)

The MTP ROM of this device is 4K(TM56M1522/22B/22C/22L)/2K(TM56M1521H) words, with an extra 32-Word INFO area to store the SYSCFG. The ROM can be written multi-times and can be read as long as the PROTECT (CFGWH.15) bit of SYSCFG is not set. The SYSCFG can be read no matter PROTECT is set or cleared, but PROTECT bit can be cleared only when User ROM Code area is erased. On the other hand, if PROTECT bit is set, the user ROM code area will not be read by writer, and the user ROM code can't be updated until the PROTECT bit is cleared. The endurance of ROM is 1000 times @V<sub>cc</sub>=5V/25°C。

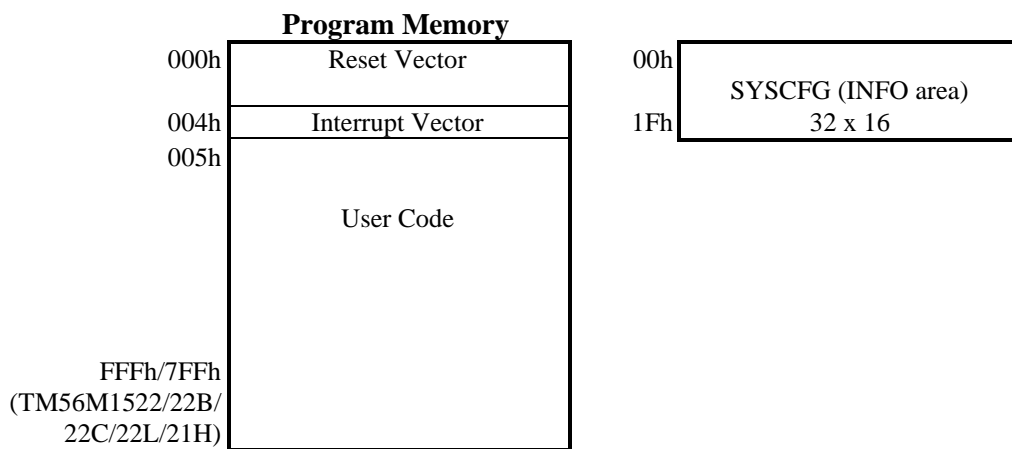

113h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RDCTL	—	—	—	—	—	—	RDCTL	
R/W	—	—	—	—	—	—	R/W	
Reset	—	—	—	—	—	—	0	0

113h.1~0 **RDCTL:** Read signal delay control for Program ROM

00: 20ns delay for read signal of Program ROM

01: 16ns delay for read signal of Program ROM

10: 12ns delay for read signal of Program ROM

11: 8ns delay for read signal of Program ROM

Change this register at slow clock for safety.

**The user must switch this register to “8ns” to enhance the performance of minimal operating voltage.**

This feature can't be emulated.

##### 1.1.1 Reset Vector (000h)

After reset, system will restart the program counter (PC) at the address 000h, all registers will revert to the default value.

##### 1.1.2 Interrupt Vector (004h)

When an interrupt occurs, the program counter (PC) will be pushed onto the stack and jumps to address 004h.

## 1.2 System Configuration Register (SYSCFG)

The System Configuration Register (SYSCFG) is located at MTP INFO area; it contains a 16 bits register (CFGWH). The SYSCFG determines the option for initial condition of CPU. It is written by PROM Write only. User can select LVR operation mode and chip operation mode by SYSCFG register. The 15<sup>th</sup> bit of CFGWH is code-protected selection bit. If this bit is 1, the data in PROM will be protected when user reads PROM.

Bit		15~0	
Default Value		0000_0010_0000_0000(TM56M1522/21H) 0000_0100_0000_0000(TM56M1522B/22C/22L)	
Bit		Description	
CFGWH	15	<b>PROTECT</b> : Code protection selection	
		0	Disable
		1	Enable
	13-12	<b>WDTE</b> : WDT Reset Enable	
		0X	Disable
		10	Enable in FAST/SLOW mode, Disable in IDLE/STOP mode
		11	Always Enable
	11-8	<b>LVR</b> : Low Voltage Reset Mode	
		0000	LV Reset 2.05V(TM56M1522/21H)/1.80V(TM56M1522B/22C/22L)
		0001	LV Reset 2.20V(TM56M1522/21H)/1.93V(TM56M1522B/22C/22L)
		0010	LV Reset 2.30V(TM56M1522/21H)/2.07V(TM56M1522B/22C/22L)
		0011	LV Reset 2.45V(TM56M1522/21H)/2.21V(TM56M1522B/22C/22L)
		0100	LV Reset 2.60V(TM56M1522/21H)/2.36V(TM56M1522B/22C/22L)
		0101	LV Reset 2.75V(TM56M1522/21H)/2.49V(TM56M1522B/22C/22L)
		0110	LV Reset 2.90V(TM56M1522/21H)/2.63V(TM56M1522B/22C/22L)
		0111	LV Reset 3.00V(TM56M1522/21H)/2.77V(TM56M1522B/22C/22L)
		1000	LV Reset 3.15V(TM56M1522/21H)/2.91V(TM56M1522B/22C/22L)
		1001	LV Reset 3.30V(TM56M1522/21H)/3.06V(TM56M1522B/22C/22L)
		1010	LV Reset 3.45V(TM56M1522/21H)/3.20V(TM56M1522B/22C/22L)
		1011	LV Reset 3.60V(TM56M1522/21H)/3.34V(TM56M1522B/22C/22L)
		1100	LV Reset 3.70V(TM56M1522/21H)/3.48V(TM56M1522B/22C/22L)
		1101	LV Reset 3.85V(TM56M1522/21H)/3.63V(TM56M1522B/22C/22L)
		1110	LV Reset 4.00V(TM56M1522/21H)/3.77V(TM56M1522B/22C/22L)
		1111	LV Reset 4.15V(TM56M1522/21H)/3.90V(TM56M1522B/22C/22L)
	7	<b>XRSTE</b> : External Pin (PA7) Reset Enable	
		0	Disable (PA7 as I/O pin)
		1	Enable
	5	<b>FIRCPSC</b> : FIRC Prescaler	
		0	Divided by 1 (16 MHz)
		1	Divided by 2 (8 MHz)
	4	<b>PORSEL</b> : POR duty cycle selection	
		0	POR enables at 100% duty cycle
		1	POR enables at 1/16 duty cycle(This feature can't be emulated)
	3-0	tenx Reserved	




### 1.3 RAM Addressing Mode

There is one Data Memory Plane in CPU. The Plane is partitioned into four banks. Each bank extends up to 7Fh (128 bytes). The lower locations of each bank are reserved for Special Function Register (SFR). Above the SFR are General Purpose Registers, implemented as static RAM. All implemented banks contain Special Function Registers. Some frequently used Special Function Registers from one bank may be mirrored in another bank for code reduction and quicker access.

Bit RP1 and RP0 (STATUS[6:5]) are the bank select bits.

[RP1, RP0]	BANK
00	0
01	1
10	2
11	3

The plane can be addressed directly or indirectly. The INDF register is not a physical register. Addressing the INDF register will cause indirect addressing. Indirect addressing is possible by using the INDF register. Any instruction using the INDF register actually accesses the register pointed to by File Select Register, FSR. Reading the INDF register itself, indirectly (FSR = '0') will read 00h. Writing to the INDF register indirectly (FSR = '0') results in a no operation (although status bit may be affected). An effective 9-bit address is obtained by concatenating the 8-bit FSR register and the IRP bit (STATUS[7]). Refer to the figure below.

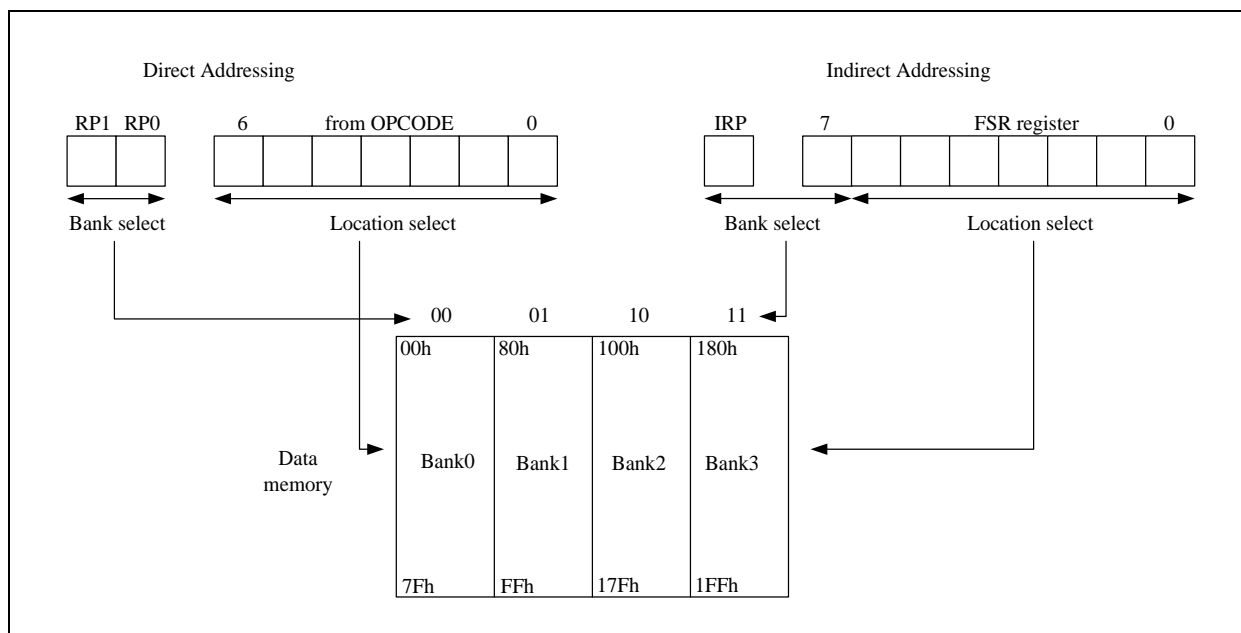

#### Direct / Indirect Addressing

**Keeping RP0=RP1=0 in the beginning of the F/W code and using the new instruction set.**

The advantage of using new instruction is user can ignore the bank location of registers and the code size can be saved. The new instruction is almost the same as the old instruction. By replacing the "F" to "X" in the instruction set can easily use the new instruction without switching the bank.

For example:

BC <b>F</b>	TM0IE	→	BC <b>X</b>	TM0IE
DEC <b>F</b>	CNT, 1	→	DEC <b>X</b>	CNT, 1
INC <b>F</b> SZ	RAM25, 0	→	INC <b>X</b> SZ	RAM25, 0
MOVW <b>F</b>	PAMOD10	→	MOVW <b>X</b>	PAMOD10
RL <b>F</b>	RAMA0, 0	→	RL <b>X</b>	RAMA0, 0
SWAP <b>F</b>	ADCTL, 0	→	SWAP <b>X</b>	ADCTL, 0

【BANK0】 000~07Fh		【BANK1】 080h~0FFh		【BANK2】 100h~17Fh		【BANK3】 180h~1FFh	
000h	<b>INDF</b>	080h	<b>INDF</b>	100h	<b>INDF</b>	180h	<b>INDF</b>
001h	<b>TM0</b>	081h	<b>OPTION</b>	101h	<b>TM0</b>	181h	<b>OPTION</b>
002h	<b>PCL</b>	082h	<b>PCL</b>	102h	<b>PCL</b>	182h	<b>PCL</b>
003h	<b>STATUS</b>	083h	<b>STATUS</b>	103h	<b>STATUS</b>	183h	<b>STATUS</b>
004h	<b>FSR</b>	084h	<b>FSR</b>	104h	<b>FSR</b>	184h	<b>FSR</b>
005h	<b>PAD</b>	085h	<b>PAMOD10</b>	105h	<b>PINMOD</b>	185h	<b>DPL</b>
006h	<b>PBD</b>	086h	<b>PAMOD32</b>	106h		186h	<b>DPH</b>
007h		087h	<b>PAMOD54</b>	107h		187h	<b>CRCDL</b>
008h		088h	<b>PAMOD76</b>	108h		188h	<b>CRCDH</b>
009h		089h	<b>PWMCTL</b>	109h	<b>LVRPD</b>	189h	<b>CRCIN</b>
00Ah	<b>PCLATH</b>	08Ah	<b>PCLATH</b>	10Ah	<b>PCLATH</b>	18Ah	<b>PCLATH</b>
00Bh	<b>INTIE</b>	08Bh	<b>INTIE</b>	10Bh	<b>INTIE</b>	18Bh	<b>INTIE</b>
00Ch	<b>INTIF</b>	08Ch	<b>PBMOD10</b>	10Ch	<b>PCH</b>	18Ch	<b>TABR</b>
00Dh	<b>INTIE1</b>	08Dh	<b>PBMOD32</b>	10Dh		18Dh	<b>CMPCCTL</b>
00Eh	<b>INTIF1</b>	08Eh	<b>PBMOD54</b>	10Eh	<b>BGTRIM</b>	18Eh	<b>CMPPNS</b>
00Fh	<b>CLKCTL</b>	08Fh	<b>PBMOD76</b>	10Fh	<b>IRCF</b>	18Fh	<b>DACTL</b>
010h	<b>TM0RLD</b>	090h		110h		190h	Don't Use
011h	<b>TM0CTL</b>	091h	<b>OPTION2</b>	111h	<b>BG2TRIM</b>	191h	
012h	<b>TM1</b>	092h	<b>PWMPRDH</b>	112h	<b>LDOCCTL</b>	192h	
013h	<b>TM1RLD</b>	093h	<b>PWMPRDL</b>	113h	<b>RDCTL</b>	193h	
014h	<b>TM1CTL</b>	094h	<b>PWM0DH</b>	114h	<b>IRCFT</b>	194h	
015h	<b>T2CTL</b>	095h	<b>PWM0DL</b>	115h		195h	
016h	<b>LVCTL</b>	096h	<b>PWM1DH</b>	116h		196h	
017h	<b>ADCDH</b>	097h	<b>PWM1DL</b>	117h		197h	
018h	<b>ADCTL</b>	098h	<b>PWM2DH</b>	118h		198h	
019h	<b>ADCTL2</b>	099h	<b>PWM2DL</b>	119h		199h	
01Ah		09Ah	<b>PWM3DH</b>	11Ah		19Ah	
01Bh		09Bh	<b>PWM3DL</b>	11Bh		19Bh	
01Ch		09Ch	<b>PWM4DH</b>	11Ch		19Ch	
01Dh		09Dh	<b>PWM4DL</b>	11Dh		19Dh	
01Eh		09Eh	<b>PWM5DH</b>	11Eh		19Eh	
01Fh		09Fh	<b>PWM5DL</b>	11Fh		19Fh	
020h	RAM Bank0 area (80 Bytes)	0A0h	RAM Bank1 area (80 Bytes)	120h	RAM Bank2 area (80 Bytes)	1A0h	Don't Use
06Fh		0EFh		16Fh		1EFh	
070h		0F0h		170h		1F0h	
07Fh		0FFh		17Fh		1FFh	
	<b>common area</b> (16 Bytes)		<b>accesses</b> <b>070h~07Fh</b>		<b>accesses</b> <b>070h~07Fh</b>		<b>accesses</b> <b>070h~07Fh</b>

◇ Example: read / write register by using direct addressing (**force RP0=RP1=0**)

CLKCTL	equ	00Fh	; SFR in Bank0
TM1	equ	012h	; SFR in Bank0
OPTION2	equ	091h	; SFR in Bank1
LVRPD	equ	109h	; SFR in Bank2
IRCF	equ	10Fh	; SFR in Bank2
DPL	equ	185h	; SFR in Bank3
RAM020	equ	020h	; RAM in Bank0
RAM0A0	equ	0A0h	; RAM in Bank1
MOVXW	TM1		; read TM1 (Bank0) to W
MOVXW	OPTION2		; read OPTION2 (Bank1) to W
MOVXW	IRCF		; read IRCF (Bank2) to W
MOVXW	DPL		; read DPL (Bank3) to W
MOVLW	16h		; W = 16h
MOVWX	RAM020		; RAM[0x020] = W = 16h
MOVWX	RAM0A0		; RAM[0x0A0] = W = 16h
MOVLW	37h		; W = 37h
MOVWX	LVRPD		; LVRPD = W = 37h, force LVR/POR disable
MOVXW	CLKCTL		; read SFR CLKCTL (00Fh) to W
MOVXW	IRCF		; read SFR IRCF (10Fh) to W
MOVLW	0Bh		; W = 0Bh
MOVWX	CLKCTL		; CLKCTL (00Fh) = W = 0Bh
MOVWX	IRCF		; IRCF (10Fh) = W = 0Bh

◇ Example: read / write register by using indirect addressing (**force RP0=RP1=0**)

BSX	IRP		; IRP = 1 => Bank2/3
MOVLW	0Fh		; W = 0Fh
MOVWX	FSR		; FSR = W = 0Fh
MOVXW	INDF		; read SFR IRCF (10Fh) to W
BSX	IRP		; IRP = 1 => Bank2/3
MOVLW	0Fh		; W = 0Fh
MOVWX	FSR		; FSR = W = 0Fh
MOVLW	0Bh		; W = 0Bh
MOVWX	INDF		; IRCF (10Fh) = W = 0Bh
BCX	IRP		; IRP = 0 => Bank0/1
MOVLW	0Fh		; W = 0Fh
MOVWX	FSR		; FSR = W = 0Fh
MOVXW	INDF		; read SFR CLKCTL (00Fh) to W
BCX	IRP		; IRP = 0 => Bank0/1
MOVLW	0Fh		; W = 0Fh
MOVWX	FSR		; FSR = W = 0Fh
MOVLW	0Bh		; W = 0Bh
MOVWX	INDF		; CLKCTL (00Fh) = W = 0Bh

## 1.4 Programming Counter (PC) and Stack


The Programming Counter is 12-bit wide and capable of addressing a 4K x 16 MTP ROM. As a program instruction is executed, the PC will contain the address of the next program instruction to be executed. The PC value is normally increased by one except for the following cases. The Reset Vector (000h) and the Interrupt Vector (004h) are provided for PC initialization and Interrupt. For CALL/GOTO instruction, PC loads lower 11 bits address from instruction word and upper 1 bit from PCLATH[3]. For RET/RETI/RETLW instruction, PC retrieves its content from the top level STACK.

Before CALL/GOTO instruction is executed, the PCLATH[3] must be set if the destination address more than 2K, otherwise the PCLATH[3] must be cleared. Similar as RAM Addressing Mode (refer section 1.3), the Chip provides new instruction set LCALL/LGOTO to replace CALL/GOTO instruction set. When using LCALL/LGOTO, user don't care about the destination address, just only keep PCLATH[3] cleared.

The low byte data of the Programming Counter (PC[7:0]) can be read and written by PCL register (002h/082h/102h/182h). The high byte data of Programming Counter (PC[11:8]) can only be read by PCH register (10Ch). The internal flag PCH\_S is used to select the source of PCH, when executing any instruction with the PCL register as the destination. Write 0x1C to PCH register can set PCH\_S, write others value to PCH register will clear PCH\_S. After reset, the PCH\_S is cleared.

When PCH\_S is cleared to '0', executing any instruction with the PCL register as the destination simultaneously causes PCH to be replaced by the contents of the PCLATH (00Ah/08Ah/10Ah/18Ah) register. This allows the entire contents of the program counter to be changed by writing the desired high byte to the PCLATH register. When the low byte is written to the PCL register, all contents of program counter will change to the values contained in the PCLATH register and those being written to the PCL register.

When PCH\_S is set to '1', executing any instruction with the PCL register as the destination the low byte is written to the PCL register and will not change the PCH. It is recommended to setting PCH\_S to '1' when using any instruction with the PCL register as the destination, but C language doesn't support this function.

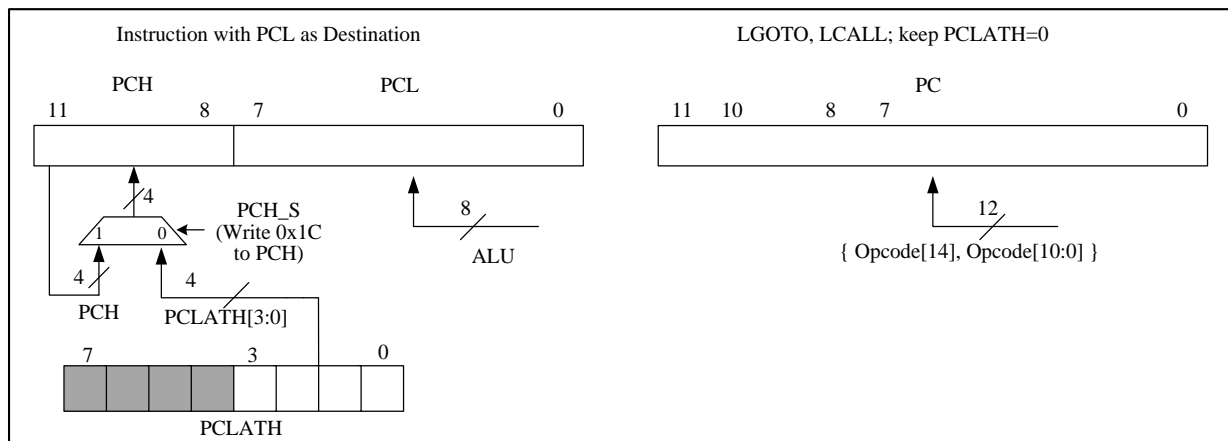

002h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PCL	PCL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

002h.7~0 **PCL**: Programming Counter data bit 7~0

00Ah	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PCLATH	GPR				PCLATH			
R/W	R/W				R/W			
Reset	0	0	0	0	0	0	0	0

00Ah.3~0 **PCLATH**: Programming Counter high byte data when instruction with PCL as destination is executed, and PCH\_S is cleared

00Ah.3 **PCLATH**: Programming Counter upper 1 bit when CALL/GOTO instruction is executed

Note: When using LCALL/LGOTO instruction must keep cleared

10Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PCH	PCH							
R/W	W				R/W			
Reset	0	0	0	0	0	0	0	0

10Ch.7~0 **PCH (W)**: Programming Counter high byte source selection when instruction with PCL as destination is executed

write 0x1C to set PCH\_S = 1: PCH keep the original value

write others to clear PCH\_S = 0: PCH is from PCLATH

After reset, the PCH\_S is cleared

10Ch.3~0 **PCH (R)**: Programming Counter data bit 11~8

The STACK is 12-bit wide and 8-level in depth. The LCALL instruction and hardware interrupt will push STACK level in order, while the RET/RETI/RETLW instruction pops STACK level in order. For table lookup, the device offer the powerful table read instructions TABRL, TABRH to return the 16-bit ROM data into W and TABR register by setting DPTR={DPH, DPL} registers. It also offers another way to read the 16-bit ROM data into W and TABR register by setting TABR (18Ch) for C language.

◇ Example: To look up the PROM data located “TABLE1” and “TABLE2”.

```

ORG      000h                                ; Reset Vector
LGOTO    START

START:
    MOVLW 00h
    MOVWX RAM020                            ; Set lookup table's address
    MOVLW 1Ch                               ; Write 1Ch to PCH to set PCH_S flag
    MOVWX PCH

LOOP:
    MOVXW  RAM020                            ; Move index value to W register
    LCALL  TABLE1                          ; To lookup data
    ...
    INCX   RAM020, 1                        ; Increment the index address for next address
    ...
    LGOTO  LOOP                             ; Go to LOOP label
    ...
    MOVLW  (TABLE2 >>8) & 0xff
    MOVWX  DPH
    MOVLW  (TABLE2) & 0xff
    MOVWX  DPL                             ; DPTR = {DPH, DPL} = TABLE2
; Table Read by instructions TABRL / TABRH
    TABRL                                     ; Read PROM low byte data to W and TABR
                                           (W = TABR = 86h)
    TABRH                                     ; Read PROM high byte data to W and TABR
                                           (W = TABR = 19h)
    ...
; Table Read by SFR TABR
    MOVLW  01h                             ; TABR write 01h = instruction TABRL
    MOVWX  TABR                            ; Read PROM low byte data to W and TABR
                                           (W = TABR = 86h)
    MOVXW  TABR                            ; Read TABR to W (W = 86h)
    MOVLW  02h                             ; TABR write 02h = instruction TABRH
    MOVWX  TABR                            ; read PROM high byte data to W and TABR
                                           (W = TABR = 19h)
    MOVXW  TABR                            ; read TABR to W (W = 19h)
    ...
ORG      X00h
TABLE1:
    ADDWX  PCL, 1                          ; Add the W with PCL, the result back in PCL.
    RETLW  55h                             ; W=55h when return
    RETLW  56h                             ; W=56h when return
    RETLW  58h                             ; W=58h when return
    ...

```

**TABLE2:**

```
.DT      0x1986      ; 16-bit ROM data
.DT      0x3719
...
```

**Note:** The chip define 256 ROM address as one page, so that ROM has 16 pages, 000h~0FFh, 100h~1FFh, ..., F00h~FFFh. On the other words, PC[11:8] can be define as page. A lookup table must be located at the same page to avoid getting wrong data. Thus, the lookup table has maximum 255 data for above example with starting a lookup table at X00h (X = 1, 2, 3, ..., E, F). If a lookup table has fewer data, it needs not setting the starting address at X00h, but only confirms all lookup table data are located at the same page.

18Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TABR	TABR							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

- 18Ch.7~0
1. TABR write 01h = instruction TABRL (Read PROM low byte data to W and TABR)
  2. TABR write 02h = instruction TABRH (Read PROM high byte data to W and TABR)
  3. Don't write the value other than 01h or 02h into register TABR
  4. After step.1 or step.2, read TABR to get main ROM table read value for C language
- Table Read for ASM: Support instruction TABRL / TABRH or register TABR. Suggest not using the method of register TABR. SFR HWAUTO=1 is also suggested.*
- Table Read for C: using register TABR. Only be used outside or inside the interrupt service routine. Don't utilize it inside and outside interrupt service routine simultaneously. Otherwise, something will be wrong.*

#### 1.4.1 ALU and Working (W) Register

The ALU is 8-bit wide and capable of addition, subtraction, shift and logical operations. In two-operand instructions, typically one operand is the W register, which is an 8-bit non-addressable register used for ALU operations. The other operand is either a file register or an immediate constant. In single operand instructions, the operand is either W register or a file register. Depending on the instruction executed, the ALU may affect the values of Carry (C), Digit Carry (DC), and Zero (Z) Flags in the STATUS register. The C and DC flags operate as a /Borrow and /Digit Borrow, respectively, in subtraction.

Note: /Borrow represents inverted of Borrow register.

/Digit Borrow represents inverted of Digit Borrow register.

#### 1.4.2 STATUS Register (003h/083h/103h/183h)

This register contains the arithmetic status of ALU and the Reset status. The STATUS register can be the destination for any instruction, as with any other register. If the STATUS register is the destination for an instruction that affects the Z, DC or C bits, then the write to these three bits is disabled. These bits are set or cleared according to the device logic. It is recommended, therefore, that only BCX, BSX and MOVWX instructions are used to alter the STATUS Register because these instructions do not affect those bits.

STATUS	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reset Value	0	0	0	0	0	0	0	0
R/W	R/W	R/W	R/W	R	R	R/W	R/W	R/W
Bit	Description							
7	<b>IRP:</b> Register Bank Select bit (used for indirect addressing) 0 = Bank 0,1 (000h - 0FFh) 1 = Bank 2,3 (100h - 1FFh)							

6:5	<b>RP1:RP0:</b> Register Bank Select bits (used for direct addressing) 00 = Bank 0 (000h - 07Fh) 01 = Bank 1 (080h - 0FFh) 10 = Bank 2 (100h - 17Fh) 11 = Bank 3 (180h - 1FFh) Each bank is 128 bytes	
4	<b>TO:</b> Time Out Flag 0: after Power On Reset or CLRWDT/SLEEP instruction 1: WDT time out occurs	
3	<b>PD:</b> Power Down Flag 0: after Power On Reset or CLRWDT instruction 1: after SLEEP instruction	
2	<b>Z:</b> Zero Flag 0: the result of a logic operation is not zero 1: the result of a logic operation is zero	
1	<b>DC:</b> Decimal Carry Flag or Decimal / Borrow Flag	
	ADD instruction 0: no carry 1: a carry from the low nibble bits of the result occurs	SUB instruction 0: a borrow from the low nibble bits of the result occurs 1: no borrow
0	<b>C:</b> Carry Flag or /Borrow Flag	
	ADD instruction 0: no carry 1: a carry occurs from the MSB	SUB instruction 0: a borrow occurs from the MSB 1: no borrow

◇ Example: Write immediate data into STATUS register.

```
MOVLW    00h
MOVWX    STATUS           ; Clear STATUS register
```

◇ Example: Bit addressing set and clear STATUS register.

```
BSX      STATUS, 0        ; Set C=1
BCX      STATUS, 0        ; Clear C=0
```

◇ Example: Determine the C flag by BTXSS instruction.

```
BTXSS    STATUS, 0        ; Check the carry flag
LGOTO    LABEL_1          ; If C=0, goto LABEL_1
LGOTO    LABEL_2          ; If C=1, goto LABEL_2
```



## 2 Reset

This device can be RESET in four ways.

- Power-On-Reset (POR)
- Low Voltage Reset (LVR)
- External Pin Reset (XRST)
- Watchdog Timer Reset (WDTR)

Resets can be caused by Power on Reset (POR), External Pin Reset (XRST), Watchdog Timer Reset (WDTR), or Low Voltage Reset (LVR). The CFGWH controls the Reset functionality. After Reset, the SFRs are returned to their default value, the program counter (PC) is cleared, and the system starts running from the reset vector 000h place. The TO and PD flags at status register (STATUS) are indicate system reset status.

### 2.1 Power on Reset (POR)

After Power-On-Reset, all system and peripheral control registers are then set to their default hardware Reset values.

### 2.2 Low Voltage Reset (LVR)

The Low Voltage Reset features static reset when supply voltage is below a threshold level. There are 16 threshold levels can be selected. The LVR's operation mode is defined by the CFGWH register. See the following LVR Selection Table; user must also consider the lowest operating voltage of operating frequency.

LVR Selection Table:


LVR level (TM56M1522/21H)	Operating voltage	LVR level (TM56M1522B/22C/22L)	Operating voltage
LVR2.05	$5.5V > V_{CC} > 2.05V$	LVR1.80	$5.5V > V_{CC} > 1.80V$
LVR2.20	$5.5V > V_{CC} > 2.20V$	LVR1.93	$5.5V > V_{CC} > 1.93V$
LVR2.30	$5.5V > V_{CC} > 2.30V$	LVR2.07	$5.5V > V_{CC} > 2.07V$
LVR2.45	$5.5V > V_{CC} > 2.45V$	LVR2.21	$5.5V > V_{CC} > 2.21V$
LVR2.60	$5.5V > V_{CC} > 2.60V$	LVR2.36	$5.5V > V_{CC} > 2.36V$
LVR2.75	$5.5V > V_{CC} > 2.75V$	LVR2.49	$5.5V > V_{CC} > 2.49V$
LVR2.90	$5.5V > V_{CC} > 2.90V$	LVR2.63	$5.5V > V_{CC} > 2.63V$
LVR3.00	$5.5V > V_{CC} > 3.00V$	LVR2.77	$5.5V > V_{CC} > 2.77V$
LVR3.15	$5.5V > V_{CC} > 3.15V$	LVR2.91	$5.5V > V_{CC} > 2.91V$
LVR3.30	$5.5V > V_{CC} > 3.30V$	LVR3.06	$5.5V > V_{CC} > 3.06V$
LVR3.45	$5.5V > V_{CC} > 3.45V$	LVR3.20	$5.5V > V_{CC} > 3.20V$
LVR3.60	$5.5V > V_{CC} > 3.60V$	LVR3.34	$5.5V > V_{CC} > 3.34V$
LVR3.70	$5.5V > V_{CC} > 3.70V$	LVR3.48	$5.5V > V_{CC} > 3.48V$
LVR3.85	$5.5V > V_{CC} > 3.85V$	LVR3.63	$5.5V > V_{CC} > 3.63V$
LVR4.00	$5.5V > V_{CC} > 4.00V$	LVR3.77	$5.5V > V_{CC} > 3.77V$
LVR4.15	$5.5V > V_{CC} > 4.15V$	LVR3.90	$5.5V > V_{CC} > 3.90V$

Different  $F_{sys}$  have different system minimum operating voltage, reference to Operating Voltage of DC characteristics, if current system voltage is low than minimum operating voltage and lower LVR is selected, then the system maybe enters dead-band and error occurs.

### 2.3 External Pin Reset (XRST)

The External Pin Reset (XRST) can be disabled or enabled by XRSTE at CFGWH register. External pin reset should be kept low for at least 2 SIRC clock cycles to ensure reset can active. The External Pin Reset also sets all the control registers to their default value but the TO/PD flags will not affected by these resets.

External reset pin (nRESET) is low level active. The system is running when reset pin is high level voltage input. The reset pin receives the low voltage and the system is reset. The external reset can reset the system during power on duration, and good external reset circuit can protect the system to avoid operating at inappropriate power condition.

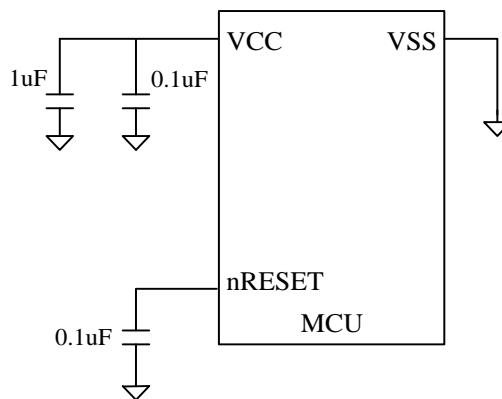

### 2.4 Watchdog Timer Reset (WDTR)

The WDT reset can be disabled or enabled through the CFGWH register. Set WDTPSC to define the period during which WDT reset occurs. WDT reset counter can be cleared by device Reset or CLRWDT bit. WDT reset also set all the control registers to their default value. The TO/PD flags are not affected by WDT resets.

◇ Example: Defining Reset Vector

```

ORG      000h                ; Reset Vector
LGOTO    START              ; Jump to user program address.

ORG      010h
START:
...
...                ; 010h, The head of user program
...
LGOTO    START

```


### 3 Clock Circuitry and Operation Mode

#### 3.1 System Clock

The device is designed with dual-clock system. There are four kinds of clock source, FXT (Fast Crystal) Clock, SXT (Slow Crystal) Clock, SIRC (Slow Internal RC) Clock and FIRC (Fast Internal RC) Clock. Each clock source can be applied to CPU kernel as system clock. When in IDLE mode, the Slow-clock (SIRC or SXT) can be configured to keep oscillating to provide clock source to T2 block, or the SIRC provides clock source to WKT/WDT block. Refer to the Figure as below.

After Reset, the device is running at SLOW mode with 95 KHz(@V<sub>CC</sub>=5V) SIRC. S/W should select the proper clock rate for chip operation safety. The higher V<sub>CC</sub> allows the chip to run at a higher System clock frequency. In a typical condition, a 16 MHz System clock rate requires V<sub>CC</sub> > 2V@(25°C).

The CLKCTL (0Fh) SFR controls the System clock operating. H/W automatically blocks the S/W abnormally setting for this register. Never to write both FASTSTP=1 and CPUCKS=1. It is recommended to write this SFR bit by bit.

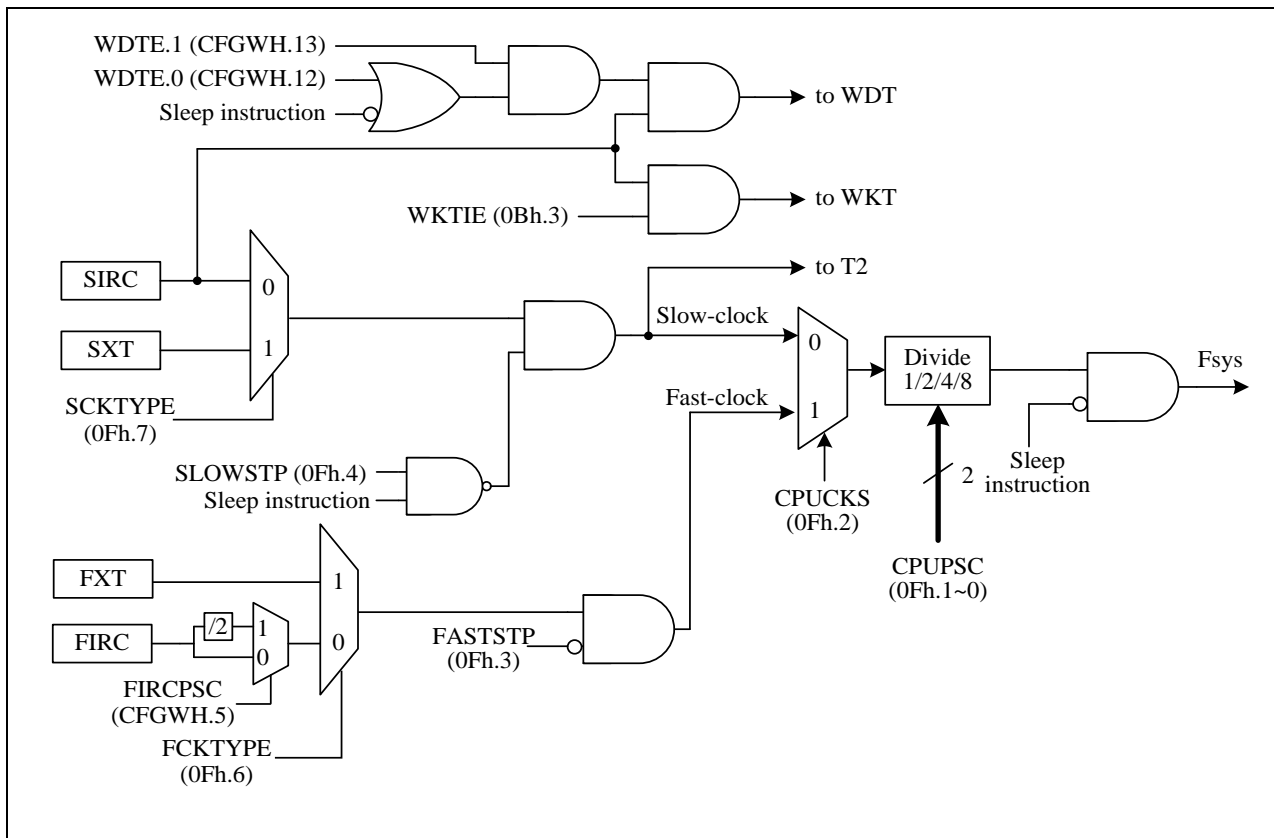

**Clock Scheme Block Diagram**

The frequency of FIRC can be adjusted by IRCF (10Fh). When IRCF=00h, frequency is the lowest. When IRCF=7Fh, frequency is the highest. With this function, we can adjust the frequency of FIRC after power on. Each IC may have different default value of IRCF, to make sure the frequency of FIRC=16 MHz after Power on Reset.

**FAST Mode:**

In this mode, the program is executed using FIRC or FXT as CPU clock (Fsys). The Timer0, Timer1 blocks are also driven by Fast-clock. The PWM0 block can be driven by Fsys, FIRC (16 MHz), or FIRC\*2 (32 MHz) by setting PWMCKS (91h.5~4). T2 can be driven by Slow-clock, Fsys/128, or FIRC/512 (16 MHz/512) by setting T2CKS (15h.3~2).

**SLOW Mode:**

After power-on or reset, device enters SLOW mode, the default Slow-clock is SIRC. In this mode, the Fast-clock can be stopped (by FASTSTP=1, for power saving) or running (by FASTSTP=0), and Slow-clock is enabled. All peripheral blocks (Timer0, Timer1, etc...) clock source are Slow-clock in the SLOW mode, except PWM and T2 blocks, which can select other clock source. There are two kinds of SLOW clock that can be selected, SIRC and SXT.

**IDLE Mode:**

After executing the SLEEP instruction, if SIRC or SXT is still oscillating, it means entering IDLE mode. IDLE mode is terminated by Reset or enabled Interrupts wake up. There are two ways to keep SIRC or SXT oscillating in IDLE mode.


- (1) Set SLOWSTP=0, before executing the SLEEP instruction, the SIRC or SXT can still oscillate. In this situation, Slow-clock can continue to oscillate to provide T2 block running in IDLE mode.
- (2) Set WKTIE=1 or WDTE=11, before executing the SLEEP instruction, the SIRC can still oscillate to keep WKT/WDT operating in IDLE mode.

**STOP Mode:**

When SLOWSTP (0Fh.4) is set, WKTIE (0Bh.3) is cleared and WDTE=0x or 10, all blocks will be turned off and the chip will enter the “STOP Mode” after executing the SLEEP instruction. STOP mode is similar to IDLE mode. The difference is all clock oscillators either Fast-clock or Slow-clock are stopped and no clocks are generated.

### 3.2 Dual System Clock Modes Transition

The device is operated in one of four modes: FAST mode, SLOW mode, IDLE mode, and STOP mode.

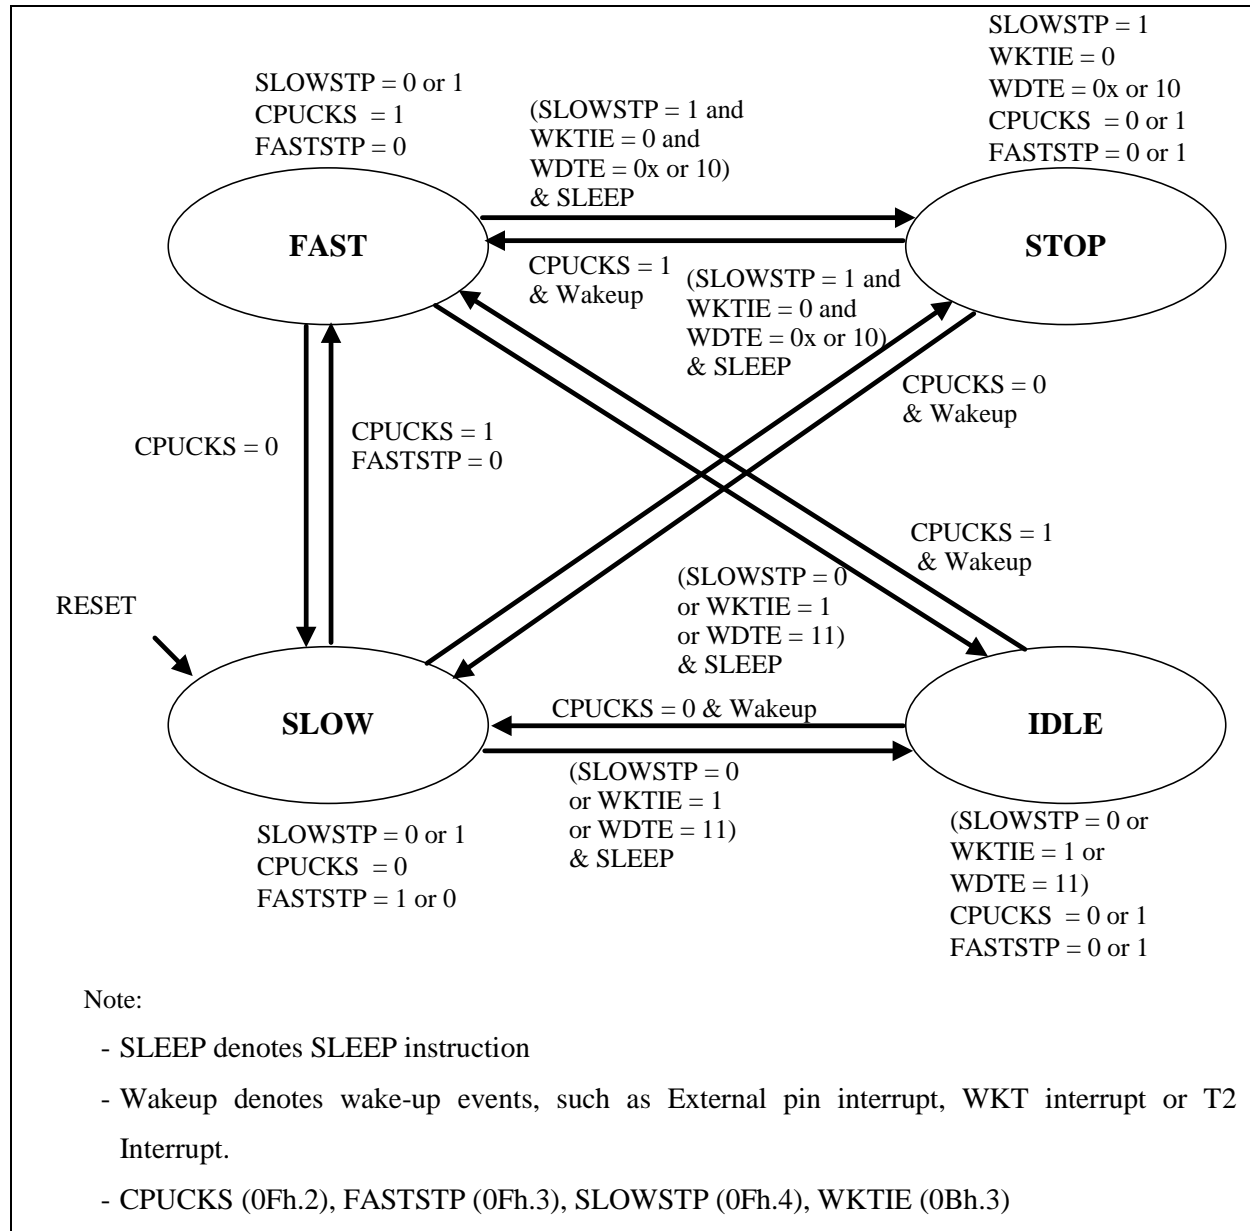

**CPU Operation Block Diagram**

**CPU Mode & Clock Functions Table:**

Mode	Fsys	Fast-clock	Slow-clock	TM0/TM1	T2	WKT	WDT	Wakeup event
FAST	Fast-clock	Run	Run	Run	Run	Run	Run	X
SLOW	Slow-clock	Set by FASTSTP	Run	Run	Run	Run	Run	X
IDLE	Stop	Stop	Run	Stop	Set by T2CKS	Set by WKTIE	Set by WDTE	WKT/IO/T2
STOP	Stop	Stop	Stop	Stop	Stop	Stop	Stop	IO

### ● FAST mode switches to SLOW mode

The following steps are suggested to be executed by order when FAST mode switches to SLOW mode:

- (1) Switch to Slow-clock (CPUCKS=0)
- (2) Stop Fast-clock (FASTSTP=1)

◇ Example: Switch FAST mode to SLOW mode.

BCX	CPUCKS	; Fsys=Slow-clock
BSX	FASTSTP	; Disable Fast-clock

### ● SLOW mode switches to FAST mode

SLOW mode can be enabled by CPUCKS=0 in CLKCTL register. The following steps are suggested to be executed by order when SLOW mode switches to FAST mode:

- (1) Enable Fast-clock (FASTSTP=0)
- (2) Switch to Fast-clock (CPUCKS=1)

◇ Example: Switch SLOW mode to FAST mode (The Fast-clock stop).

BCX	FASTSTP	; Enable Fast-clock
NOP		
BSX	CPUCKS	; Fsys=Fast-clock

### ● IDLE mode Setting

The IDLE mode can be configured by following setting in order:

- (1) Enable Slow-clock (SLOWSTP=0) or WKT (WKTIE=1) or WDT (WDTE=11b)
- (2) Switch T2 clock source to Slow-clock (T2CKS=0)
- (3) Execute SLEEP instruction

IDLE mode can be wake up by External interrupt, WKT interrupt and T2 interrupt.

◇ Example: Switch FAST/SLOW mode to IDLE mode.

BCX	SLOWSTP	; Enable Slow-clock after execute SLEEP instruction
MOVLW	0000 <u>00</u> 00b	
MOVWX	T2CTL	
SLEEP		; Enter IDLE mode

## ● STOP Mode Setting

The STOP mode can be configured by following setting in order:

- (1) Stop Slow-clock (SLOWSTP=1)
- (2) Stop WKT (WKTIE=0)
- (3) Execute SLEEP instruction

STOP mode can be woken up only by external pin interrupt and pin-change.

Note: CPU will not enter STOP mode if WDTE=11b

◇ Example: Switch FAST/SLOW mode to STOP mode.

```
BSX          SLOWSTP          ; Disable Slow-clock after execute SLEEP instruction
MOVLW        00000000b        ; Disable WKT counting
MOVWX        INTIE
SLEEP        ; Enter STOP mode.
```

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.3 **WKTIE**: Wakeup Timer interrupt enable and Wakeup Timer enable  
 0: disable  
 1: enable

0Fh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CLKCTL	SCKTYPE	FCKTYPE	—	SLOWSTP	FASTSTP	CPUCKS	CPUPSC	
R/W	R/W	R/W	—	R/W	R/W	R/W	R/W	
Reset	0	0	—	0	1	0	1	1

0Fh.7 **SCKTYPE**: Slow-clock select  
 0: Slow-clock is SIRC  
 1: Slow-clock is SXT

0Fh.6 **FCKTYPE**: Fast-clock select  
 0: Fast-clock is FIRC  
 1: Fast-clock is FXT

0Fh.4 **SLOWSTP**: Stop Slow-clock after execute SLEEP instruction  
 0: Slow-clock keeps running after execute SLEEP instruction  
 1: Slow-clock stops running after execute SLEEP instruction


0Fh.3 **FASTSTP**: Fast-clock stop  
 0: Fast-clock is running  
 1: Fast-clock stops running

0Fh.2 **CPUCKS**: System clock source select  
 0: Slow-clock  
 1: Fast-clock

0Fh.1~0 **CPUPSC**: System clock source prescaler. System clock source  
 00: divided by 8  
 01: divided by 4  
 10: divided by 2  
 11: divided by 1

### 3.3 System Clock Oscillator

In the Fast Internal RC (FIRC) mode, the on-chip oscillator generates 16 MHz system clock. Since power noise degrades the performance of Internal Clock Oscillator, placing power supply bypass capacitors 1  $\mu\text{F}$  and 0.1  $\mu\text{F}$  very close to VCC/VSS pins improves the stability of clock and the overall system.

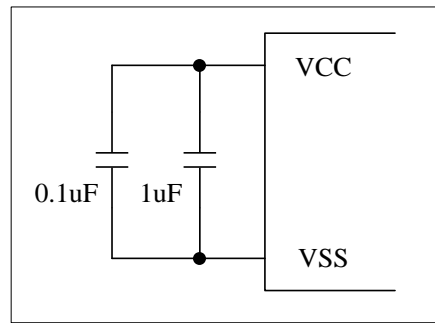

Internal RC Mode




## 4 Interrupt

The Chip has 1 level, 1 vector and 11 interrupt sources. Each interrupt source has its own enable control bit. An interrupt event will set its individual pending flag, no matter its enable control bit is 0 or 1.

If the corresponding interrupt enable bit (INTIE[7:0], INTIE1[4], INTIE1[1:0]) has been set, it would trigger CPU to service the interrupt. CPU accepts interrupt at the end of current executed instruction cycle. In the meanwhile, a “LCALL 004” instruction is inserted to CPU, and i-flag is set to prevent recursive interrupt nesting.

The i-flag is cleared in the instruction after the “RETI” instruction. That is, at least one instruction in main program is executed before service the pending interrupt. The interrupt event is level triggered. F/W must clear the interrupt event register while serving the interrupt routine.

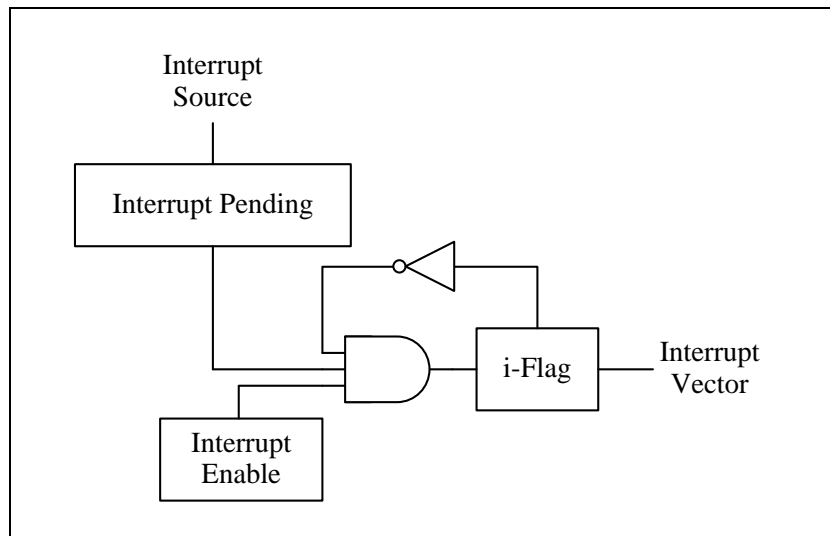

◇ Example: Setup INT1 (PA1) interrupt request with rising edge trigger

```

ORG      000h                ; Reset Vector
LGOTO    START              ; Goto user program address

ORG      004h                ; All interrupt vector
LGOTO    INT                ; If INT1 (PA1) input occurred rising edge

ORG      005h
START:
MOVLW    0000xxxxb
MOVWX    PAMOD10            ; Select INT1 Pin Mode as mode 0000b
                                ; Open drain output low or input with Pull-up

MOVLW    xxxxxx1xb
MOVWX    PAD                ; Release INT1, it becomes Schmitt-trigger
                                ; input with input pull-up resistor

MOVLW    xx1xxxxxb
MOVWX    OPTION            ; Set INT1 interrupt trigger as rising edge
MOVLW    1111101b
MOVWX    INTIF             ; Clear INT1 interrupt request flag
MOVLW    00000010b
MOVWX    INTIE             ; Enable INT1 interrupt

MAIN:
...
LGOTO    MAIN

INT:
MOVWX    20h                ; Store W data to SRAM 20h
MOVXW    STATUS            ; Get STATUS data
MOVWX    21h                ; Store STATUS data to SRAM 21h

BTXSC    INT1IF            ; Check INT1IF bit
LCALL    INT1_SUB          ; INT1IF = 1, jump to INT1 interrupt service routine
...

EXIT_INT:
MOVXW    21h                ; Get SRAM 21h data
MOVXW    STATUS            ; Restore STATUS data
MOVXW    20h                ; Restore W data
RETI                     ; Return from interrupt

INT1_SUB:                  ; INT1 interrupt service routine
...
MOVLW    1111101b
MOVWX    INTIF             ; Clear INT1 interrupt request flag
RET

```

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

- 0Bh.7 **ADCIE:** ADC interrupt enable  
0: disable  
1: enable
- 0Bh.6 **T2IE:** T2 interrupt enable  
0: disable  
1: enable
- 0Bh.5 **TM1IE:** Timer1 interrupt enable  
0: disable  
1: enable
- 0Bh.4 **TM0IE:** Timer0 interrupt enable  
0: disable  
1: enable
- 0Bh.3 **WKTIE:** Wakeup Timer interrupt enable and Wakeup Timer enable  
0: disable  
1: enable
- 0Bh.2 **INT2IE:** INT2 interrupt enable  
0: disable  
1: enable
- 0Bh.1 **INT1IE:** INT1 interrupt enable  
0: disable  
1: enable
- 0Bh.0 **INT0IE:** INT0 interrupt enable  
0: disable  
1: enable

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

- 0Ch.7 **ADCIF:** ADC interrupt event pending flag  
This bit is set by H/W after ADC end of conversion, write 0 to this bit will clear this flag
- 0Ch.6 **T2IF:** T2 interrupt event pending flag  
This bit is set by H/W while T2 overflows, write 0 to this bit will clear this flag
- 0Ch.5 **TM1IF:** Timer1 interrupt event pending flag  
This bit is set by H/W while Timer1 overflows, write 0 to this bit will clear this flag
- 0Ch.4 **TM0IF:** Timer0 interrupt event pending flag  
This bit is set by H/W while Timer0 overflows, write 0 to this bit will clear this flag
- 0Ch.3 **WKTIF:** Wakeup Timer interrupt event pending flag  
This bit is set by H/W while Wakeup Timer is timeout, write 0 to this bit will clear this flag
- 0Ch.2 **INT2IF:** INT2 pin falling interrupt pending flag  
This bit is set by H/W at INT2 pin's falling edge, write 0 to this bit will clear this flag
- 0Ch.1 **INT1IF:** INT1 pin falling/rising interrupt pending flag  
This bit is set by H/W at INT1 pin's falling/rising edge, write 0 to this bit will clear this flag
- 0Ch.0 **INT0IF:** INT0 pin falling/rising interrupt pending flag  
This bit is set by H/W at INT0 pin's falling/rising edge, write 0 to this bit will clear this flag

0Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE1	—	—	—	CMPIE	—	—	PWMIE	LVDIE
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Dh.4 **CMPIE**: Comparator interrupt enable

0: disable

1: enable

0Dh.1 **PWMIE**: PWM interrupt enable

0: disable

1: enable

0Dh.0 **LVDIE**: LVD interrupt enable

0: disable

1: enable

0Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF1	—	—	—	CMPIF	—	—	PWMIF	LVDIF
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Eh.4 **CMPIF**: Comparator interrupt event pending flag

This bit is set by H/W while CMPO match trigger condition, write 0 to this bit will clear this flag

0Eh.1 **PWMIF**: PWM interrupt event pending flag

This bit is set by H/W after PWM period counter roll over, write 0 to this bit will clear this flag

0Eh.0 **LVDIF**: LVD interrupt event pending flag

This bit is set by H/W after  $V_{CC} < V_{LVD}$ , write 0 to this bit will clear this flag

81h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
OPTION	HWAUTO	INT0EDG	INT1EDG	—	WDTPSC		WKTPSC	
R/W	R/W	R/W	R/W	—	R/W		R/W	
Reset	0	0	0	—	1	1	1	1

81h.6 **INT0EDG**: INT0 pin interrupt edge selection

0: falling edge to trigger

1: rising edge to trigger

81h.5 **INT1EDG**: INT0 pin interrupt edge selection

0: falling edge to trigger

1: rising edge to trigger

91h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
OPTION2	—	—	PWMCKS		—	INT2SEL	INT1SEL	INT0SEL
R/W	—	—	R/W		—	R/W	R/W	R/W
Reset	—	—	0	0	—	0	0	0

91h.2 **INT2SEL**: INT2 pin select

0: PA7

1: PB5

91h.1 **INT1SEL**: INT1 pin select

0: PA1

1: PB1

91h.0 **INT0SEL**: INT0 pin select

0: PA3

1: PB2

## 5 I/O Port

### 5.1 PA0-PA7, PB0-PB2, PB4-PB6

Each IO has 4 bits as the mode setting. The mode setting can include the following functions: open drain output, CMOS output, pull-up resistor, pull-down resistor, pin changed wake-up, PWMO and so on. All IO except PA7 support two sink current options, which are defined by the HSINK (105h.2). **PA7 has no high-sink, 1/2 bias and resistor pull-down capability.**

These pins can be operated in different modes as below table.

PAxMOD PBxMOD	PADx PBDx	PA0~PA7, PB0~PB2, PB4~PB6 pin function	Pin State	Resistor Pull-up	Digital Input	Pin Changed Wakeup
<b>0000b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Pull-up	Y	Y	-
<b>0001b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Hi-Z	-	Y	-
<b>0010b</b>	0	CMOS Output (except PWMx)	Drive Low	-	-	-
	1		Drive High	-	-	-
<b>0011b</b>	X	Analog input/output for ADCx / CINx / CIPx / XT* / LDOC	Hi-Z	-	-	-

\*: XT mean crystal oscillator

**I/O Pin Function Table 1**

PAxMOD PBxMOD	PADx PBDx	PA0~PA7*, PB0~PB2, PB4~PB6 pin function	Pin State	Resistor Pull-down	Digital Input	Pin Changed Wakeup
<b>0100b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Pull-down*	Y*	Y	-
<b>0101b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Hi-Z	-	Y	-
<b>0110b</b>	0	CMOS Output (except PWMx)	Drive Low	-	-	-
	1		Drive High	-	-	-
<b>0111b</b>	X	Function CMOS output for PWMx	-	-	-	-

\*: PA7 has no high-sink, 1/2 bias and resistor pull-down capability.

**I/O Pin Function Table 2**

PAxMOD PBxMOD	PADx PBDx	PA0~PA7, PB0~PB2, PB4~PB6 pin function	Pin State	Resistor Pull-up	Digital Input	Pin Changed Wakeup
<b>1000b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Pull-up	Y	Y	Y
<b>1001b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Hi-Z	-	Y	Y
<b>1010b</b>	0	CMOS Output (except PWMx)	Drive Low	-	-	-
	1		Drive High	-	-	-
<b>1011b</b>		Reserved				

**I/O Pin Function Table 3**


PAxMOD PBxMOD	PADx PBDx	PA0~PA7*, PB0~PB2, PB4~PB6 pin function	Pin State	Resistor Pull-down	Digital Input	Pin Changed Wakeup
<b>1100b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Pull-down*	Y*	Y	Y
<b>1101b</b>	0	Open Drain	Drive Low	-	-	-
	1	Input	Hi-Z	-	Y	Y
<b>1110b</b>	0	CMOS Output (except PWMx)	Drive Low	-	-	-
	1		Drive High	-	-	-
<b>1111b</b>	X	Analog output for 1/2 V <sub>CC</sub> (1/2 bias)(except PA7)	1/2 V <sub>CC</sub>	-	-	-
		- (PA7)	Pull-up			

\*: PA7 has no high-sink, 1/2 bias and resistor pull-down capability.

**I/O Pin Function Table 4**

Pin Name	PAxMOD / PBxMOD Setting		
	0011b (Analog in/out)	0111b (Digital output)	1111b (Analog output)
PA0	ADC0 CIN2	PWM5O	1/2 bias
PA1	ADC1 CIP1	PWM1O	1/2 bias
PA2	ADC2 CIP2	PWM4O	1/2 bias
PA3	ADC3 CIN1 LDOC	PWM2O	1/2 bias
PA4	ADC4 XIN	PWM0P	1/2 bias
PA5	ADC5 XOUT	PWM3O	1/2 bias
PA6	ADC6	PWM0N	1/2 bias
PA7	-	-	Pull-up
PB0	ADC7	PWM1O	1/2 bias
PB1	ADC8	PWM2O	1/2 bias
PB2	ADC9	PWM3O	1/2 bias
PB4	ADC10 CIN4	PWM0P	1/2 bias
PB5	ADC11	PWM5O	1/2 bias
PB6	ADC12 CIP3	PWM0N	1/2 bias

**Special function for PxxMOD Table**

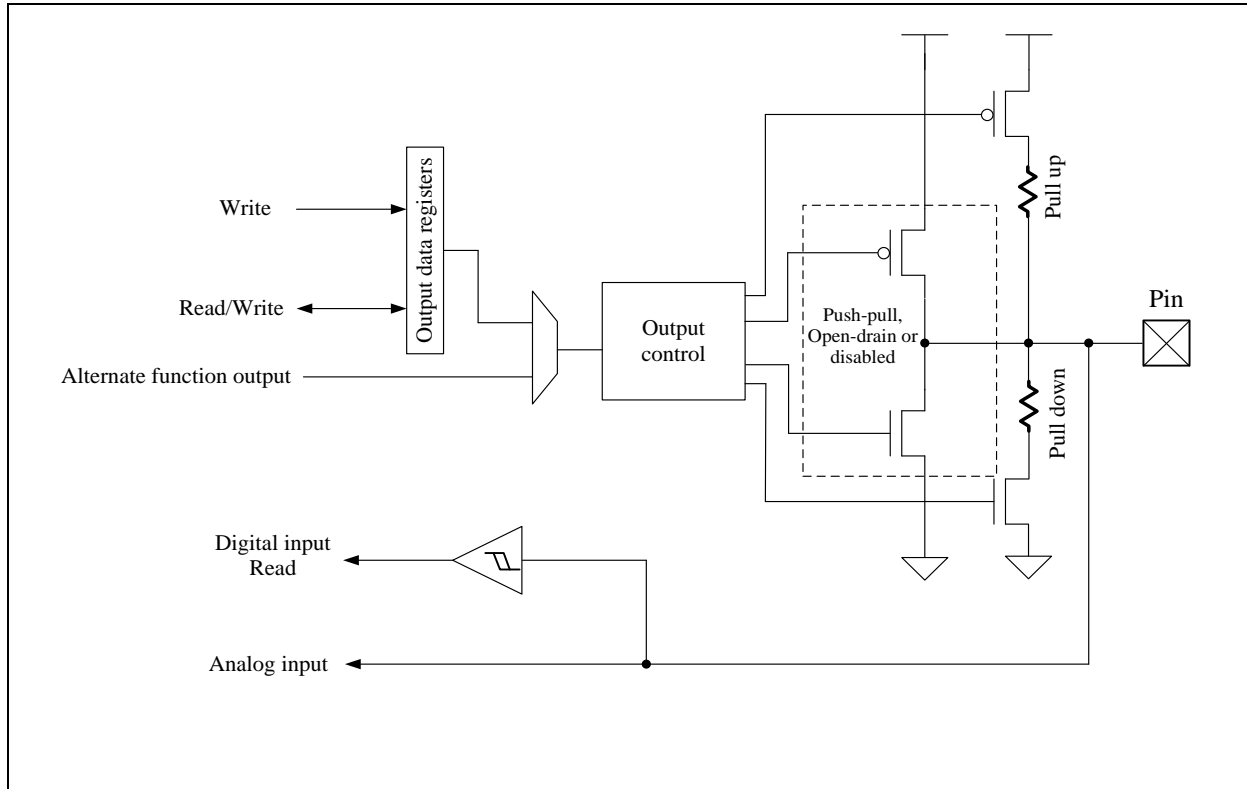

General Pin Structure

85h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PAMOD10	PA1MOD				PA0MOD			
R/W	R/W				R/W			
Reset	0	0	0	1	0	0	0	1

86h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PAMOD32	PA3MOD				PA2MOD			
R/W	R/W				R/W			
Reset	0	0	0	1	0	0	0	1

87h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PAMOD54	PA5MOD				PA4MOD			
R/W	R/W				R/W			
Reset	0	0	0	1	0	0	0	1

88h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PAMOD76	PA7MOD				PA6MOD			
R/W	R/W				R/W			
Reset	0	0	0	0	0	0	0	1

88h.7~4 **PA7MOD ~ PA0MOD:** PA7~PA0 Pin Mode Control

88h.3~0 0000: Open drain or digital input with pull-up

87h.7~4 0001: Open drain or digital input

87h.3~0 0010: CMOS Push-pull

86h.7~4 0011: Analog input/output

86h.3~0 0100: Open drain or digital input with pull-down(PA7 has no pull-down)

85h.7~4 0101: Open drain or digital input

85h.3~0 0110: CMOS Push-pull

0111: Alternate function output

1000: Open drain or digital input with pull-up and pin-changed wakeup  
 1001: Open drain or digital input and pin-changed wakeup  
 1010: CMOS Push-pull  
 1011: Reserved  
 1100: Open drain or digital input with pull-down and pin-changed wakeup(PA7 has no pull-down)  
 1101: Open drain or digital input and pin-changed wakeup  
 1110: CMOS Push-pull  
 1111: 1/2 V<sub>CC</sub> (1/2 bias) (except PA7) or pull-up(PA7)

8Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PBMOD10	PB1MOD				PB0MOD			
R/W	R/W				R/W			
Reset	0	0	0	1	0	0	0	1

8Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PBMOD32	-				PB2MOD			
R/W	-				R/W			
Reset	-				0	0	0	1

8Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PBMOD54	PB5MOD				PB4MOD			
R/W	R/W				R/W			
Reset	0	0	0	1	0	0	0	1

8Fh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PBMOD76	-				PB6MOD			
R/W	-				R/W			
Reset	-				0	0	0	1

8Fh.3~0 **PB6MOD ~ PB4MOD, PB2MOD ~ PB0MOD:** PB6~PB4 and PB2~PB0 Pin Mode Control

8Eh.7~4 0000: Open drain or digital input with pull-up  
 8Eh.3~0 0001: Open drain or digital input  
 8Dh.3~0 0010: CMOS Push-pull  
 8Ch.7~4 0011: Analog input  
 8Ch.3~0 0100: Open drain or digital input with pull-down  
 0101: Open drain or digital input  
 0110: CMOS Push-pull  
 0111: Alternate function output  
 1000: Open drain or digital input with pull-up and pin-changed wakeup  
 1001: Open drain or digital input and pin-changed wakeup  
 1010: CMOS Push-pull  
 1011: Reserved  
 1100: Open drain or digital input with pull-down and pin-changed wakeup  
 1101: Open drain or digital input and pin-changed wakeup  
 1110: CMOS Push-pull  
 1111: 1/2 V<sub>CC</sub> (1/2 bias)

05h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PAD	PAD							
R/W	R/W							
Reset	1	1	1	1	1	1	1	1

05h.7~0 **PAD:** PA7~PA0 data

06h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PBD	PBD							



R/W	R/W							
Reset	1	1	1	1	1	1	1	1

06h.7~0 **PBD**: PB7~PB0 data

105h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PINMOD	—	—	Reserved	—	—	HSINK	Reserved	Reserved
R/W	—	—	R	—	—	R/W	R/W	R/W
Reset	—	—	x	—	—	1	0	0

105h.5 **Reserved**: read as unknown after reset

105h.2 **HSINK**: All IO ports high sink current enable

0: low sink current


1: high sink current. PA7 has no high-sink capability.

105h.1 **Reserved**: must be kept at 0

105h.0 **Reserved**: must be kept at 0

## 5.2 Pin Change Wake Up

All of the IO pins also have the pin-change wake up capability.

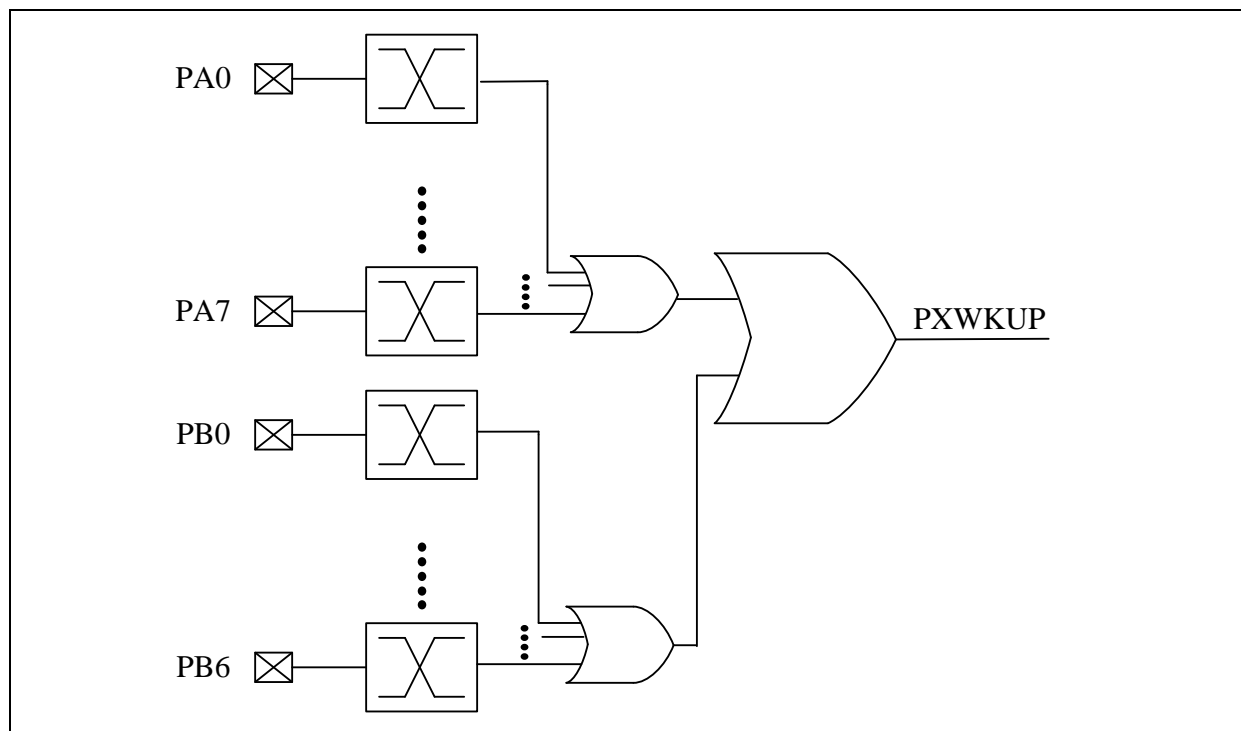


## 6 Peripheral Functional Block

### 6.1 Watchdog (WDT) /Wakeup (WKT) Timer

The WDT and WKT share the same built-in internal RC Oscillator and have individual counters. The overflow period of WDT, WKT can be selected by individual prescaler (WDTPSC[1:0], WKTTPSC[1:0]). The WDT timer is cleared by the CLRWDT instruction. If the Watchdog is enabled, the WDT generates the chip reset signal.

The WKT timer is an interval timer, WKT time out will generate WKT Interrupt Flag (WKTIF). The WKT timer is cleared/stopped by WKTIE=0. Set WKTIE=1, the WKT timer will always count regardless at any CPU operating mode.

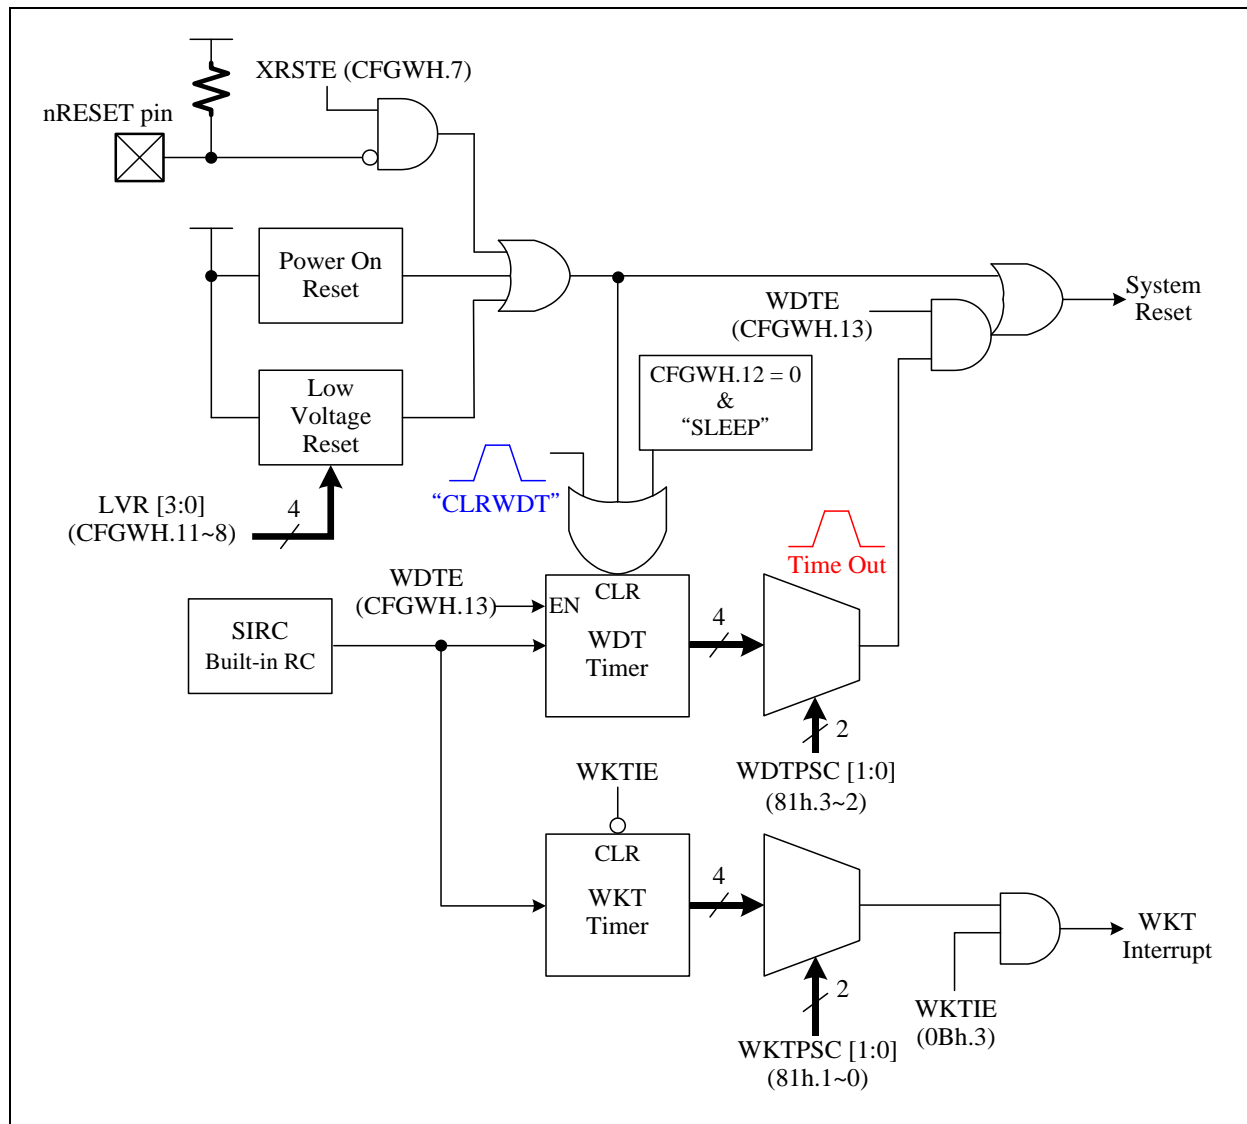

WDT/WKT Block Diagram

The WDT's behavior in different Mode is shown as below table.

Mode	CFGWH[13:12]		WDT
	WDTE[1]	WDTE[0]	
Normal Mode	0	0	Stop
	0	1	Stop
	1	0	Run
	1	1	Run
Power-down Mode (SLEEP)	0	0	Stop
	0	1	Stop
	1	0	Stop
	1	1	Run

Watchdog clear is controlled by CLRWDT instruction.

◇ Example: Clear watchdog timer by CLRWDT instruction.

```

MAIN:    ...                ; Execute program.
          CLRWDT              ; Execute CLRWDT instruction.
          ...
          LGOTO    MAIN

```

◇ Example: Setup WDT time.

```

          MOVLW    00000111b
          MOVWX    OPTION          ; Select WDT Time out=168 ms @5V
          ...

```

◇ Example: Set WKT period and interrupt function.

```

          MOVLW    00000110b
          MOVWX    OPTION          ; Select WKT period=42 ms @5V
          MOVLW    11110111b     ; Clear WKT interrupt flag by using byte operation
          MOVWX    INTIF           ; Don't use bit operation "BCX WKTIF" to clear

          BSX      WKTIE           ; Enable WKT interrupt function

```

03h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
STATUS	IRP	RP1	RP0	TO	PD	Z	DC	C
R/W	R/W	R/W	R/W	R	R	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

03h.4 **TO:** WDT time out flag, read-only  
 0: after Power On Reset or CLRWDT / SLEEP instructions  
 1: WDT time out occurs

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Ch.3 **WKTIF:** Wakeup Timer interrupt event pending flag  
 This bit is set by H/W while Wakeup Timer is timeout, write 0 to this bit will clear this flag

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.3 **WKTIE:** Wakeup Timer interrupt enable and Wakeup Timer enable  
 0: disable  
 1: enable

81h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
OPTION	HWAUTO	INT0EDG	INT1EDG	—	WDTPSC		WKTTPSC	
R/W	R/W	R/W	R/W	—	R/W		R/W	
Reset	0	0	0	—	1	1	1	1

81h.3~2 **WDTPSC:** WDT period (@V<sub>CC</sub>=5V)  
 00: 84 ms  
 01: 168 ms  
 10: 672 ms  
 11: 1344 ms

81h.1~0 **WKTTPSC:** WKT period (@V<sub>CC</sub>=5V)  
 00: 10.5 ms  
 01: 21 ms  
 10: 42 ms  
 11: 84 ms




Timer0(TM0) (01h.7~0) is an 8-bit wide register. It can be read or written as any other register. Besides, Timer0 increases itself periodically and automatically rolls over a new "offset value" (TM0RLD) while it rolls over based on the pre-scaled clock source, which can be Fsys/2 or TM0CKI (PA2) rising/falling input. The Timer0 increase rate is determined by "Timer0 Pre-Scale" (TM0PSC) register. The Timer0 always generates TM0IF (0Ch.4) when its count rolls over. It generates Timer0 Interrupt if TM0IE (0Bh.4) is set. Timer0 can be stopped counting if the TM0STP (11h.6) bit is set.



The following timing diagram describes the Timer0 works in pure Timer mode.

When the Timer0 prescaler (TM0PSC) is written, the internal 8-bit prescaler will be cleared to 0 to make the counting period correct at the first Timer0 count. TM0CLK is the internal signal that causes the Timer0 to increase by 1 at the end of TM0CLK. TM0WR is also the internal signal that indicates the Timer0 is directly written by instruction; meanwhile, the internal 8-bit prescaler will be cleared. When Timer0 counts from FFh to TM0RLD, TM0IF (Timer0 Interrupt Flag) will be set to 1 and generate interrupt if TM0IE (Timer0 Interrupt Enable) is set.

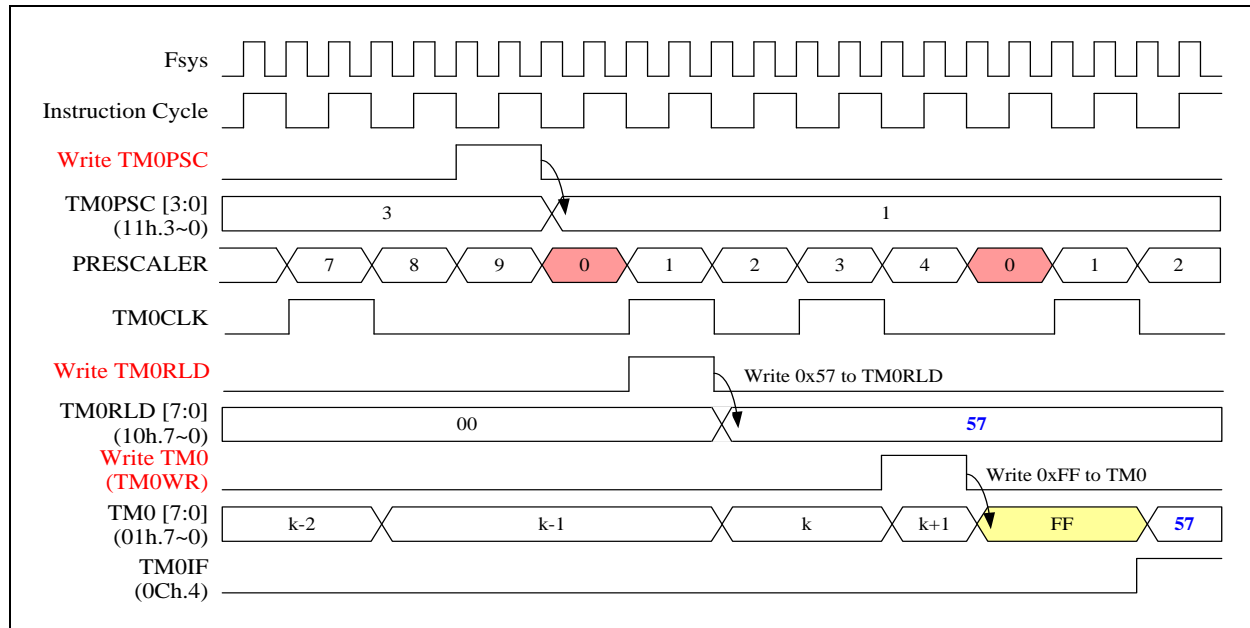

**Timer0 works in Timer mode (TM0CKS=0)**

The equation of Timer0 interrupt time value is as following:

$$\text{Timer0 interrupt frequency} = F_{\text{sys}} / 2 / \text{TM0PSC} / (256 - \text{TM0RLD})$$

◇ Example: Setup Timer0 work in Timer mode, if  $F_{\text{sys}} = 8 \text{ MHz}$

; Setup Timer0 clock source and divider

MOVLW	00x <b>00101</b> b	; TM0CKS = 0, Timer0 clock is instruction cycle
MOVWX	TM0CTL	; TM0PSC = 0101b, divided by 32

; Setup Timer0 reload data

MOVLW	80h	
MOVWX	TM0RLD	; Set Timer0 reload data = 128

; Setup Timer0

BSX	TM0STP	; Timer0 stops counting
CLRXL	TM0	; Clear Timer0 content

; Enable Timer0 and interrupt function

MOVLW	111 <b>0</b> 1111b	
MOVWX	INTIF	; Clear Timer0 request interrupt flag
BSX	TM0IE	; Enable Timer0 interrupt function
BCX	TM0STP	; Enable Timer0 counting


$$\text{Timer0 interrupt frequency} = F_{\text{sys}} / 2 / \text{TM0PSC} / (256 - \text{TM0RLD}),$$

$$F_{\text{sys}} = 8 \text{ MHz}, \text{TM0PSC} = \text{div } 32, \text{TM0RLD} = 128$$

$$\text{Timer0 interrupt frequency} = 8 \text{ MHz} / 2 / 32 / (256 - 128) = 0.976 \text{ KHz}$$

The following timing diagram describes the Timer0 works in Counter mode.

If TM0CKS=1 then Timer0 counter source clock is from TM0CKI pin. TM0CKI signal is synchronized by instruction cycle ( $F_{sys}/2$ ) that means the high/low time durations of TM0CKI must be longer than one instruction cycle time ( $F_{sys}/2$ ) to guarantee each TM0CKI's change will be detected correctly by the synchronizer.

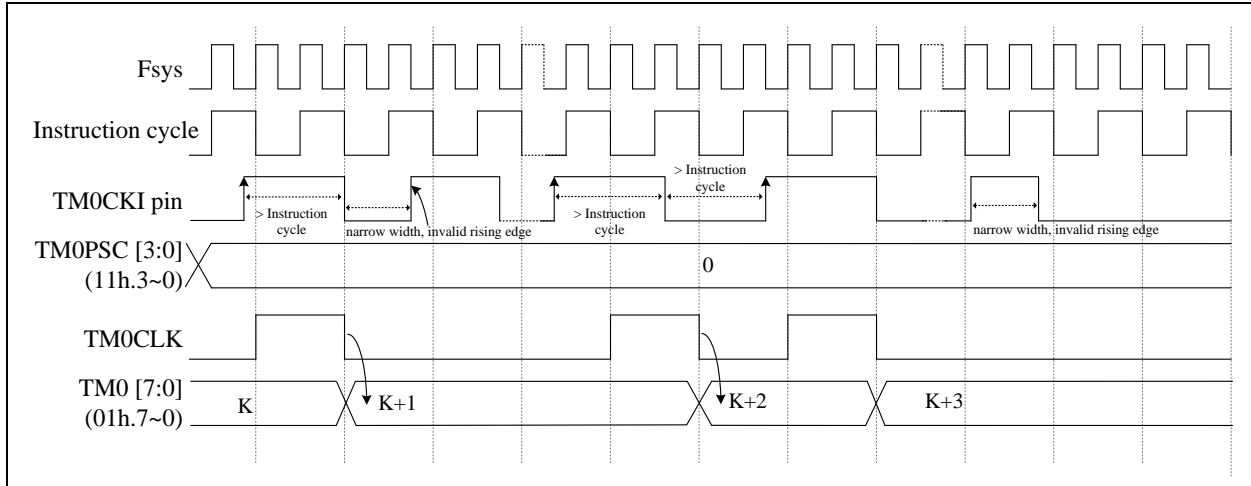

**Timer0 works in Counter mode for TM0CKI (TM0EDG=0), TM0CKS=1**

◇ Example: Setup TM0 work in Counter mode and clock source from TM0CKI pin (PA2)

; Setup Timer0 clock source and divider

```
MOVLW    00110000B
```

```
MOVW     TM0CTL
```

; TM0EDG = 1, counting edge is falling edge

; TM0CKS = 1, Timer0 clock is TM0CKI

; TM0PSC = 0000b, divided by 1

; Setup Timer0

```
BSX      TM0STP
```

```
CLR      TM0
```

; Timer0 stops counting

; Clear Timer0 content

; Enable Timer0 and read Timer0 counter

```
BCX      TM0STP
```

```
...
```

```
BSX      TM0STP
```

```
MOVW     TM0
```

; Enable Timer0 counting

; Timer0 stops counting

; Read Timer0 content



01h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM0	TM0							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

01h.7~0 **TM0**: Timer0 content

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.4 **TM0IE**: Timer0 interrupt enable  
0: disable  
1: enable

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Ch.4 **TM0IF**: Timer0 interrupt event pending flag  
This bit is set by H/W while Timer0 overflows, write 0 to this bit will clear this flag

10h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM0RLD	TM0RLD							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

10h.7~0 **TM0RLD**: Timer0 reload data

11h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM0CTL	—	TM0STP	TM0EDG	TM0CKS	TM0PSC			
R/W	—	R/W	R/W	R/W	R/W			
Reset	—	0	0	0	0	0	0	0

11h.6 **TM0STP**: Stop Timer0  
0: Timer0 runs  
1: Timer0 stops


11h.5 **TM0EDG**: Timer0 prescaler counting edge for TM0CKI pin  
0: rising edge  
1: falling edge

11h.4 **TM0CKS**: Timer0 prescaler clock source  
0: Fsys/2  
1: TM0CKI pin (PA2 pin)


11h.3~0 **TM0PSC**: Timer0 prescaler. Timer0 prescaler clock source divided by  
0000: 1                      0001: 2                      0010: 4                      0011: 8  
0100: 16                    0101: 32                    0110: 64                    0111: 128  
1xxx: 256

### 6.3 Timer1


Timer1(TM1) (12h.7~0) is an 8-bit wide register. It can be read or written as any other register. Besides, Timer1 increases itself periodically and automatically reloads a new "offset value" (TM1RLD) while it rolls over based on the pre-scaled instruction clock ( $F_{sys}/2$ ). The Timer1 increase rate is determined by TM1PSC register. It generates Timer1 interrupt if the TM1IE bit is set. Timer1 can be stopped counting if the TM1STP bit is set.

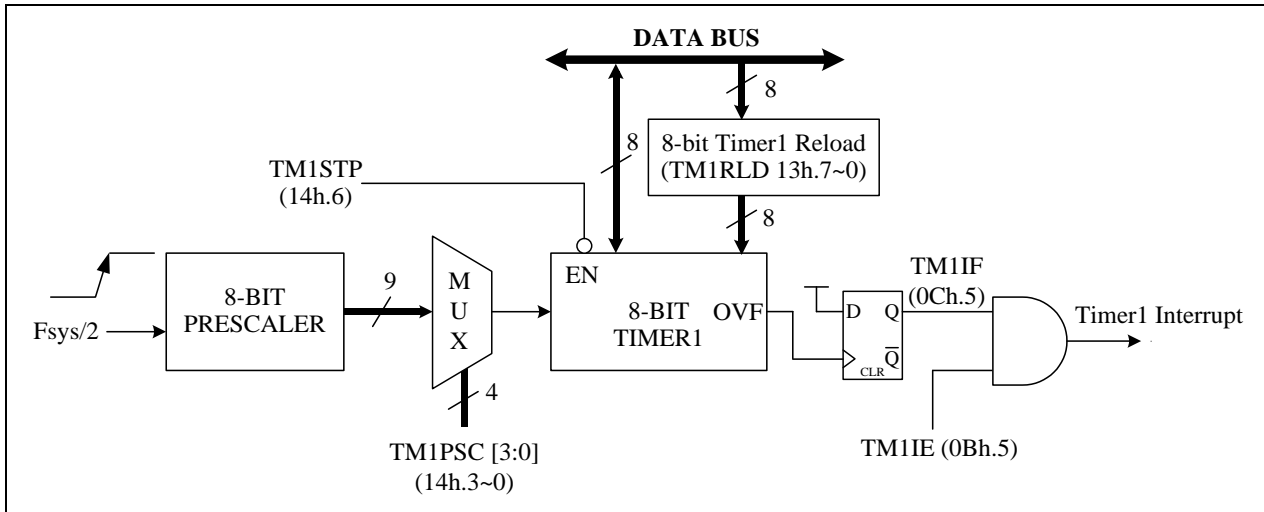

**Timer1 Block Diagram**

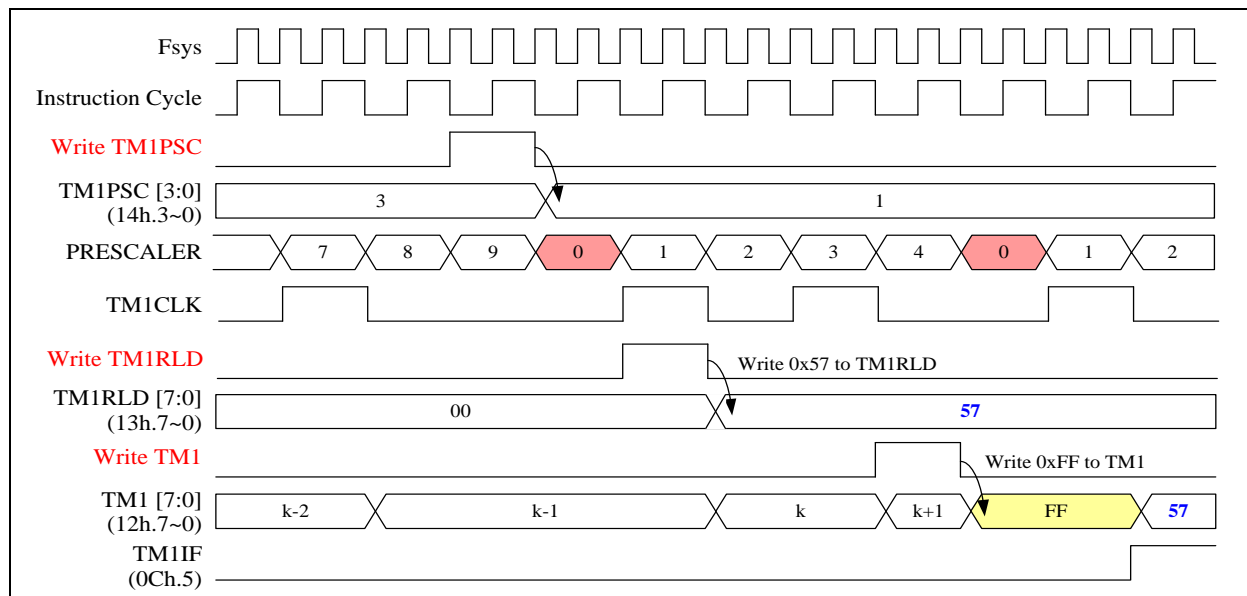

**Timer1 Timing Diagram**

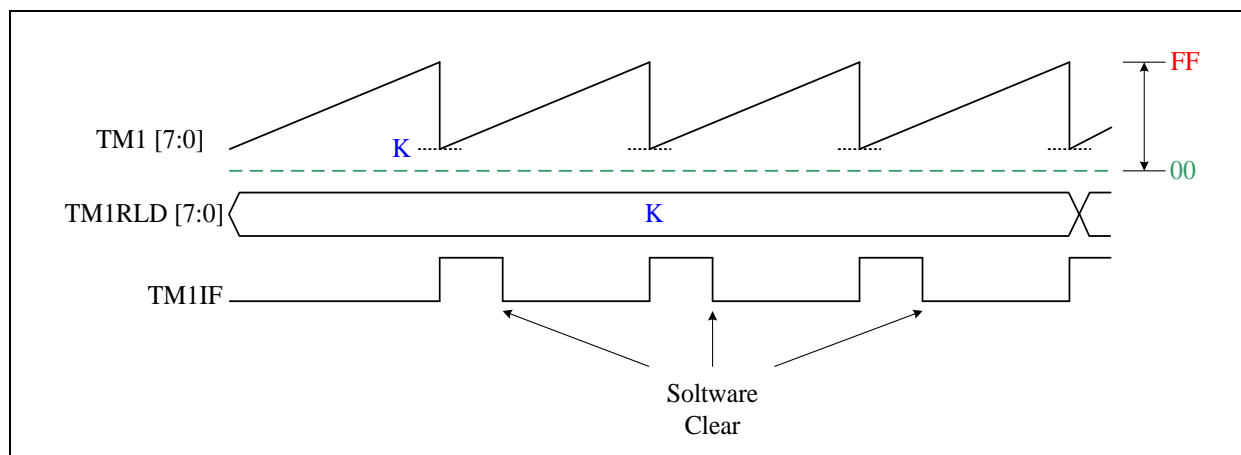
**Timer1 Reload Diagram**

◇ Example: CPU is running in SLOW mode,  $F_{sys} = \text{Slow-clock} / \text{CPUPSC} = 95 \text{ KHz} / 2 = 47.5 \text{ KHz}$

; Setup Timer1 clock source and divider

MOVLW 00000011b

MOVWX TM1CTL

; TM1PSC = 0011b, divided by 8

; Setup Timer1 reload data

MOVLW FFh

MOVWX TM1RLD

; Set Timer1 reload data = 255

; Setup Timer1

BSX TM1STP

; Timer1 stops counting

CLR X TM1

; Clear Timer1 content

; Enable Timer1 and interrupt function

MOVLW 11011111b

MOVWX INTIF

; Clear Timer1 request interrupt flag

BSX TM1IE

; Enable Timer1 interrupt function

BCX TM1STP

; Enable Timer1 counting

Timer1 interrupt frequency =  $F_{sys} / 2 / \text{TM1PSC} / (256 - \text{TM1RLD})$ ,

$F_{sys} = 47.5 \text{ KHz}$ , TM1PSC = div 8, TM1RLD = 255

Timer1 interrupt frequency =  $47.5 \text{ KHz} / 2 / 8 / (256 - 255) = 2.969 \text{ KHz}$

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.5 **TM1IE**: Timer1 interrupt enable  
0: disable  
1: enable

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Ch.5 **TM1IF**: Timer1 interrupt event pending flag  
This bit is set by H/W while Timer1 overflows, write 0 to this bit will clear this flag

12h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM1	TM1							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

12h.7~0 **TM1**: Timer1 content

13h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM1RLD	TM1RLD							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

13h.7~0 **TM1RLD**: Timer1 reload data


14h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TM1CTL	—	TM1STP	—	—	TM1PSC			
R/W	—	R/W	—	—	R/W			
Reset	—	0	—	—	0	0	0	0

14h.6 **TM1STP**: Stop Timer1  
0: Timer1 runs  
1: Timer1 stops

14h.3~0 **TM1PSC**: Timer1 prescaler. Timer1 prescaler clock source divided by  
0000: 1      0001: 2      0010: 4      0011: 8  
0100: 16      0101: 32      0110: 64      0111: 128  
1xxx: 256

## 6.4 T2:15-bit Timer

The T2 is a 15-bit counter and the clock sources are from Slow-clock, Fsys/128, or FIRC/512 (16 MHz/512). It is used to generate time base interrupt and T2 counter block clock. The T2 content cannot be read by instructions. It generates interrupt flag T2IF (0Ch.6) with the clock divided by 32768/16384/8192/128 depends on T2PSC[1:0] (15h.1~0) register bits. The following figure shows the block diagram of T2.

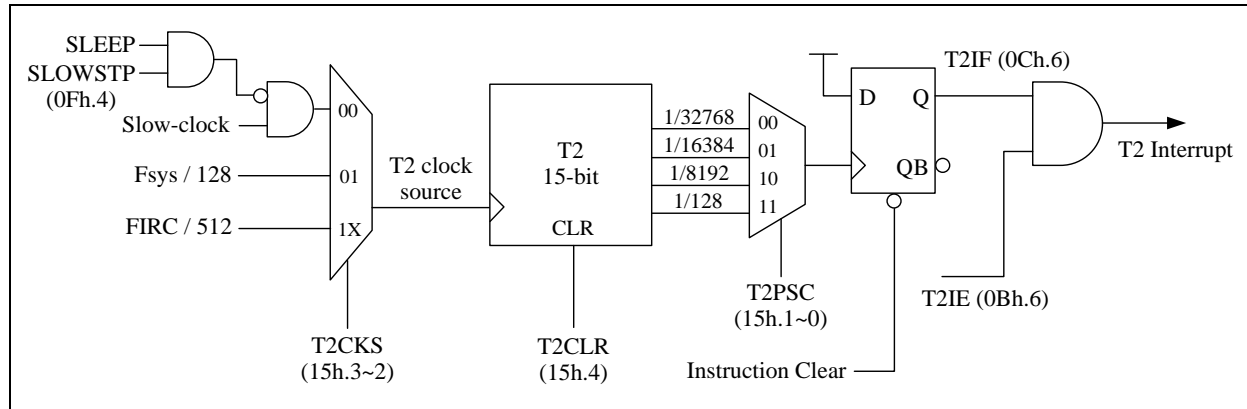

**T2 Block Diagram**

◇ Example: CPU is running at FAST mode,  $F_{sys} = \text{Fast-clock} / \text{CPUPSC} = \text{FIRC} / 2 = 8 \text{ MHz}$

; Setup T2 clock source and divider

MOVLW	00000 <b>101</b> b	; T2CKS(15h.3~2) = 1, T2 clock source is Fsys/128
MOVWX	T2CTL	; T2PSC(15h.1~0) = 1, divided by 16384
BSX	T2CLR	; T2CLR = 1, clear T2 counter

; Enable T2 interrupt function

MOVLW	<b>10</b> 111111b	; Clear T2 request interrupt flag
MOVWX	INTIF	; Enable T2 interrupt function
BSX	T2IE	; T2CLR = 0, Enable T2 counting
BCX	T2CLR	

T2 clock source is  $F_{sys} / 128 = 8 \text{ MHz} / 128 = 62500 \text{ Hz}$ , T2PSC = 16384

T2 frequency =  $62500 \text{ Hz} / 16384 = 3.815 \text{ Hz}$

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.6 **T2IE:** T2 interrupt enable  
0: disable  
1: enable

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Ch.6 **T2IF:** T2 interrupt event pending flag  
This bit is set by H/W while T2 overflows, write 0 to this bit will clear this flag

0Fh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CLKCTL	SCKTYP	FCKTYPE	—	SLOWSTP	FASTSTP	CPUCKS	CPUPSC	
R/W	R/W	R/W	—	R/W	R/W	R/W	R/W	R/W
Reset	0	0	—	0	1	0	1	1

0Fh.4 **SLOWSTP:** Stop Slow-clock after execute SLEEP instruction  
0: Slow-clock keeps running after execute SLEEP instruction  
1: Slow-clock stops running after execute SLEEP instruction

15h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
T2CTL	—	—	—	T2CLR	T2CKS		T2PSC	
R/W	—	—	—	R/W	R/W		R/W	
Reset	—	—	—	0	0	0	0	0

15h.4 **T2CLR:** Clear and stop T2  
0: T2 runs  
1: T2 clear and stops

15h.3~2 **T2CKS:** T2 clock source selection  
00: Slow-clock  
01: Fsys/128  
1x: FIRC/512 (16 MHz/512)

15h.1~0 **T2PSC:** T2 prescaler. T2 clock source divided by  
00: 32768  
01: 16384  
10: 8192  
11: 128




There are six PWMs in this chip. PWM0~PWM5 have independent 16-bit duty control register, and share a set of 16-bit period register. The PWM can generate varies frequency waveform with 65536 duty resolution on the basis of the PWM clock. The PWM clock can select Fsys, FIRC (16 MHz), or FIRC\*2 (32 MHz) as its clock source. The following takes PWM0 as an example for description.

If PWMEN is cleared, the PWM0~5 will be cleared and stopped, otherwise the PWM0~5 remain running. The PWM0 structure is shown as follow. The PWM0 duty cycle can be changed by writing to PWM0DH and PWM0DL. The PWM0 output signal resets to a low level whenever the 16-bit base counter matches the 16-bit PWM0 duty register {PWM0DH, PWM0DL}. The PWM0 period can be set by writing the period value to the PWMPRDH and PWMPRDL registers. After writing the PWM0DH or PWMPRDH register, H/W will update PWM period and duty immediately. PWM0~5 share an interrupt flag, and an interrupt flag is generated at the end of the period.

DS-TM56M1522/22B/22C/22L/21H E

Only PWM0 can be output via PWM0P and PWM0N with four different modes. The edges of the PWM pulse can be separated with 16 different time non-overlap clocks intervals (Tnov). The width of Tnov can be selected by PWM0DZ (89h.3~0) within 0~15 PWM clock. The default output form is Mode0. The waveforms of the four output modes are shown below.

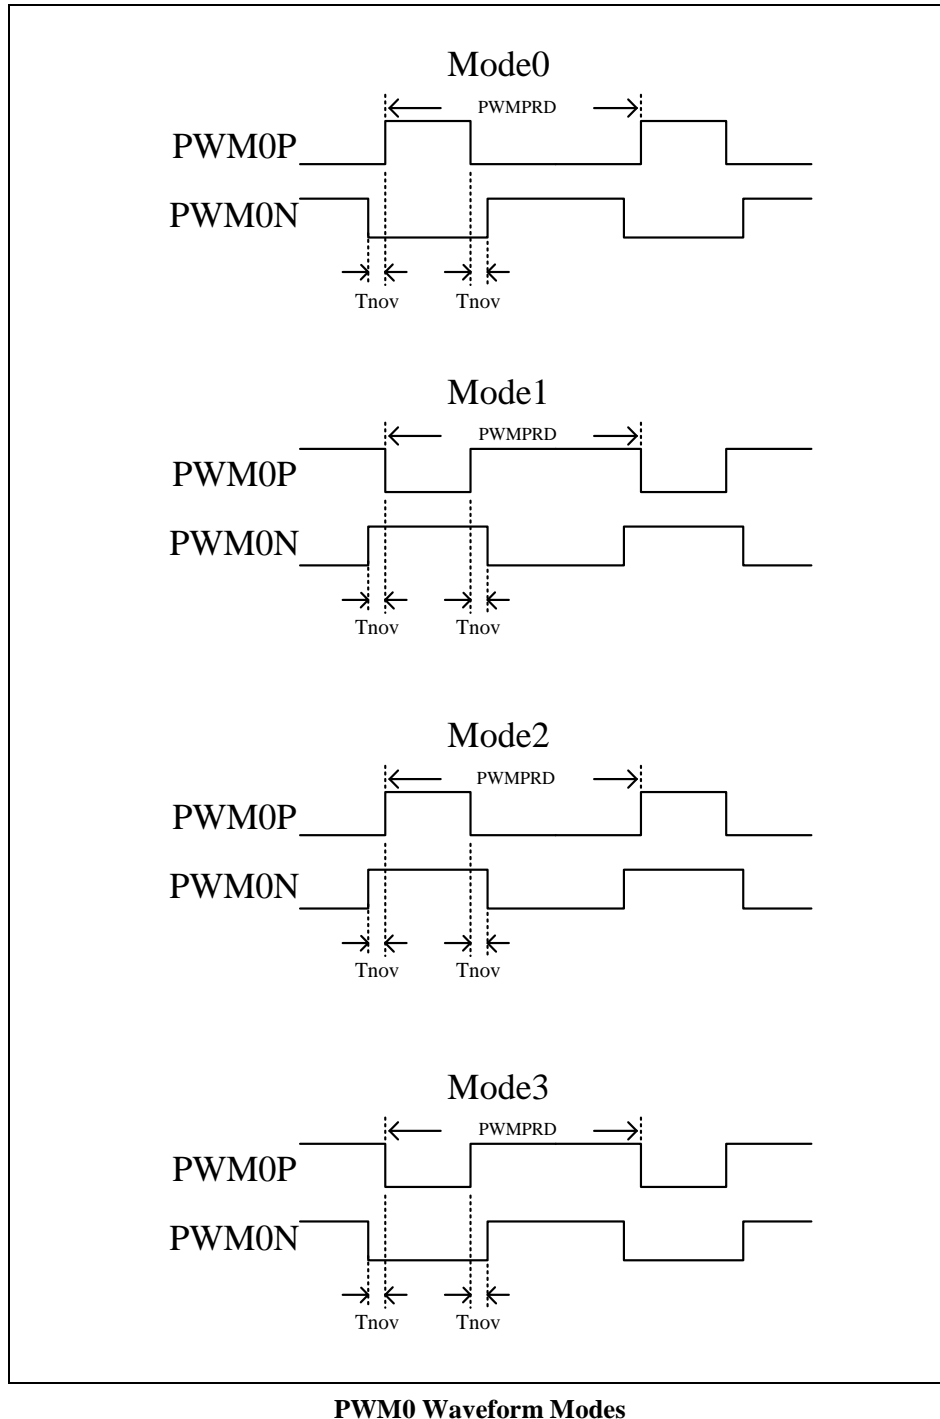



◇ Example:

; Setup Pin mode

```
MOVLW    xxxx0111b    ;
MOVWX    PAMOD54      ; PA4 Pin as PWM0P
```

```
MOVLW    xxxx0111b    ;
MOVWX    PAMOD76      ; PA6 Pin as PWM0N
```

; Setup PWM0 clock source select

```
MOVLW    xx10xxxxb    ;
MOVWX    OPTION2      ; FIRC 16 MHz as PWM clock source
```

; Setup PWM0 period and duty setting

```
MOVLW    FFh
MOVWX    PWMPRDL      ; write sequence: PWMPRDL then PWMPRDH
MOVLW    7Fh
MOVWX    PWMPRDH      ; Set PWM period = 7FFFh
```

```
MOVLW    00h
MOVWX    PWM0DL      ; write sequence: PWM0DL then PWM0DH
MOVLW    40h
MOVWX    PWM0DH      ; Set PWM0 duty = 4000h
```

; Setup PWM0 enable and dead zone control

```
MOVLW    10000000b    ; 89h.7 = 1, PWM0 enable
MOVWX    PWMCTL      ; 89h.5~4 = 0, PWM0 Mode0 output
                        ; 89h.3~0 = 0, PWM0 dead zone output disable
```

Example:

PWM0 clock source = FIRC 16 MHz, PWM period = 7FFFh, PWM duty = 4000h

PWM0 output frequency = 16 MHz / (period+1) = 16 MHz / 32768 = 488 Hz.

PWM0 output duty = duty / (period+1) = 50 %.

0Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE1	—	—	—	CMPIE	—	—	PWMIE	LVDIE
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Dh.1 **PWMIE:** PWM interrupt enable  
 0: disable  
 1: enable

0Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF1	—	—	—	CMPIF	—	—	PWMIF	LVDIF
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Eh.1 **PWMIF:** PWM interrupt event pending flag  
 This bit is set by H/W after PWM period counter roll over, write 0 to this bit will clear this flag

89h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWMCTL	PWMEN	—	PWM0OM		PWM0DZ			
R/W	R/W	—	R/W		R/W			
Reset	0	—	0	0	0	0	0	0

89h.7 **PWMEN:** PWM0~5 enable  
 0: disable  
 1: enable

89h.5~4 **PWM0OM:** PWM0 output mode select  
 00: Mode0  
 01: Mode1  
 10: Mode2  
 11: Mode3

89h.3~0 **PWM0DZ:** PWM0 non-overlap control  
 0000: no non-overlap  
 0001: non-overlap width are 1 PWM clock cycle  
 0010: non-overlap width are 2 PWM clock cycles  
 ...  
 1111: non-overlap width are 15 PWM clock cycles

91h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
OPTION2	—	—	PWMCKS		—	INT2SEL	INT1SEL	INT0SEL
R/W	—	—	R/W		—	R/W	R/W	R/W
Reset	—	—	0	0	—	0	0	0

91h.5~4 **PWMCKS:** PWM clock source select  
 00: Fsys  
 01: Fsys  
 10: FIRC (16 MHz)  
 11: FIRC x 2 (32 MHz). Refer to the graph of minimal operating voltage for PWMCKS=FIRC x 2.

92h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWMPRDH	PWMPRDH							
R/W	R/W							
Reset	1	1	1	1	1	1	1	1

92h.7~0 **PWMPRDH**: PWM0~5 period high byte  
 write sequence: PWMPRDL then PWMPRDH  
 read sequence: PWMPRDH then PWMPRDL

93h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWMPRDL	PWMPRDL							
R/W	R/W							
Reset	1	1	1	1	1	1	1	1

93h.7~0 **PWMPRDL**: PWM0~5 period low byte  
 write sequence: PWMPRDL then PWMPRDH  
 read sequence: PWMPRDH then PWMPRDL

94h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM0DH	PWM0DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

94h.7~0 **PWM0DH**: PWM0 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

95h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM0DL	PWM0DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

95h.7~0 **PWM0DL**: PWM0 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

96h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM1DH	PWM1DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

96h.7~0 **PWM1DH**: PWM1 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

97h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM1DL	PWM1DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

97h.7~0 **PWM1DL**: PWM1 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

98h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM2DH	PWM2DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

98h.7~0 **PWM2DH:** PWM2 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

99h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM2DL	PWM2DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

99h.7~0 **PWM2DL:** PWM2 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

9Ah	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM3DH	PWM3DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

9Ah.7~0 **PWM3DH:** PWM3 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

9Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM3DL	PWM3DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

9Bh.7~0 **PWM3DL:** PWM3 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

9Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM4DH	PWM4DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

9Ch.7~0 **PWM4DH:** PWM4 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

9Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM4DL	PWM4DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

9Dh.7~0 **PWM4DL:** PWM4 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL


9Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM5DH	PWM5DH							
R/W	R/W							
Reset	1	0	0	0	0	0	0	0

9Eh.7~0 **PWM5DH:** PWM5 duty high byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL


9Fh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PWM5DL	PWM5DL							
R/W	R/W							
Reset	0	0	0	0	0	0	0	0

9Fh.7~0 **PWM5DL:** PWM5 duty low byte  
 write sequence: PWMxDL then PWMxDH  
 read sequence: PWMxDH then PWMxDL

## 6.6 Analog-to-Digital Converter

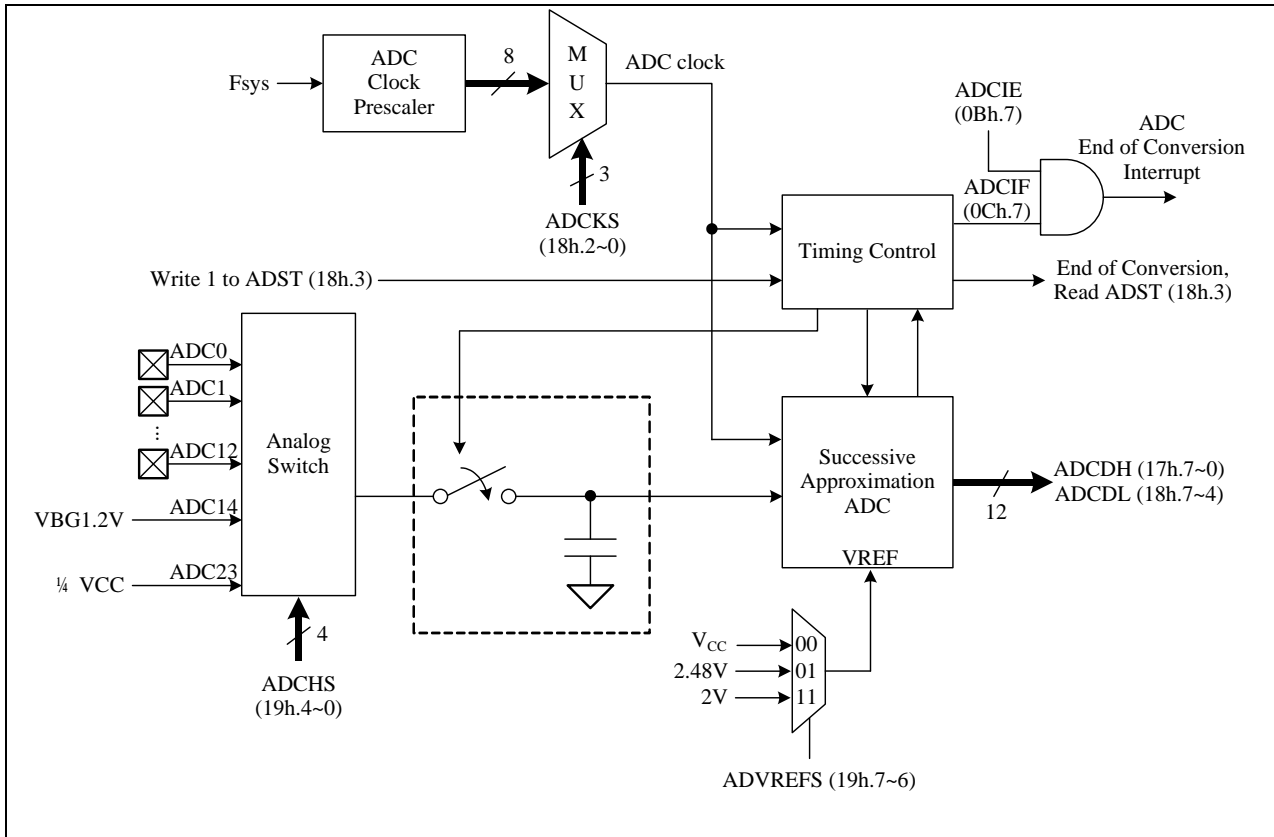

The 12-bit ADC (Analog to Digital Converter) consists of a 15-channel analog input multiplexer, control register, clock generator, 12-bit successive approximation register, and output data register. To use the ADC, user needs to set ADCKS (18h.2~0) to choose a proper ADC clock frequency, which must be less than 1 MHz. User then launches the ADC conversion by setting the ADST (18h.3) control bit. After end of conversion, H/W automatic clears the ADST (18h.3) bit. User can poll this bit to know the conversion status. When the IO pin is used as the ADC input pin, the corresponding pin mode should be set to 0011b. User needs to set ADCHS (19h.4~0) to choose the input channel of ADC. Besides, there are some reference input channel can be selected, ADC14 is VBG and ADC23 is 1/4VCC for ADC. ADC reference voltage can be configured as  $V_{CC}$  or  $V_{BG}$  by ADVREFS (19h.7~6), furthermore, if change to ADVREFS=01b or 11b, it will need 200uS warm-up stable time.

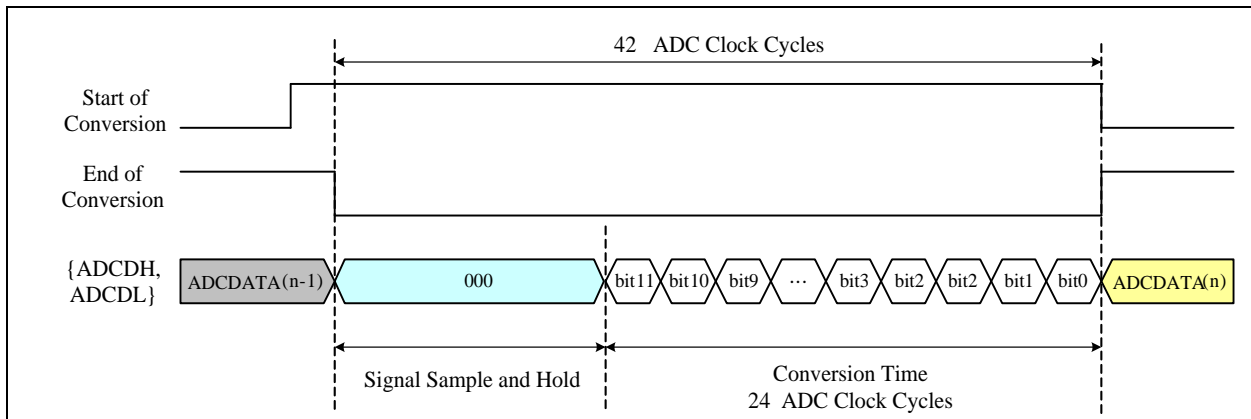

Example:

[CPU running at FAST mode , Fsys = FIRC 16 MHz ]  
ADC clock frequency = 1 MHz, ADC channel = ADC2 (PA2).

◇ Example:

```

MOV LW    xxxx0011b          ; ADC2 (PA2) as ADC input
MOV WX    PAMOD32

MOV LW    00000100b          ; ADCKS = Fsys/16, ADC clock = 1 MHz
MOV WX    ADCTL

MOV LW    00x00010b          ; ADC reference voltage select VCC
MOV WX    ADCTL2              ; ADC input channel select ADC2

BSX       ADST                 ; 18h.3 (ADST), ADC start conversion.

```

WAIT\_ADC:

```

BTXSC     ADST                 ; Wait ADC conversion finish.
LGOTO     WAIT_ADC

MOVXW     ADCDH                ; Read ADC output data bit 11~4
MOVXW     ADCTL                ; Read ADC output data bit 3~0
...

```

0Bh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE	ADCIE	T2IE	TM1IE	TM0IE	WKTIE	INT2IE	INT1IE	INT0IE
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Bh.7    **ADCIE:** ADC interrupt enable  
0: disable  
1: enable

0Ch	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF	ADCIF	T2IF	TM1IF	TM0IF	WKTIF	INT2IF	INT1IF	INT0IF
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Reset	0	0	0	0	0	0	0	0

0Ch.7    **ADCIF:** ADC interrupt event pending flag  
This bit is set by H/W after ADC end of conversion, write 0 to this bit will clear this flag

17h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ADCDH	ADCDH							
R/W	R							
Reset	—	—	—	—	—	—	—	—

17h.7~0    **ADCDH:** ADC output data bit 11~4

18h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ADCTL	ADCDL				ADST	ADCKS		
R/W	R				R/W	R/W		
Reset	—	—	—	—	0	0	0	0

18h.7~4 **ADCDL**: ADC output data bit 3~0

18h.3 **ADST**: ADC start bit.

0: H/W clear after end of conversion

1: ADC start conversion

18h.2~0 **ADCKS**: ADC clock frequency selection:

000: Fsys/256    100: Fsys/16

001: Fsys/128    101: Fsys/8

010: Fsys/64    110: Fsys/4

011: Fsys/32    111: Fsys/2

19h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ADCTL2	ADVREFS		—	ADCHS				
R/W	R/W		—	R/W				
Reset	0	0	—	1	1	1	1	1

19h.7~6 **ADVREFS**: ADC reference voltage and  $V_{BG}$  output voltage select

00: ADC reference voltage is  $V_{CC}$ ,  $V_{BG}$  is 1.20V

01: ADC reference voltage is  $V_{BG}$ ,  $V_{BG}$  is 2.48V

10: Reserved

11: ADC reference voltage is  $V_{BG}$ ,  $V_{BG}$  is 2.00V(This feature can't not be emulated)(Don't use for the selection of DAC's VREF)

19h.4~0 **ADCHS**: ADC channel select

00000: ADC0 (PA0)    01000: ADC8 (PB1)

00001: ADC1 (PA1)    01001: ADC9 (PB2)

00010: ADC2 (PA2)    01010: ADC10 (PB4)

00011: ADC3 (PA3)    01011: ADC11 (PB5)

00100: ADC4 (PA4)    01100: ADC12 (PB6)

00101: ADC5 (PA5)    01110: VBG

00110: ADC6 (PA6)    10111: 1/4 VCC


00111: ADC7 (PB0)    others: Reserved



## 6.7 Comparator

There is a Comparator (CMP) in this device.

The CMP built in a 7-bit DAC module, which output can be accessed to negative input port of the CMP. Reference Voltage of DAC can be selected as  $V_{CC}$  or  $V_{BG}$  by setting SVRF (18Fh.7).  $V_{BG}$  will be configured as 1.20V or 2.48V by setting ADVREFS (19h.7~6). A suitable level of voltage can be selected for proper operation of user application by setting SVL (18Fh.6~0), which will change the resistance to transform the value of voltage. Setting the PDCMP=1 (18Dh.7) will let DAC and CMP enter power down mode. By configuring SCMPN (18Eh.7), negative port input source will be external pin input or DAC output. And positive port input source is external pin input. The SCIN (18Eh.6~4) and SCIP (18Eh.2~0) register determine negative and positive port external input source respectively. Because the input module of the CMP is composed of PMOS, the input voltage range will be affected by  $V_{th}$  of the PMOS. Thus, the maximum input voltage of the CMP will be  $(V_{CC}-0.5)$  V. Meanwhile, the Comparator's hysteresis voltage is about 30mV. The Comparator original output (CMPOX) can be read by CMPOX (18Dh.6) bit. The Chip provides a de-bounce module to de-bounce the CMPOX signal, user can select de-bounce time by CMPDBS (18Dh.1~0). The de-bounce output signal can select invert or not by CMPINV (18Dh.4) to generate CMPO signal. The CMPO can be output to pin (PA5) by set CMPOE (18Dh.5) and the PA5MOD should be set to xx10b. The CMPO is also a trigger source for the interrupt trigger module to generate interrupt flag CMPIF (0Eh.4). The trigger mode is selected by CMPTRIG (18Dh.3~2). When Comparator power down, the interrupt flag will still be produced. Therefore, it is necessary to clear the interrupt flag first after turning on the CMP module each time to prevent using the dummy flag.

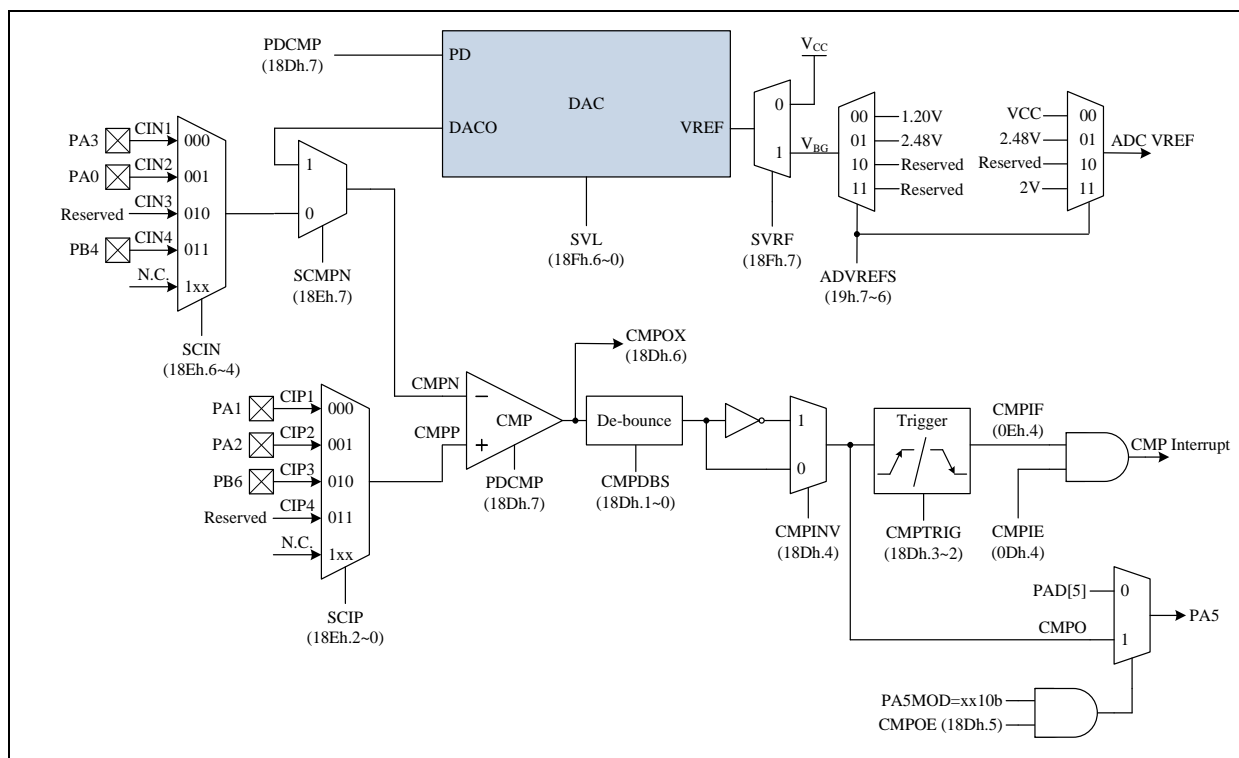

0Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIE1	—	—	—	CMPIE	—	—	PWMIE	LVDIE
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Dh.4 **CMPIE:** Comparator interrupt enable  
0: disable  
1: enable

0Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
INTIF1	—	—	—	CMPIF	—	—	PWMIF	LVDIF
R/W	—	—	—	R/W	—	—	R/W	R/W
Reset	—	—	—	0	—	—	0	0

0Eh.4 **CMPIF:** Comparator interrupt event pending flag

This bit is set by H/W while CMPO match trigger condition, write 0 to this bit will clear this flag

19h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ADCTL2	ADVREFS		—	ADCHS				
R/W	R/W		—	R/W				
Reset	0	0	—	1	1	1	1	1

19h.7~6 **ADVREFS:** ADC reference voltage and  $V_{BG}$  output voltage select

00: ADC reference voltage is  $V_{CC}$ ,  $V_{BG}$  is 1.20V

01: ADC reference voltage is  $V_{BG}$ ,  $V_{BG}$  is 2.48V

10: Reserved

11: ADC reference voltage is  $V_{BG}$ ,  $V_{BG}$  is 2V(This feature can't not be emulated) (Don't use for the selection of DAC's VREF)

18Dh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CMPCTL	PDCMP	CMPOX	CMPOE	CMPINV	CMPTRIG		CMPDBS	
R/W	R/W	R	R/W	R/W	R/W		R/W	
Reset	1	1	0	0	0	0	0	0

18Dh.7 **PDCMP:** Comparator & DAC power down enable control

0: disable Comparator & DAC power down

1: enable Comparator & DAC power down

18Dh.6 **CMPOX:** Comparator original output (CMPOX) status

0:  $V_{CMPN} < V_{CMPN}$

1:  $V_{CMPN} > V_{CMPN}$  or PDCMP =1

18Dh.5 **CMPOE:** Comparator output (CMPO) signal output to PA5

0: disable

1: enable, PA5MOD should be set to xx10b

18Dh.4 **CMPINV:** Comparator de-bounce output invert select

0: no invert

1: invert

18Dh.3~2 **CMPTRIG:** Comparator interrupt trigger mode

00: Rising edge

01: Falling edge

10: Both edge

11: High level

18Dh.1~0 **CMPDBS:** Comparator original output (CMPOX) de-bounce time

00: none

01: 4 Fsys

10: 8 Fsys

11: 16 Fsys

18Eh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CMP PNS	SCMPN	SCIN			—	SCIP		
R/W	R/W	R/W			—	R/W		
Reset	1	1	1	1	—	1	1	1

18Eh.7 **SCMPN:** Comparator CMPN source select

0: Comparator CMPN source is external input (CINx)


- 1: Comparator CMPN source is DAC output
- 18Eh.6~4 **SCIN:** Comparator CMPN external input select
- 000: Comparator CMPN external input is CIN1 (PA3)
- 001: Comparator CMPN external input is CIN2 (PA0)
- 010: Reserved
- 011: Comparator CMPN external input is CIN4 (PB4)
- 1xx: No connect
- 18Eh.3 This bit must be set as 1 in emulation
- 18Eh.2~0 **SCIP:** Comparator CMPP external input select
- 000: Comparator CMPP external input is CIP1 (PA1)
- 001: Comparator CMPP external input is CIP2 (PA2)
- 010: Comparator CMPP external input is CIP3 (PB6)
- 011: Reserved
- 1xx: No connect

18Fh	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
DACTL	SVRF	SVL						
R/W	R/W	R/W						
Reset	0	0	0	0	0	0	0	0

- 18Fh.7 **SVRF:** DAC reference voltage select
- 0:  $V_{CC}$
- 1:  $V_{BG}$  (voltage level is selected by ADVREFS)
- 18Fh.6~0 **SVL:** DAC output voltage select (reference source can be selected as  $V_{CC}$  or  $V_{BG}$ )
- 000\_0000: 0/128 \* reference source
- 000\_0001: 1/128 \* reference source
- ...
- 111\_1110: 126/128 \* reference source
- 111\_1111: 127/128 \* reference source

## 6.8 Cyclic Redundancy Check (CRC)

The chip supports an integrated 16-bit Cyclic Redundancy Check function. The Cyclic Redundancy Check (CRC) calculation unit is an error detection technique test algorithm and uses to verify data transmission or storage data correctness. The CRC calculation takes an 8-bit data stream or a block of data as input and generates a 16-bit output remainder. The data stream is calculated by the same generator polynomial.

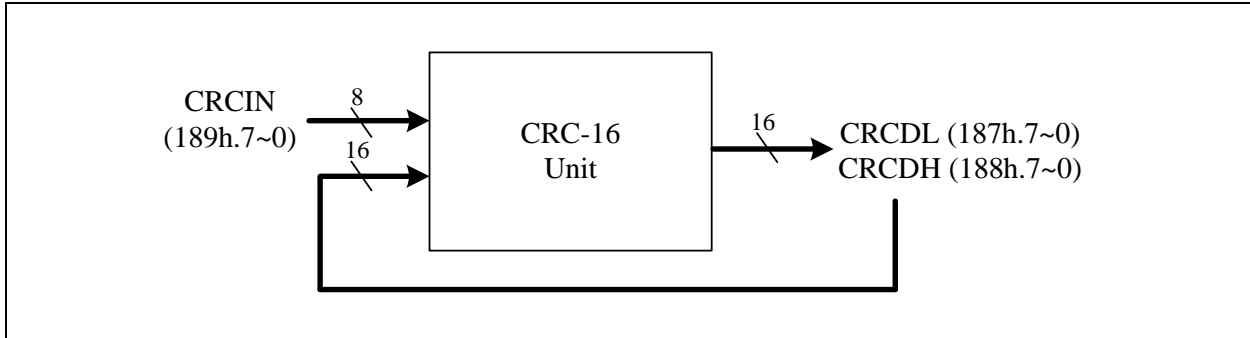

**CRC16 Block Diagram**

The CRC generator provides the 16-bit CRC result calculation based on the CRC-16-IBM polynomial. In this CRC generator, there is only one polynomial available for the numeric values calculation. It can't support the 16-bit CRC calculations based on any other polynomials. Each write operation to the CRCIN register creates a combination of the previous CRC value stored in the CRCDH and CRCDL registers. It will take one MCU instruction cycle to calculate.

**CRC-16-IBM (Modbus) Polynomial representation:  $X^{16} + X^{15} + X^2 + 1$**

187h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CRCDL	CRCDL							
R/W	R/W							
Reset	1	1	1	1	1	1	1	1

187h.7~0 **CRCDL**: 16-bit CRC checksum data bit 7~0

188h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CRCDH	CRCDH							
R/W	R/W							
Reset	1	1	1	1	1	1	1	1

188h.7~0 **CRCDH**: 16-bit CRC checksum data bit 15~8

189h	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CRCIN	CRCIN							
W	W							
Reset	—	—	—	—	—	—	—	—

189h.7~0 **CRCIN**: CRC data input, write this register to start CRC calculation

## MEMORY MAP

Name	Address	R/W	Rst	Description
<b>INDF (00h/80h/100h/180h)</b>				<b>Function related to: RAM W/R</b>
INDF	00.7~0	R/W	-	Not a physical register, addressing INDF actually point to the register whose address is contained in the FSR register
<b>TM0 (01h/101h)</b>				<b>Function related to: Timer0</b>
TM0	01.7~0	R/W	00	Timer0 content
<b>PCL (02h/82h/102h/182h)</b>				<b>Function related to: PROGRAM COUNT</b>
PCL	02.7~0	R/W	00	Programming Counter data bit 7~0
<b>STATUS (03h/83h/103h/183h)</b>				<b>Function related to: STATUS</b>
IRP	03.7	R/W	0	Register Bank Select bit (used for indirect addressing)
RP1	03.6	R/W	0	Register Bank Select bit 1 for direct addressing
RP0	03.5	R/W	0	Register Bank Select bit 0 for direct addressing
TO	03.4	R	0	WDT timeout flag, cleared by PWRST, ‘SLEEP’ or ‘CLRWDI’ instruction
PD	03.3	R	0	Power down flag, set by ‘SLEEP’, cleared by ‘CLRWDI’ instruction
Z	03.2	R/W	0	Zero flag
DC	03.1	R/W	0	Decimal Carry flag
C	03.0	R/W	0	Carry flag
<b>FSR (04h/84h/104h/184h)</b>				<b>Function related to: RAM W/R</b>
FSR	04.7~0	R/W	-	File Select Register, indirect address mode pointer
<b>PAD (05h)</b>				<b>Function related to: Port A</b>
PAD	05.7~0	R	-	Port A pin or “data register” state
		W	FF	Port A output data register
<b>PBD (06h)</b>				<b>Function related to: Port B</b>
PBD	06.6~4	R	-	Port B pin or “data register” state
		W	7	Port B output data register
	06.2~0	R	-	Port B pin or “data register” state
		W	7	Port B output data register
<b>PCLATH (0Ah/8Ah/10Ah/18Ah)</b>				<b>Function related to: PROGRAM COUNT</b>
GPR	0A.7~4	R/W	0	General Purpose Register
PCLATH	0A.3~0	R/W	0	Write Buffer for the high byte of the Program Counter
<b>INTIE (0Bh/8Bh/10Bh/18Bh)</b>				<b>Function related to: Interrupt Enable</b>
ADCIE	0B.7	R/W	0	ADC interrupt enable 0: disable 1: enable
T2IE	0B.6	R/W	0	T2 interrupt enable 0: disable 1: enable
TM1IE	0B.5	R/W	0	Timer1 interrupt enable 0: disable 1: enable
TM0IE	0B.4	R/W	0	Timer0 interrupt enable 0: disable 1: enable
WKTIE	0B.3	R/W	0	Wakeup Timer interrupt enable and Wakeup Timer enable 0: disable 1: enable
INT2IE	0B.2	R/W	0	INT2 pin (PA7 or PB5) interrupt enable 0: disable 1: enable
INT1IE	0B.1	R/W	0	INT1 pin (PA1 or PB1) interrupt enable 0: disable 1: enable

Name	Address	R/W	Rst	Description
INT0IE	0B.0	R/W	0	INT0 pin (PA3 or PB2) interrupt enable 0: disable 1: enable
INTIF (0Ch)				Function related to: Interrupt Flag
ADCIF	0C.7	R	-	ADC interrupt flag, set by H/W after ADC end of conversion
		W	0	write 0: clear this flag; write 1: no action
T2IF	0C.6	R	-	T2 interrupt event pending flag, set by H/W while T2 overflows
		W	0	write 0: clear this flag; write 1: no action
TM1IF	0C.5	R	-	Timer1 interrupt event pending flag, set by H/W while Timer1 overflows
		W	0	write 0: clear this flag; write 1: no action
TM0IF	0C.4	R	-	Timer0 interrupt event pending flag, set by H/W while Timer0 overflows
		W	0	write 0: clear this flag; write 1: no action
WKTIF	0C.3	R	-	WKT interrupt event pending flag, set by H/W while WKT time out
		W	0	write 0: clear this flag; write 1: no action
INT2IF	0C.2	R	-	INT2 (PA7 or PB5) interrupt event pending flag, set by H/W at INT2 pin's falling edge
		W	0	write 0: clear this flag; write 1: no action
INT1IF	0C.1	R	-	INT1 (PA1 or PB1) interrupt event pending flag, set by H/W at INT1 pin's falling/rising edge
		W	0	write 0: clear this flag; write 1: no action
INT0IF	0C.0	R	-	INT0 (PA3 or PB2) interrupt event pending flag, set by H/W at INT0 pin's falling/rising edge
		W	0	write 0: clear this flag; write 1: no action
INTIE1 (0Dh)				Function related to: Interrupt Enable
CMPIE	0D.4	R/W	0	Comparator interrupt enable 0: disable 1: enable
PWMIE	0D.1	R/W	0	PWM interrupt enable 0: disable 1: enable
LVDIE	0D.0	R/W	0	LVD interrupt enable 0: disable 1: enable
INTIF1 (0Eh)				Function related to: Interrupt Flag
CMPIF	0E.4	R	-	Comparator interrupt event pending flag, set by H/W while CMPO match trigger condition
		W	0	write 0: clear this flag; write 1: no action
PWMIF	0E.1	R	-	PWM interrupt event pending flag, set by H/W after PWM period counter roll over
		W	0	write 0: clear this flag; write 1: no action
LVDIF	0E.0	R	-	LVD interrupt event pending flag, set by H/W while $V_{CC} < V_{LVD}$
		W	0	write 0: clear this flag; write 1: no action
CLKCTL (0Fh)				Function related to: Fsys
SCKTYPE	0F.7	R/W	0	Slow Clock Type 0: SIRC 1: SXT
FCKTYPE	0F.6	R/W	0	Fast Clock Type 0: FIRC 1: FXT
SLOWSTP	0F.4	R/W	0	Stop Slow-clock after execute SLEEP instruction 0: Slow-clock keeps running after execute SLEEP instruction 1: Slow-clock stop running after execute SLEEP instruction
FASTSTP	0F.3	R/W	1	Stop Fast-clock 0: Fast-clock is running 1: Fast-clock stops running

Name	Address	R/W	Rst	Description
CPUCKS	0F.2	R/W	0	System clock source select 0: Slow-clock 1: Fast-clock
CPUPSC	0F.1~0	R/W	11	System clock source prescaler. System clock source 00: div 8 01: div 4 10: div 2 11: div 1
<b>TM0RLD (10h)</b>				<b>Function related to: Timer0</b>
TM0RLD	10.7~0	R/W	00	Timer0 reload data
<b>TM0CTL (11h)</b>				<b>Function related to: Timer0</b>
TM0STP	11.6	R/W	0	Stop Timer0 0: Timer0 runs 1: Timer0 stops
TM0EDG	11.5	R/W	0	TM0CKI (PA2) edge 0: rising edge 1: falling edge
TM0CKS	11.4	R/W	0	Timer0 prescaler clock source 0: Fsys/2 1: TM0CKI (PA2)
TM0PSC	11.3~0	R/W	0	Timer0 prescaler. Timer0 prescaler clock source divided by 0000: 1      0011: 8      0110: 64 0001: 2      0100: 16      0111: 128 0010: 4      0101: 32      1xxx: 256
<b>TM1 (12h)</b>				<b>Function related to: Timer1</b>
TM1	12.7~0	R/W	00	Timer1 content
<b>TM1RLD (13h)</b>				<b>Function related to: Timer1</b>
TM1RLD	13.7~0	R/W	00	Timer1 reload data
<b>TM1CTL (14h)</b>				<b>Function related to: Timer1</b>
TM1STP	14.6	R/W	0	Stop Timer1 0: Timer1 runs 1: Timer1 stops
TM1PSC	14.3~0	R/W	0	Timer1 prescaler. Timer1 clock source (Fsys/2) divided by 0000: 1      0011: 8      0110: 64 0001: 2      0100: 16      0111: 128 0010: 4      0101: 32      1xxx: 256
<b>T2CTL (15h)</b>				<b>Function related to: T2</b>
T2CLR	15.4	R/W	0	Clear and stop T2 0: T2 runs 1: T2 clear and stops
T2CKS	15.3~2	R/W	0	T2 clock source selection 00: Slow-clock 11: Fsys/128 1x: FIRC/512 (16 MHz/512)
T2PSC	15.1~0	R/W	0	T2 prescaler. T2 clock source divided by 00: 32768 01: 16384 10: 8192 11: 128
<b>LVCTL (16h)</b>				<b>Function related to: LVD/LVR</b>
LVDF	16.7	R	0	Low voltage detection flag 0: $V_{CC} > V_{LVD}$ 1: $V_{CC} < V_{LVD}$
LVDHYS	16.6	R/W	1	LVD Hysteresis 0: disable 1: enable
LVRSAV	16.5	R/W	1	POR/LVR auto power off in STOP/IDLE mode
LVDSAV	16.4	R/W	1	LVD auto power off in STOP/IDLE mode

Name	Address	R/W	Rst	Description
LVDS	16.3~0	R/W	0	LVD voltage ( $V_{LVD}$ ) select(TM56M1522/21H) 0000: Disable   0100 : 2.60V   1000: 3.15V   1100: 3.70V 0001: 2.20V   0101: 2.75V   1001: 3.30V   1101: 3.85V 0010: 2.30V   0110: 2.90V   1010: 3.45V   1110: 4.00V 0011: 2.45V   0111: 3.00V   1011: 3.60V   1111: 4.15V LVD voltage ( $V_{LVD}$ ) select(TM56M1522B/22C/22L) 0000: Disable   0100 : 2.35V   1000: 2.89V   1100: 3.45V 0001: 1.93V   0101: 2.48V   1001: 3.03V   1101: 3.59V 0010: 2.06V   0110: 2.62V   1010: 3.16V   1110: 3.73V 0011: 2.19V   0111: 2.76V   1011: 3.30V   1111: 3.87V
<b>ADCDH (17h)</b>				<b>Function related to: ADC</b>
ADCDH	17.7~0	R	-	ADC output data bit 11~4
<b>ADCTL (18h)</b>				<b>Function related to: ADC</b>
ADCDL	18.7~4	R	-	ADC output data bit 3~0
ADST	18.3	R/W	0	ADC start bit. 0: H/W clear after end of conversion 1: ADC start conversion
ADCKS	18.2~0	R/W	0	ADC clock frequency selection. 1MHz(Typ.) 000: Fsys/256   010: Fsys/64   100: Fsys/16   110: Fsys/4 001: Fsys/128   011: Fsys/32   101: Fsys/8   111: Fsys/2
<b>ADCTL2 (19h)</b>				<b>Function related to: ADC</b>
ADVREFS	19.7~6	R/W	00	ADC reference voltage and $V_{BG}$ output voltage select 00: ADC reference voltage is $V_{CC}$ , $V_{BG}$ is 1.20V 01: ADC reference voltage is $V_{BG}$ , $V_{BG}$ is 2.48V 10: Reserved 11: ADC reference voltage is $V_{BG}$ , $V_{BG}$ is 2.00V(This feature can't not be emulated) (Don't use for the selection of DAC's VREF)
ADCHS	19.4~0	R/W	1F	ADC channel select 00000: ADC0 (PA0)   01000: ADC8 (PB1) 00001: ADC1 (PA1)   01001: ADC9 (PB2) 00010: ADC2 (PA2)   01010: ADC10 (PB4) 00011: ADC3 (PA3)   01011: ADC11 (PB5) 00100: ADC4 (PA4)   01100: ADC12 (PB6) 00101: ADC5 (PA5)   01110: VBG 00110: ADC6 (PA6)   10111: 1/4 VCC 00111: ADC7 (PB0)   others: Reserved
<b>User Data Memory</b>				
RAM	20~6F	R/W	-	RAM Bank0 area (80 Bytes)
RAM	70~7F	R/W	-	RAM common area (16 Bytes)
<b>OPTION (81h/181h)</b>				<b>Function related to: STATUS/INT0/INT1/WDT/WKT</b>
HWAUTO	81.7	R/W	0	Enter/Exit interrupt subroutine, HW auto Save/Restore WREG, FSR, TABR, PCLATH, DPL, DPH, and STATUS w/o TO, PD 0:disable 1: enable
INT0EDG	81.6	R/W	0	INT0 pin interrupt edge selection 0: falling edge trigger 1: rising edge trigger
INT1EDG	81.5	R/W	0	INT1 pin interrupt edge selection 0: falling edge trigger 1: rising edge trigger
WDTPSC	81.3~2	R/W	3	WDT period selections: 00: 84ms   01: 168ms   10: 672ms   11: 1344ms @5V
WKT PSC	81.1~0	R/W	3	WKT period selections: 00: 10.5ms   01: 21ms   10: 42ms   11: 84ms @5V
<b>PAMOD10 (85h)</b>				<b>Function related to: Port A</b>



Name	Address	R/W	Rst	Description
PA1MOD	85.7~4	R/W	1	PA1 I/O mode control
PA0MOD	85.3~0	R/W	1	PA0 I/O mode control
<b>PAMOD32 (86h)</b>				<b>Function related to: Port A</b>
PA3MOD	86.7~4	R/W	1	PA3 I/O mode control
PA2MOD	86.3~0	R/W	1	PA2 I/O mode control
<b>PAMOD54 (87h)</b>				<b>Function related to: Port A</b>
PA5MOD	87.7~4	R/W	1	PA5 I/O mode control
PA4MOD	87.3~0	R/W	1	PA4 I/O mode control
<b>PAMOD76 (88h)</b>				<b>Function related to: Port A</b>
PA7MOD	88.7~4	R/W	0	PA7 I/O mode control PA7 has no high-sink, 1/2 bias and resistor pull-down capability.
PA6MOD	88.3~0	R/W	1	PA6 I/O mode control
<b>PWMCTL (89h)</b>				<b>Function related to: PWM0</b>
PWMEN	89.7	R/W	0	PWM Clock Enable 0: Disable 1: Enable
PWM0OM	89.5~4	R/W	0	PWM0 output mode 00: Mode0 01: Mode1 10: Mode2 11: Mode3
PWM0DZ	89.3~0	R/W	0	PWM0 non-overlap control 0000: no non-overlap 0001: non-overlap width are 1 PWM clock cycle 0010: non-overlap width are 2 PWM clock cycles ... 1111: non-overlap width are 15 PWM clock cycles
<b>PBMOD10 (8Ch)</b>				<b>Function related to: Port B</b>
PB1MOD	8C.7~4	R/W	1	PB1 I/O mode control
PB0MOD	8C.3~0	R/W	1	PB0 I/O mode control
<b>PBMOD32 (8Dh)</b>				<b>Function related to: Port B</b>
PB2MOD	8D.3~0	R/W	1	PB2 I/O mode control
<b>PBMOD54 (8Eh)</b>				<b>Function related to: Port B</b>
PB5MOD	8E.7~4	R/W	1	PB5 I/O mode control
PB4MOD	8E.3~0	R/W	1	PB4 I/O mode control
<b>PBMOD76 (8Fh)</b>				<b>Function related to: Port B</b>
PB6MOD	8F.3~0	R/W	1	PB6 I/O mode control
<b>OPTION2 (91h)</b>				<b>Function related to: PWM0/INT2/INT1/INT0</b>
PWMCKS	91.5~4	R/W	00	PWM Clock Source 0x: Fsys 10: FIRC (16 MHz) 11: FIRC*2 (32 MHz). Refer to the graph of minimal operating voltage for PWMCKS=FIRC x 2.
INT2SEL	91.2	R/W	0	INT2 pin select 0: PA7 1: PB5
INT1SEL	91.1	R/W	0	INT1 pin select 0: PA1 1: PB1
INT0SEL	91.0	R/W	0	INT0 pin select 0: PA3 1: PB2
<b>PWMPRDH (92h)</b>				<b>Function related to: PWM</b>
PWMPRDH	92.7~0	R/W	FF	PWM Period bit 15~8

Name	Address	R/W	Rst	Description
<b>PWMPRDL (93h)</b>				<b>Function related to: PWM</b>
PWMPRDL	93.7~0	R/W	FF	PWM Period bit 7~0
<b>PWM0DH (94h)</b>				<b>Function related to: PWM0</b>
PWM0DH	94.7~0	R/W	80	PWM0 Duty bit 15~8
<b>PWM0DL (95h)</b>				<b>Function related to: PWM0</b>
PWM0DL	95.7~0	R/W	00	PWM0 Duty bit 7~0
<b>PWM1DH (96h)</b>				<b>Function related to: PWM1</b>
PWM1DH	96.7~0	R/W	80	PWM1 Duty bit 15~8
<b>PWM1DL (97h)</b>				<b>Function related to: PWM1</b>
PWM1DL	97.7~0	R/W	00	PWM1 Duty bit 7~0
<b>PWM2DH (98h)</b>				<b>Function related to: PWM2</b>
PWM2DH	98.7~0	R/W	80	PWM2 Duty bit 15~8
<b>PWM2DL (99h)</b>				<b>Function related to: PWM2</b>
PWM2DL	99.7~0	R/W	00	PWM2 Duty bit 7~0
<b>PWM3DH (9Ah)</b>				<b>Function related to: PWM3</b>
PWM3DH	9A.7~0	R/W	80	PWM3 Duty bit 15~8
<b>PWM3DL (9Bh)</b>				<b>Function related to: PWM3</b>
PWM3DL	9B.7~0	R/W	00	PWM3 Duty bit 7~0
<b>PWM4DH (9Ch)</b>				<b>Function related to: PWM4</b>
PWM4DH	9C.7~0	R/W	80	PWM4 Duty bit 15~8
<b>PWM4DL (9Dh)</b>				<b>Function related to: PWM4</b>
PWM4DL	9D.7~0	R/W	00	PWM4 Duty bit 7~0
<b>PWM5DH (9Eh)</b>				<b>Function related to: PWM5</b>
PWM5DH	9E.7~0	R/W	80	PWM5 Duty bit 15~8
<b>PWM5DL (9Fh)</b>				<b>Function related to: PWM5</b>
PWM5DL	9F.7~0	R/W	00	PWM5 Duty bit 7~0
<b>User Data Memory</b>				
RAM	A0~EF	R/W	-	RAM Bank1 area (80 Bytes)
<b>PINMOD (105h)</b>				<b>Function related to: IO Port</b>
Reserved	105.5	R	x	read as unknown after reset
HSINK	105.2	R/W	1	All IO port high sink current enable 0: low sink current 1: high sink current. PA7 has no high-sink capability.
Reserved	105.1	R/W	0	must be kept at 0
Reserved	105.0	R/W	0	must be kept at 0
<b>LVRPD (109h)</b>				<b>Function related to: LVR/POR</b>
LVRPD	109.7~0	W	0	Write 37h to force LVR+POR Disable Write 38h to force LVR Disable, POR still enable Write 39h to force POR Disable, LVR still enable Write others LVR and POR enable
PORPDF	109.1	R	0	POR force power down flag 0: POR enable 1: POR is forced power down
LVRPDF	109.0	R	0	LVR force power down flag 0: LVR enable 1: LVR is forced power down
<b>PCH (10Ch)</b>				<b>Function related to: PCH</b>

Name	Address	R/W	Rst	Description
PCH	10C.7~0	W	00	Programming Counter high byte source selection when instruction with PCL as destination is executed write 0x1C to set PCH_S = 1: PCH keep the original value write others to clear PCH_S = 0: PCH is from PCLATH After reset, the PCH_S is cleared
PCH	10C.3~0	R	0	Program Counter data bit 11~8
<b>BGTRIM (10Eh)</b>				<b>Function related to: Bandgap</b>
BGTRIM	10E.4~0	R/W	CFG	VBG 1.2V trim value
<b>IRCF (10Fh)</b>				<b>Function related to: Internal RC</b>
IRCF	10F.6~0	R/W	CFG	FIRC trim value
<b>BG2TRIM (111h)</b>				<b>Function related to: Bandgap</b>
BG2TRIM	111.7~0	R	CFG	VBG 2V trim value. The users could move this register to BGTRIM for exact 2V VBG. This feature can't be emulated.
<b>LDOCCTL (112h)</b>				<b>Function related to: LDOC</b>
LDOCOUT	112.0	R/W	0	LDOC output control 0: LDOC not output to PA3 1: LDOC output to PA3 (PA3MOD should be set to 0011b)(This feature can't be emulated)
<b>RDCTL (113h)</b>				<b>Function related to: Program ROM</b>
RDCTL	113.1~0	R/W	00	Read signal delay control for Program ROM 00: 20ns delay for read signal of Program ROM 01: 16ns delay for read signal of Program ROM 10: 12ns delay for read signal of Program ROM 11: 8ns delay for read signal of Program ROM Change this register at slow clock for safety. <b>The user must switch this register to "8ns" to enhance the performance of minimal operating voltage.</b> This feature can't be emulated.
<b>IRCFT (114h)</b>				<b>Function related to: Internal RC</b>
IRCFT	114.4~0	R/W	00	FIRC frequency fine-tuning per trimming step(This feature can't be emulated)
<b>User Data Memory</b>				
RAM	120~16F	R/W	-	RAM Bank2 area (80 Bytes)
<b>DPL (185h)</b>				<b>Function related to: Table Read</b>
DPL	185.7~0	R/W	00	TBL Data Pointer bit 7~0
<b>DPH (186h)</b>				<b>Function related to: Table Read</b>
DPH	186.3~0	R/W	00	TBL Data Pointer bit 11~8
<b>CRCDL (187h)</b>				<b>Function related to: CRC16</b>
CRCDL	187.7~0	R/W	FF	16-bit CRC checksum data bit 7~0
<b>CRCDH (188h)</b>				<b>Function related to: CRC16</b>
CRCDH	188.7~0	R/W	FF	16-bit CRC checksum data bit 15~8
<b>CRCIN (189h)</b>				<b>Function related to: CRC16</b>
CRCIN	189.7~0	W	0	CRC data input, write this register to start CRC calculation
<b>TABR (18Ch)</b>				<b>Function related to: Table Read</b>

Name	Address	R/W	Rst	Description
TABR	18C.7~0	R/W	0	1. TABR write 01h = instruction TABRL (Read PROM low byte data to W and TABR) 2. TABR write 02h = instruction TABRH (Read PROM high byte data to W and TABR) 3. Don't write the value other than 01h or 02h into register TABR 4. After step.1 or step.2, read TABR to get main ROM table read value for C language <i>Table Read for ASM: Support instruction TABRL / TABRH or register TABR. Suggest not using the method of register TABR. SFR HWAUTO=1 is also suggested.</i> <i>Table Read for C: using register TABR. Only be used outside or inside the interrupt service routine. Don't utilize it inside and outside interrupt service routine simultaneously. Otherwise, something will be wrong.</i>
<b>CMPCCTL (18Dh)</b>			<b>Function related to: Comparator</b>	
PDCMP	18D.7	R/W	1	Comparator & DAC power down enable control 0: disable Comparator & DAC power down 1: enable Comparator & DAC power down
CMPOX	18D.6	R	1	Comparator original output (CMPOX) status 0: $V_{CMPN} < V_{CMPN}$ 1: $V_{CMPN} > V_{CMPN}$ or PDCMP = 1
CMPOE	18D.5	R/W	0	Comparator output (CMPO) signal output to PA5 0: disable 1: enable, PA5MOD should be set to xx10b
CMPIINV	18D.4	R/W	0	Comparator de-bounce output invert select 0: no invert 1: invert
CMPTRIG	18D.3~2	R/W	0	Comparator interrupt trigger mode 00: Rising edge 01: Falling edge 10: Both edge 11: High level
CMPDBS	18D.1~0	R/W	0	Comparator original output (CMPOX) de-bounce time 00: none 01: 4 Fsys 10: 8 Fsys 11: 16 Fsys
<b>CMPPNS (18Eh)</b>			<b>Function related to: Comparator/DAC</b>	
SCMPN	18E.7	R/W	1	Comparator CMPN source select 0: Comparator CMPN source is external input (CINx) 1: Comparator CMPN source is DAC output
SCIN	18E.6~4	R/W	7	Comparator CMPN external input select 000: Comparator CMPN external input is CIN1 (PA3) 001: Comparator CMPN external input is CIN2 (PA0) 010: Reserved 011: Comparator CMPN external input is CIN4 (PB4) 1xx: No connect
-	18E.3	-	-	This bit must be set as 1 in emulation
SCIP	18E.2~0	R/W	7	Comparator CMPP external input select 000: Comparator CMPP external input is CIP1 (PA1) 001: Comparator CMPP external input is CIP2 (PA2) 010: Comparator CMPP external input is CIP3 (PB6) 011: Reserved 1xx: No connect

Name	Address	R/W	Rst	Description
<b>DACTL (18Fh)</b>				<b>Function related to: DAC/Comparator</b>
SVRF	18F.7	R/W	0	DAC reference voltage select 0: $V_{CC}$ 1: $V_{BG}$ (voltage level is selected by ADVREFS)
SVL	18F.6~0	R/W	0	DAC output voltage select (reference source can be selected as $V_{CC}$ or $V_{BG}$ ) 000_0000: 0/128 * reference source 000_0001: 1/128 * reference source ... 111_1110: 126/128 * reference source 111_1111: 127/128 * reference source

## INSTRUCTION SET

Each instruction is a 16-bit word divided into an Op Code, which specifies the instruction type, and one or more operands, which further specify the operation of the instruction. The instructions can be categorized as byte-oriented, bit-oriented and literal operations list in the following table.

For byte-oriented instructions, “f” represents the address designator and “d” represents the destination designator. The address designator is used to specify which address in Program memory is to be used by the instruction. The destination designator specifies where the result of the operation is to be placed. If “d” is “0”, the result is placed in the W register. If “d” is “1”, the result is placed in the address specified in the instruction.

For bit-oriented instructions, “b” represents a bit field designator, which selects the number of the bit affected by the operation, while “f” represents the address designator. For literal operations, “k” represents the literal or constant value.

Field/Legend	Description
f	Register File Address
b	Bit address
k	Literal. Constant data or label
d	Destination selection field, 0: Working register, 1: Register file
W	Working Register
Z	Zero Flag
C	Carry Flag or /Borrow Flag
DC	Decimal Carry Flag or Decimal /Borrow Flag
PC	Program Counter
TOS	Top Of Stack
GIE	Global Interrupt Enable Flag (i-Flag)
[]	Option Field
()	Contents
.	Bit Field
B	Before
A	After
←	Assign direction

Mnemonic		Op Code	Cycle	Flag Affect	Description
<b>Byte-Oriented File Register Instruction</b>					
ADDW <del>X</del>	f, d	ff00 0111 dfff ffff	1	C, DC, Z	Add W and "f"
ANDW <del>X</del>	f, d	ff00 0101 dfff ffff	1	Z	AND W with "f"
CLR <del>X</del>	f	ff00 0001 1fff ffff	1	Z	Clear "f"
CLRW		0000 0001 0100 0000	1	Z	Clear W
COM <del>X</del>	f, d	ff00 1001 dfff ff ff	1	Z	Complement "f"
DEC <del>X</del>	f, d	ff00 0011 dfff ffff	1	Z	Decrement "f"
DEC <del>X</del> SZ	f, d	ff00 1011 dfff ffff	1 or 2	-	Decrement "f", skip if zero
INC <del>X</del>	f, d	ff00 1010 dfff ffff	1	Z	Increment "f"
INC <del>X</del> SZ	f, d	ff00 1111 dfff ffff	1 or 2	-	Increment "f", skip if zero
IORW <del>X</del>	f, d	ff00 0100 dfff ffff	1	Z	OR W with "f"
MOV <del>X</del>	f, d	ff00 1000 dfff ffff	1	Z	Move "f"
MOV <del>X</del> W	f	ff00 1000 0fff ffff	1	Z	Move "f" to W
MOVW <del>X</del>	f	ff00 0000 1fff ffff	1	-	Move W to "f"
RL <del>X</del>	f, d	ff00 1101 dfff ffff	1	C	Rotate left "f" through carry
RR <del>X</del>	f, d	ff00 1100 dfff ffff	1	C	Rotate right "f" through carry
SUBW <del>X</del>	f, d	ff00 0010 dfff ffff	1	C, DC, Z	Subtract W from "f"
SWAP <del>X</del>	f, d	ff00 1110 dfff ffff	1	-	Swap nibbles in "f"
TST <del>X</del>	f	ff00 1000 1fff ffff	1	Z	Test if "f" is zero
XORW <del>X</del>	f, d	ff00 0110 dfff ffff	1	Z	XOR W with "f"
<b>Bit-Oriented File Register Instruction</b>					
BC <del>X</del>	f, b	ff11 00bb bfff ffff	1	-	Clear "b" bit of "f"
BS <del>X</del>	f, b	ff11 01bb bfff ffff	1	-	Set "b" bit of "f"
BT <del>X</del> SC	f, b	ff11 10bb bfff ffff	1 or 2	-	Test "b" bit of "f", skip if clear
BT <del>X</del> SS	f, b	ff11 11bb bfff ffff	1 or 2	-	Test "b" bit of "f", skip if set
<b>Literal and Control Instruction</b>					
ADDLW	k	0001 1100 kkkk kkkk	1	C, DC, Z	Add Literal "k" and W
ANDLW	k	0001 1011 kkkk kkkk	1	Z	AND Literal "k" with W
L <del>C</del> ALL	k	kk10 0kkk kkkk kkkk	2	-	Call subroutine "k"
CLRWD <del>T</del>		0001 1110 0000 0100	1	TO, PD	Clear Watch Dog Timer
L <del>G</del> OTO	k	kk10 1kkk kkkk kkkk	2	-	Jump to branch "k"
IORLW	k	0001 1010 kkkk kkkk	1	Z	OR Literal "k" with W
MOVLW	k	0001 1001 kkkk kkkK	1	-	Move Literal "k" to W
NOP		0000 0000 0000 0000	1	-	No operation
RET		0000 0000 0100 0000	2	-	Return from subroutine
RETI		0000 0000 0110 0000	2	-	Return from interrupt
RETLW	k	0001 1000 kkkk kkkk	2	-	Return with Literal in W
SLEEP		0001 1110 0000 0011	1	TO, PD	Go into Power-down mode, Clock oscillation stops
SUBLW	k	0001 1111 kkkk kkkk	1	C, DC, Z	Subtract W from literal
TABRH		0000 0000 0101 1000	2	-	Lookup ROM high data to W and TABR
TABRL		0000 0000 0101 0000	2	-	Lookup ROM low data to W and TABR
XORLW	k	0001 1101 kkkk kkkk	1	Z	XOR Literal "k" with W

<b>ADDLW</b>	<b>Add Literal "k" and W</b>	
Syntax	ADDLW k	
Operands	k : 00h ~ FFh	
Operation	$(W) \leftarrow (W) + k$	
Status Affected	C, DC, Z	
OP-Code	0001 1100 kkkk kkkk	
Description	The contents of the W register are added to the eight-bit literal 'k' and the result is placed in the W register.	
Cycle	1	
Example	ADDLW 0x15	B : W =0x10 A : W =0x25

<b>ADDWX</b>	<b>Add W and "f"</b>	
Syntax	ADDWX f [,d]	
Operands	f : 000h ~ 1FFh, d : 0, 1	
Operation	$(\text{destination}) \leftarrow (W) + (f)$	
Status Affected	C, DC, Z	
OP-Code	ff00 0111 dfff ffff	
Description	Add the contents of the W register with register 'f'. If 'd' is 0, the result is stored in the W register. If 'd' is 1, the result is stored back in register 'f'.	
Cycle	1	
Example	ADDWX FSR, 0	B : W =0x17, FSR =0xC2 A : W =0xD9, FSR =0xC2

<b>ANDLW</b>	<b>Logical AND Literal "k" with W</b>	
Syntax	ANDLW k	
Operands	k : 00h ~ FFh	
Operation	$(W) \leftarrow (W) \text{ AND } k$	
Status Affected	Z	
OP-Code	0001 1011 kkkk kkkk	
Description	The contents of W register are AND'ed with the eight-bit literal 'k'. The result is placed in the W register.	
Cycle	1	
Example	ANDLW 0x5F	B : W =0xA3 A : W =0x03

<b>ANDWX</b>	<b>AND W with "f"</b>	
Syntax	ANDWX f [,d]	
Operands	f : 000h ~ 1FFh, d : 0, 1	
Operation	$(\text{destination}) \leftarrow (W) \text{ AND } (f)$	
Status Affected	Z	
OP-Code	ff00 0101 dfff ffff	
Description	AND the W register with register 'f'. If 'd' is 0, the result is stored in the W register. If 'd' is 1, the result is stored back in register 'f'.	
Cycle	1	
Example	ANDWX FSR, 1	B : W =0x17, FSR =0xC2 A : W =0x17, FSR =0x02



---

**BCX Clear "b" bit of "f"**


---

Syntax	BCX f [,b]	
Operands	f : 000h ~ 1FFh, b : 0 ~ 7	
Operation	(f.b) ← 0	
Status Affected	-	
OP-Code	ff11 00bb bfff ffff	
Description	Bit 'b' in register 'f' is cleared.	
Cycle	1	
Example	BCX FLAG_REG, 7	B : FLAG_REG =0xC7 A : FLAG_REG =0x47

---

**BSX Set "b" bit of "f"**


---

Syntax	BSX f [,b]	
Operands	f : 000h ~ 1FFh, b : 0 ~ 7	
Operation	(f.b) ← 1	
Status Affected	-	
OP-Code	ff11 01bb bfff ffff	
Description	Bit 'b' in register 'f' is set.	
Cycle	1	
Example	BSX FLAG_REG, 7	B : FLAG_REG =0x0A A : FLAG_REG =0x8A

---

**BTXSC Test "b" bit of "f", skip if clear(0)**


---

Syntax	BTXSC f [,b]	
Operands	f : 000h ~ 1FFh, b : 0 ~ 7	
Operation	Skip next instruction if (f.b) =0	
Status Affected	-	
OP-Code	ff11 10bb bfff ffff	
Description	If bit 'b' in register 'f' is 1, then the next instruction is executed. If bit 'b' in register 'f' is 0, then the next instruction is discarded, and a NOP is executed instead, making this a 2nd cycle instruction.	
Cycle	1 or 2	
Example	LABEL1: BTXSC FLAG, 1      B : PC =LABEL1 TRUE:    LGOTO SUB1      A : if FLAG.1 =0, PC =FALSE FALSE:    ...              if FLAG.1 =1, PC =TRUE	

---

**BTXSS Test "b" bit of "f", skip if set(1)**


---

Syntax	BTXSS f [,b]	
Operands	f : 000h ~ 1FFh, b : 0 ~ 7	
Operation	Skip next instruction if (f.b) =1	
Status Affected	-	
OP-Code	ff11 11bb bfff ffff	
Description	If bit 'b' in register 'f' is 0, then the next instruction is executed. If bit 'b' in register 'f' is 1, then the next instruction is discarded, and a NOP is executed instead, making this a 2nd cycle instruction.	
Cycle	1 or 2	
Example	LABEL1: BTXSS FLAG, 1      B : PC =LABEL1 TRUE:    LGOTO SUB1      A : if FLAG.1 =0, PC =TRUE FALSE:    ...              if FLAG.1 =1, PC =FALSE	

---

**CLR X                      Clear "f"**


---

Syntax	CLR X f	
Operands	f : 000h ~ 1FFh	
Operation	(f) ← 00h, Z ← 1	
Status Affected	Z	
OP-Code	ff00 0001 1fff ffff	
Description	The contents of register 'f' are cleared and the Z bit is set.	
Cycle	1	
Example	CLR X FLAG_REG	B : FLAG_REG =0x5A A : FLAG_REG =0x00, Z =1

---

**CLR W                      Clear W**


---

Syntax	CLR W	
Operands	-	
Operation	(W) ← 00h, Z ← 1	
Status Affected	Z	
OP-Code	0000 0001 0100 0000	
Description	W register is cleared and Z bit is set.	
Cycle	1	
Example	CLR W	B : W =0x5A A : W =0x00, Z =1

---

**CLR WDT                      Clear Watchdog Timer**


---

Syntax	CLR WDT	
Operands	-	
Operation	WDT Timer ← 00h	
Status Affected	TO, PD	
OP-Code	0001 1110 0000 0100	
Description	CLR WDT instruction clears the Watchdog Timer	
Cycle	1	
Example	CLR WDT	B : WDT counter =? A : WDT counter =0x00

---

**COM X                      Complement "f"**


---

Syntax	COM X f [,d]	
Operands	f : 000h ~ 1FFh, d : 0, 1	
Operation	(destination) ← ( $\bar{f}$ )	
Status Affected	Z	
OP-Code	ff00 1001 dfff ffff	
Description	The contents of register 'f' are complemented. If 'd' is 0, the result is stored in W. If 'd' is 1, the result is stored back in register 'f'.	
Cycle	1	
Example	COM X REG1, 0	B : REG1 =0x13 A : REG1 =0x13, W =0xEC

<b>DECX</b>	<b>Decrement "f"</b>
Syntax	DECX f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) $\leftarrow$ (f) - 1
Status Affected	Z
OP-Code	ff00 0011 dfff ffff
Description	Decrement register 'f'. If 'd' is 0, the result is stored in the W register. If 'd' is 1, the result is stored back in register 'f'.
Cycle	1
Example	DECX CNT, 1 B : CNT =0x01, Z =0 A : CNT =0x00, Z =1

<b>DECXSZ</b>	<b>Decrement "f", Skip if 0</b>
Syntax	DECXSZ f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) $\leftarrow$ (f) - 1, skip next instruction if result is 0
Status Affected	-
OP-Code	ff00 1011 dfff ffff
Description	The contents of register 'f' are decremented. If 'd' is 0, the result is placed in the W register. If 'd' is 1, the result is placed back in register 'f'. If the result is 1, the next instruction is executed. If the result is 0, then a NOP is executed instead, making it a 2 cycle instruction.
Cycle	1 or 2
Example	LABEL1: DECXSZ CNT, 1 B : PC =LABEL1 LGOTO LOOP A : CNT =CNT - 1 CONTINUE: if CNT =0, "LGOTO LOOP" is replace with NOP if CNT $\neq$ 0, "LGOTO LOOP" will be executed

<b>INCX</b>	<b>Increment "f"</b>
Syntax	INCX f [,d]
Operands	f : 000h ~ 1FFh
Operation	(destination) $\leftarrow$ (f) + 1
Status Affected	Z
OP-Code	ff00 1010 dfff ffff
Description	The contents of register 'f' are incremented. If 'd' is 0, the result is placed in the W register. If 'd' is 1, the result is placed back in register 'f'.
Cycle	1
Example	INCX CNT, 1 B : CNT =0xFF, Z =0 A : CNT =0x00, Z =1



<b>INCXSZ</b>	<b>Increment "f", Skip if 0</b>
Syntax	INCXSZ f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) $\leftarrow$ (f) + 1, skip next instruction if result is 0
Status Affected	-
OP-Code	ff00 1111 dfff ffff
Description	The contents of register 'f' are incremented. If 'd' is 0, the result is placed in the W register. If 'd' is 1, the result is placed back in register 'f'. If the result is 1, the next instruction is executed. If the result is 0, a NOP is executed instead, making it a 2 cycle instruction.
Cycle	1 or 2
Example	<pre> LABEL1:  INCXSZ CNT, 1    B : PC =LABEL1           LGOTO LOOP      A : CNT =CNT + 1 CONTINUE:           if CNT =0, "LGOTO LOOP" is replace           with NOP           if CNT <math>\neq</math>0, "LGOTO LOOP" will be           executed </pre>
<b>IORLW</b>	<b>Inclusive OR Literal with W</b>
Syntax	IORLW k
Operands	k : 00h ~ FFh
Operation	(W) $\leftarrow$ (W) OR k
Status Affected	Z
OP-Code	0001 1010 kkkk kkkk
Description	The contents of the W register are OR'ed with the eight-bit literal 'k'. The result is placed in the W register.
Cycle	1
Example	<pre> IORLW 0x35           B : W =0x9A           A : W =0xBF, Z =0 </pre>
<b>IORWX</b>	<b>Inclusive OR W with "f"</b>
Syntax	IORWX f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) $\leftarrow$ (W) OR (f)
Status Affected	Z
OP-Code	ff00 0100 dfff ffff
Description	Inclusive OR the W register with register 'f'. If 'd' is 0, the result is placed in the W register. If 'd' is 1, the result is placed back in register 'f'.
Cycle	1
Example	<pre> IORWX RESULT, 0           B : RESULT =0x13, W =0x91           A : RESULT =0x13, W =0x93, Z =0 </pre>

<b>LCALL</b>	<b>Call subroutine "k"</b>
Syntax	LCALL k
Operands	k : 0000h ~ 1FFFh
Operation	Operation: TOS $\leftarrow$ (PC) + 1, PC.12~0 $\leftarrow$ k
Status Affected	-
OP-Code	kk10 0kkk kkkk kkkk
Description	LCALL Subroutine. First, return address (PC+1) is pushed onto the stack. The 13-bit immediate address is loaded into PC bits <12:0>. LCALL is a two-cycle instruction.
Cycle	2
Example	LABEL1: LCALL SUB1      B : PC =LABEL1 A : PC =SUB1, TOS =LABEL1 + 1

<b>LGOTO</b>	<b>Unconditional Branch</b>
Syntax	LGOTO k
Operands	k : 0000h ~ 1FFFh
Operation	PC.12~0 $\leftarrow$ k
Status Affected	-
OP-Code	kk10 1kkk kkkk kkkk
Description	LGOTO is an unconditional branch. The 13-bit immediate value is loaded into PC bits <12:0>. LGOTO is a two-cycle instruction.
Cycle	2
Example	LABEL1: LGOTO SUB1      B : PC =LABEL1 A : PC =SUB1

<b>MOVX</b>	<b>Move f</b>
Syntax	MOVX f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) $\leftarrow$ (f)
Status Affected	Z
OP-Code	ff00 1000 dfff ffff
Description	The contents of register 'f' are moved to a destination dependent upon the status of d. If d=0, destination is W register. If d=1, the destination is file register f itself. d=1 is useful to test a file register, since status flag Z is affected.
Cycle	1
Example	MOVX FSR,0      B : FSR =0xC2, W =? A : FSR =0xC2, W =0xC2

<b>MOVXW</b>	<b>Move "f" to W</b>
Syntax	MOVXW f
Operands	f : 000h ~ 1FFh
Operation	(W) $\leftarrow$ (f)
Status Affected	Z
OP-Code	ff00 1000 0fff ffff
Description	The contents of register 'f' are moved to W register.
Cycle	1
Example	MOVXW FSR      B : FSR =0xC2, W =? A : FSR =0xC2, W =0xC2

<b>MOVLW</b>	<b>Move Literal to W</b>	
Syntax	MOVLW k	
Operands	k : 00h ~ FFh	
Operation	(W) ← k	
Status Affected	-	
OP-Code	0001 1001 kkkk kkkk	
Description	The eight-bit literal 'k' is loaded into W register. The don't cares will assemble as 0's.	
Cycle	1	
Example	MOVLW 0x5A	B : W =? A : W =0x5A

<b>MOVWX</b>	<b>Move W to 'f'</b>	
Syntax	MOVWX f	
Operands	f : 000h ~ 1FFh	
Operation	(f) ← (W)	
Status Affected	-	
OP-Code	ff00 0000 1fff ffff	
Description	Move data from W register to register 'f'.	
Cycle	1	
Example	MOVWX REG1	B : REG1 =0xFF, W =0x4F A : REG1 =0x4F, W =0x4F

<b>NOP</b>	<b>No Operation</b>	
Syntax	NOP	
Operands	-	
Operation	No Operation	
Status Affected	-	
OP-Code	0000 0000 0000 0000	
Description	No Operation	
Cycle	1	
Example	NOP	-


<b>RET</b>	<b>Return from Subroutine</b>	
Syntax	RET	
Operands	-	
Operation	PC ← TOS	
Status Affected	-	
OP-Code	0000 0000 0100 0000	
Description	Return from subroutine. The stack is POPed and the top of the stack (TOS) is loaded into the program counter. This is a two-cycle instruction.	
Cycle	2	
Example	RET	A : PC =TOS



---

**RRX                      Rotate Right "f" through Carry**


---

Syntax	RRX f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	
Status Affected	C
OP-Code	ff00 1100 dfff ffff
Description	The contents of register 'f' are rotated one bit to the right through the Carry Flag. If 'd' is 0, the result is placed in the W register. If 'd' is 1, the result is placed back in register 'f'.
Cycle	1
Example	RRX REG1, 0                      B : REG1 =1110 0110, C =0 A : REG1 =1110 0110 W    =0111 0011, C =0

---

**SLEEP                      Go into Power-down mode, Clock oscillation stops**


---

Syntax	SLEEP
Operands	-
Operation	-
Status Affected	TO, PD
OP-Code	001 1110 0000 0011
Description	Go into Power-down mode with the oscillator stops.
Cycle	1
Example	SLEEP                      -

---

**SUBLW                      Subtract W from Literal**


---

Syntax	SUBLW k
Operands	k : 00h ~ FFh
Operation	$(W) \leftarrow k - (W)$
Status Affected	C, DC, Z
OP-Code	0001 1111 kkkk kkkk
Description	The W register is subtracted (2's complement method) from the eight-bit literal "k". The result is placed in the W register.
Cycle	1
Example	SUBLW 0x15                      B : W =0x25 A : W =0xF0



**SUBWX**
**Subtract W from 'f'**

Syntax	SUBWX f[,d]		
Operands	f : 000h ~ 1FFh, d : 0, 1		
Operation	(destination) $\leftarrow$ (f) - (W)		
Status Affected	C, DC, Z		
OP-Code	ff00 0010 dfff ffff		
Description	Subtract (2's complement method) W register from register 'f'. If 'd' is 0, the result is stored in the W register. If 'd' is 1, the result is stored back in register 'f'.		
Cycle	1		
Example	SUBWX REG1, 1		B : REG1 =0x03, W =0x02, C=?, Z=? A : REG1 =0x01, W =0x02, C=1, Z=0
	SUBWX REG1, 1		B : REG1 =0x02, W =0x02, C=?, Z=? A : REG1 =0x00, W =0x02, C=1, Z=1
	SUBWX REG1, 1		B : REG1 =0x01, W =0x02, C=?, Z=? A : REG1 =0xFF, W =0x02, C=0, Z=0

**SWAPX**
**Swap Nibbles in 'f'**

Syntax	SWAPX f[,d]		
Operands	f : 000h ~ 1FFh, d : 0, 1		
Operation	(destination,7~4) $\leftarrow$ (f,3~0), (destination,3~0) $\leftarrow$ (f,7~4)		
Status Affected	-		
OP-Code	ff00 1110 dfff ffff		
Description	The upper and lower nibbles of register 'f' are exchanged. If 'd' is 0, the result is placed in W register. If 'd' is 1, the result is placed in register 'f'.		
Cycle	1		
Example	SWAPX REG1, 0		B : REG1 =0xA5 A : REG1 =0xA5, W =0x5A

**TABRH**
**Return DPTR high byte to W**

Syntax	TABRH		
Operands	-		
Operation	(W) $\leftarrow$ ROM[DPTR] high byte content, (TABR) $\leftarrow$ ROM[DPTR] high byte content, Where DPTR = {DPH[max:8], DPL[7:0]}		
Status Affected	-		
OP-Code	0000 0000 0101 1000		
Description	The W and TABR register is loaded with high byte of ROM[DPTR]. This is a two-cycle instruction.		
Cycle	2		
Example	MOVLW (TAB1&0xFF)		
	MOVWX DPL		;Where DPL is register
	MOVLW (TAB1>>8)&0xFF		
	MOVWX DPH		;Where DPH is register
	TABRL		;W =0x89, TABR=0x89
	TABRH		;W =0x37, TABR=0x37
	ORG 0234H		
	TAB1:		
	DT	0x3789, 0x2277	;ROM data 16 bits



<b>XORWX</b>	<b>Exclusive OR W with 'f'</b>
Syntax	XORWX f [,d]
Operands	f : 000h ~ 1FFh, d : 0, 1
Operation	(destination) ← (W) XOR (f)
Status Affected	Z
OP-Code	ff00 0110 dfff ffff
Description	Exclusive OR the contents of the W register with register 'f'. If 'd' is 0, the result is stored in the W register. If 'd' is 1, the result is stored back in register 'f'.
Cycle	1
Example	<div> XORWX REG1, 1 <div> B : REG1 =0xAF, W =0xB5 A : REG1 =0x1A, W =0xB5 </div> </div>

## ELECTRICAL CHARACTERISTICS

### 1. Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

Parameter	Rating	Unit
Supply voltage	$V_{SS} - 0.3$ to $V_{SS} + 5.5$	V
Input voltage	$V_{SS} - 0.3$ to $V_{CC} + 0.3$	
Output voltage	$V_{SS} - 0.3$ to $V_{CC} + 0.3$	
Output current high per 1 PIN	-25	mA
Output current high per all PIN	-80	
Output current low per 1 PIN	+30	
Output current low per all PIN	+150	
Maximum operating voltage	5.5	V
Operating temperature	-40 to +105	$^\circ\text{C}$
Storage temperature	-65 to +150	

### 2. DC Characteristics ( $T_A = 25^\circ\text{C}$ , $V_{CC} = 5.0\text{V}$ , unless otherwise specified)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Operating Voltage	V <sub>cc</sub>	Fsys = 20 MHz (FXT) (RDCTL=8ns)(PWMCKS=FIRC*1)		3.1	–	5.5	V
		Fsys = 16 MHz (FIRC) (RDCTL=8ns)(PWMCKS=FIRC*1)		2.3	–	5.5	V
		Fsys = 8 MHz (FIRC/2)		1.4	–	5.5	V
Input High Voltage	V <sub>IH</sub>	All Input	V <sub>CC</sub> = 3.0~5.0V	0.6V <sub>CC</sub>	–	V <sub>CC</sub>	V
Input Low Voltage	V <sub>IL</sub>	All Input	V <sub>CC</sub> = 3.0~5.0V	V <sub>SS</sub>	–	0.2V <sub>CC</sub>	V
I/O port Source Current	I <sub>OH</sub>	All I/O pin	V <sub>CC</sub> = 5.0V, V <sub>OH</sub> = 4.5V	6	12.7	–	mA
			V <sub>CC</sub> = 3.0V, V <sub>OH</sub> = 2.7V	2.5	5.3	–	
I/O port Sink Current	I <sub>OL</sub>	All I/O pin except PA7 (HSINK=1)	V <sub>CC</sub> = 5.0V, V <sub>OL</sub> = 0.5V	40	89	–	mA
			V <sub>CC</sub> = 3.0V, V <sub>OL</sub> = 0.3V	18	40	–	
		All I/O pin (HSINK=0)	V <sub>CC</sub> = 5.0V, V <sub>OL</sub> = 0.5V	25	48	–	mA
			V <sub>CC</sub> = 3.0V, V <sub>OL</sub> = 0.3V	10	21	–	
Input Leakage Current (pin high)	I <sub>ILH</sub>	All Input	V <sub>IN</sub> = V <sub>CC</sub>	–	–	1	μA
Input Leakage Current (pin low)	I <sub>ILL</sub>	All Input	V <sub>IN</sub> = 0V	–	–	–1	μA

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply Current (No Load)	$I_{CC}$	FAST mode FXT 20 MHz POR/LVR On	$V_{CC} = 5.0V$	–	5.1	–
			$V_{CC} = 3.0V$	–	2.7	–
		FAST mode FIRC 16 MHz	$V_{CC} = 5.0V$	–	4.1	–
			$V_{CC} = 3.0V$	–	2.5	–
		FAST mode FIRC 8 MHz	$V_{CC} = 5.0V$	–	2.9	–
			$V_{CC} = 3.0V$	–	1.7	–
		FAST mode FIRC 4 MHz	$V_{CC} = 5.0V$	–	2.3	–
			$V_{CC} = 3.0V$	–	1.4	–
		FAST mode FIRC 2 MHz	$V_{CC} = 5.0V$	–	2.0	–
			$V_{CC} = 3.0V$	–	1.2	–
		SLOW mode SXT 32 KHz FIRC STOP POR/LVR On	$V_{CC} = 5.0V$	–	0.67	–
			$V_{CC} = 3.0V$	–	0.5	–
		SLOW mode SIRC div1 FIRC STOP POR/LVR On	$V_{CC} = 5.0V$	–	0.65	–
			$V_{CC} = 3.0V$	–	0.47	–
Pull-up Resistor	$R_{UP}$	$V_{IN} = 0V$ Ports A, B	$V_{CC} = 5.0V$	–	34.5	–
			$V_{CC} = 3.0V$	–	35	–
		IDLE mode SIRC div1 POR/LVR Off	$V_{CC} = 5.0V$	–	8.4	–
			$V_{CC} = 3.0V$	–	2.7	–
1.2V LDO regulator	LDOC	$V_{CC} = 2.5 \sim 5.0V$ No Load	1.178	1.2	1.224	V
		$V_{CC} = 2.5 \sim 5.0V$ $I_{oh}=60mA, T_A = -20^{\circ}C \sim 85^{\circ}C,$	1.129	1.15	1.173	V
POR Voltage	$V_{POR}$	$T_A = 25^{\circ}C$	1.65	1.8	1.95	V

### 3. Clock Timing

Parameter	Condition	Min.	Typ.	Max.	Unit
FIRC Frequency (*)	$T_A = -40^{\circ}C \sim 105^{\circ}C$ $V_{CC} = 3.0 \sim 5.0V$	-5%	16	+2%	MHz
	$T_A = -40^{\circ}C \sim 105^{\circ}C$ $V_{CC} = 4.0V$	-3%	16	+1.5%	
	$T_A = 0^{\circ}C \sim 70^{\circ}C$ $V_{CC} = 4.0V$	-2%	16	+1.5%	
	$T_A = 25^{\circ}C$ $V_{CC} = 3.0 \sim 5.0V$	-1%	16	+1%	
	$T_A = 25^{\circ}C$ $V_{CC} = 4.0V$	-0.5%	16	+0.5%	

(\*) FIRC frequency can be divided by 1/2/4/8.

### 4. Reset Timing Characteristics ( $T_A = 25^{\circ}C$ )

Parameter	Conditions	Min.	Typ.	Max.	Unit
RESET Input Low width	Input $V_{CC} = 5.0V \pm 10\%$	–	11	–	$\mu s$
WDT time	$V_{CC} = 5.0V$ , WDTPSC = 11b	–	1344	–	ms
WKT time	$V_{CC} = 5.0V$ , WKTPSC = 11b	–	84	–	ms
CPU start up time	$V_{CC} = 5.0V$	–	21	–	ms

**5. LVR Circuit Characteristics ( $T_A = 25^\circ\text{C}$ )**
**TM56M1522/21H**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
LVR Voltage	$\text{LVR}_{\text{th}}$	$T_A = 25^\circ\text{C}$	–	2.05	–	V
			–	2.20	–	
			–	2.30	–	
			–	2.45	–	
			–	2.60	–	
			–	2.75	–	
			–	2.90	–	
			–	3.00	–	
			–	3.15	–	
			–	3.30	–	
			–	3.45	–	
			–	3.60	–	
			–	3.70	–	
			–	3.85	–	
			–	4.00	–	
			–	4.15	–	
LVR Hysteresis Window	$\text{V}_{\text{HYS\_LVR}}$	$T_A = 25^\circ\text{C}$	–	0	–	mV
Low Voltage Detection time	$\text{T}_{\text{LVR}}$	$T_A = 25^\circ\text{C}$	100	–	–	$\mu\text{s}$

**TM56M1522B/22C/22L**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
LVR Voltage	$\text{LVR}_{\text{th}}$	$T_A = 25^\circ\text{C}$	–	1.80	–	V
			–	1.93	–	
			–	2.07	–	
			–	2.21	–	
			–	2.36	–	
			–	2.49	–	
			–	2.63	–	
			–	2.77	–	
			–	2.91	–	
			–	3.06	–	
			–	3.20	–	
			–	3.34	–	
			–	3.48	–	
			–	3.63	–	
			–	3.77	–	
			–	3.90	–	
LVR Hysteresis Window	$\text{V}_{\text{HYS\_LVR}}$	$T_A = 25^\circ\text{C}$	–	0	–	mV
Low Voltage Detection time	$\text{T}_{\text{LVR}}$	$T_A = 25^\circ\text{C}$	100	–	–	$\mu\text{s}$

**6. LVD Circuit Characteristics ( $T_A = 25^\circ\text{C}$ )**
**TM56M1522/21H**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
LVD Voltage	$\text{LVD}_{\text{th}}$	$T_A = 25^\circ\text{C}$	–	2.20	–	V
			–	2.30	–	
			–	2.45	–	
			–	2.60	–	
			–	2.75	–	
			–	2.90	–	
			–	3.00	–	
			–	3.15	–	
			–	3.30	–	
			–	3.45	–	
			–	3.60	–	
			–	3.70	–	
			–	3.85	–	
			–	4.00	–	
			–	4.15	–	
LVD Hysteresis Window	$V_{\text{HYS\_LVD}}$	LVDHYS = 0	–	0	–	mV
		LVDHYS = 1	–	36	–	
Low Voltage Detection time	$T_{\text{LVD}}$	$T_A = 25^\circ\text{C}$	100	–	–	$\mu\text{s}$

**TM56M1522B/22C/22L**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
LVD Voltage	$\text{LVD}_{\text{th}}$	$T_A = 25^\circ\text{C}$	–	1.93	–	V
			–	2.06	–	
			–	2.19	–	
			–	2.35	–	
			–	2.48	–	
			–	2.62	–	
			–	2.76	–	
			–	2.89	–	
			–	3.03	–	
			–	3.16	–	
			–	3.30	–	
			–	3.45	–	
			–	3.59	–	
			–	3.73	–	
			–	3.87	–	
LVD Hysteresis Window	$V_{\text{HYS\_LVD}}$	LVDHYS = 0	–	0	–	mV
		LVDHYS = 1	–	65	–	
Low Voltage Detection time	$T_{\text{LVD}}$	$T_A = 25^\circ\text{C}$	100	–	–	$\mu\text{s}$

**7. ADC Electrical Characteristics** ( $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 3.0\text{V}$  to  $5.5\text{V}$ ,  $V_{SS} = 0\text{V}$ )



Parameter	Conditions	Min.	Typ.	Max.	Units
Total Accuracy	$V_{CC} = 5.0\text{V}$ , $V_{SS} = 0\text{V}$ , $F_{ADC} = 1\text{ MHz}$	–	$\pm 3$	–	LSB
Integral Non-Linearity		–	$\pm 3.2$	–	
Differential Non-Linearity		–	$\pm 1$	$\pm 4$	
Max Input Clock freq. ( $F_{ADC}$ )	Source impedance ( $R_s < 10\text{K ohm}$ )	–	–	2	MHz
	Source impedance ( $R_s < 20\text{K ohm}$ )	–	–	1	
	Source impedance ( $R_s < 50\text{K ohm}$ )	–	–	0.5	
	Source is VBG (ADCHS=01110b)	–	–	2	
Conversion Time	$F_{ADC} = 1\text{ MHz}$ (Include sample and hold time)	–	42	–	$\mu\text{s}$
BandGap Voltage Reference ( $V_{BG}$ )	$25^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.0\text{V}$	-1%	1.20	+1%	V
	$25^\circ\text{C} \sim 105^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.0\text{V}$	-1%	1.20	+1.5%	V
	$-20^\circ\text{C} \sim 105^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.0\text{V}$	-2%	1.20	+1.5%	V
ADC reference voltage ( $V_{REF}$ ) (ADVREFS=01b)	$25^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.5\text{V}$	-1.2%	2.48	+1.2%	V
	$-20^\circ\text{C} \sim 105^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.5\text{V}$	-2.5%	2.48	+2%	V
ADC reference voltage ( $V_{REF}$ ) (ADVREFS=11b)	$25^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.5\text{V}$	–	2	–	V
	$-20^\circ\text{C} \sim 105^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.5\text{V}$	–	2	–	V
$V_{CC}/4$ reference voltage	$25^\circ\text{C}$ , $V_{CC} = 3.0\text{V} \sim 5.5\text{V}$	-1%	$0.25V_{CC}$	+1%	V
Input Voltage	–	$V_{SS}$	–	$V_{CC}$	V



**8. Comparator Characteristics** ( $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 3.0\text{V}$  to  $5.5\text{V}$ ,  $V_{SS} = 0\text{V}$ )


Parameter	Conditions	Min.	Typ.	Max.	Units
Power supply	–	2.2	–	5.5	V
Quiescent Current	$V_{CC} = 5.0\text{V}$	–	100	–	$\mu\text{A}$
DAC Current	$V_{CC} = 5.0\text{V}$	60	–	220	$\mu\text{A}$
$V_{OS\_CMP}$	$V_{CC} = 5.0\text{V}$	-15	–	15	mV
$V_{CM\_CMP}$	$V_{CC} = 5.0\text{V}$	0	–	$V_{CC}-0.5$	V
$V_{HYS\_CMP}$	$V_{CC} = 5.0\text{V}$	–	25	–	mV




## 9. Characteristics Graphs

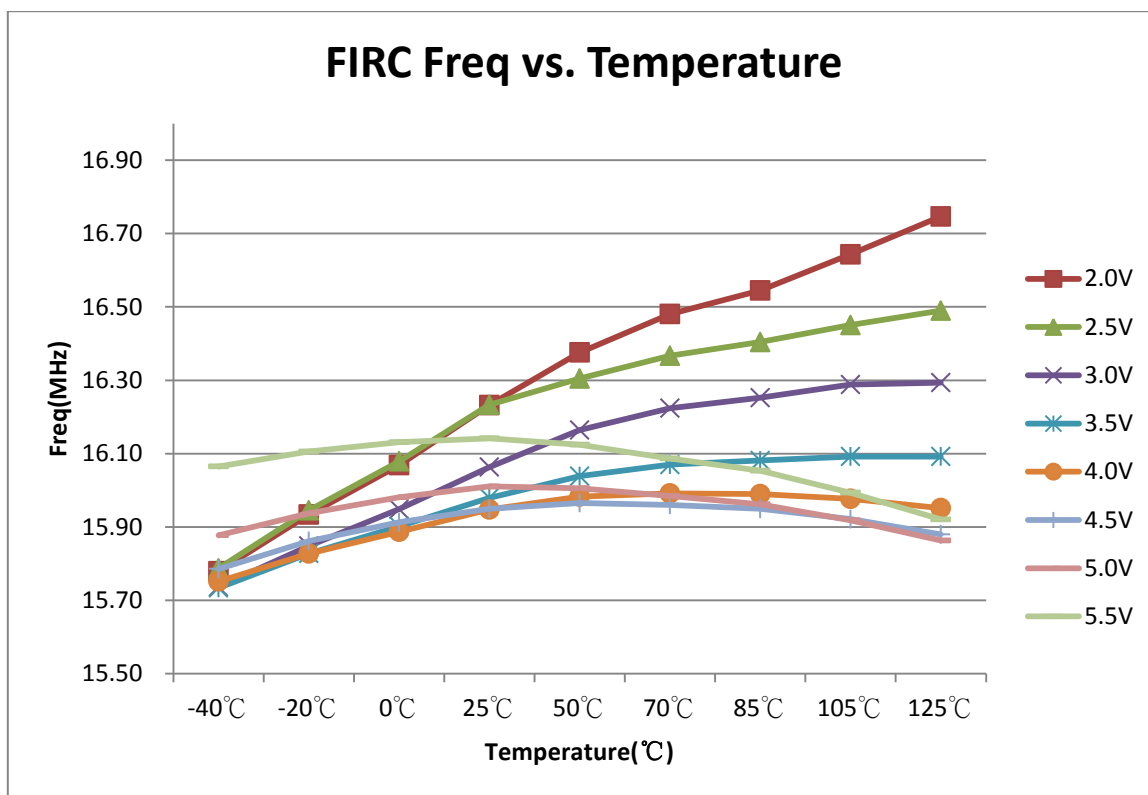
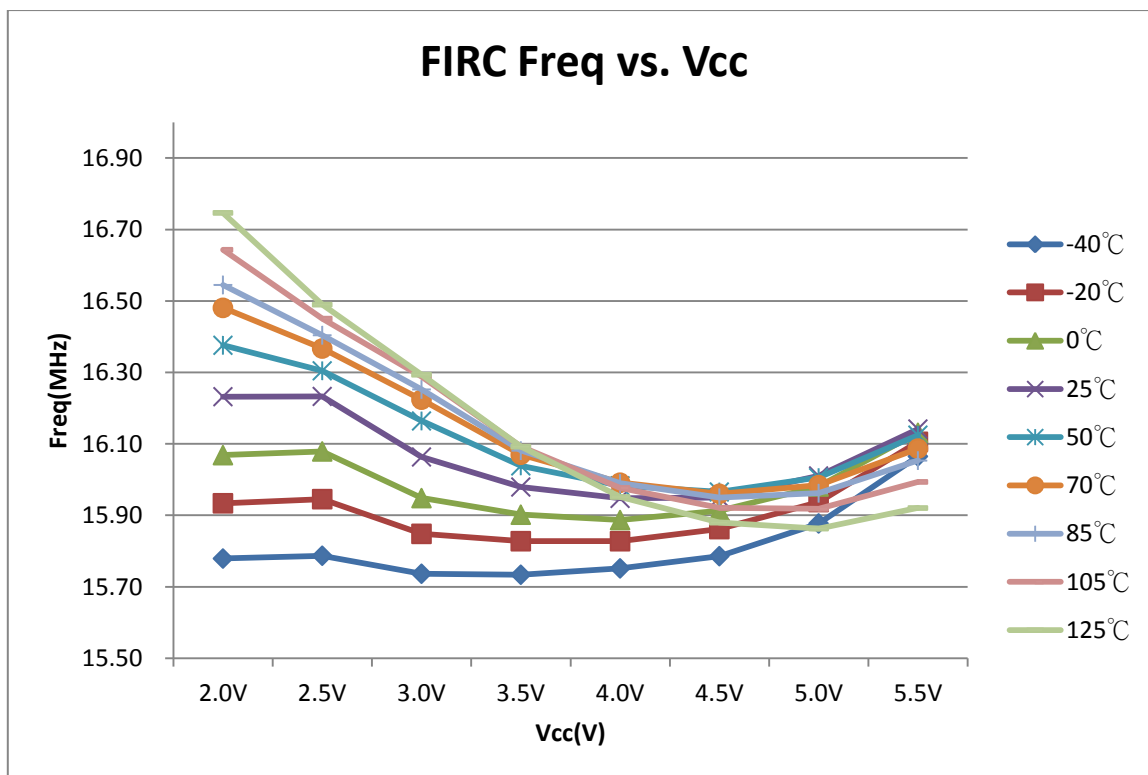


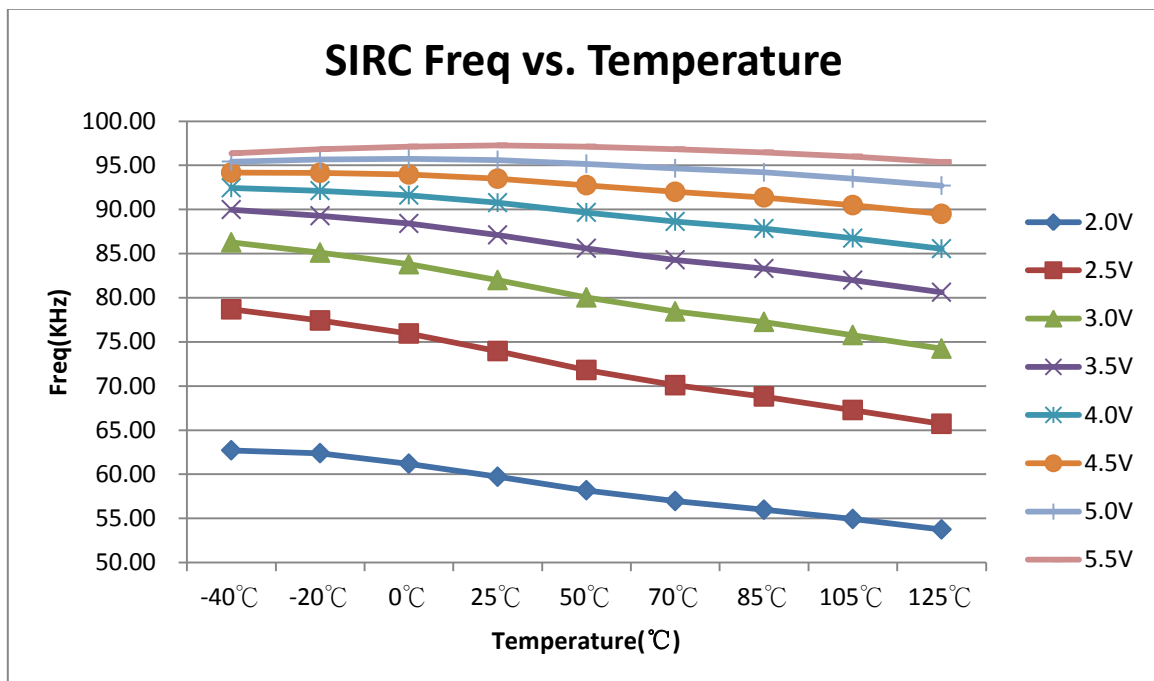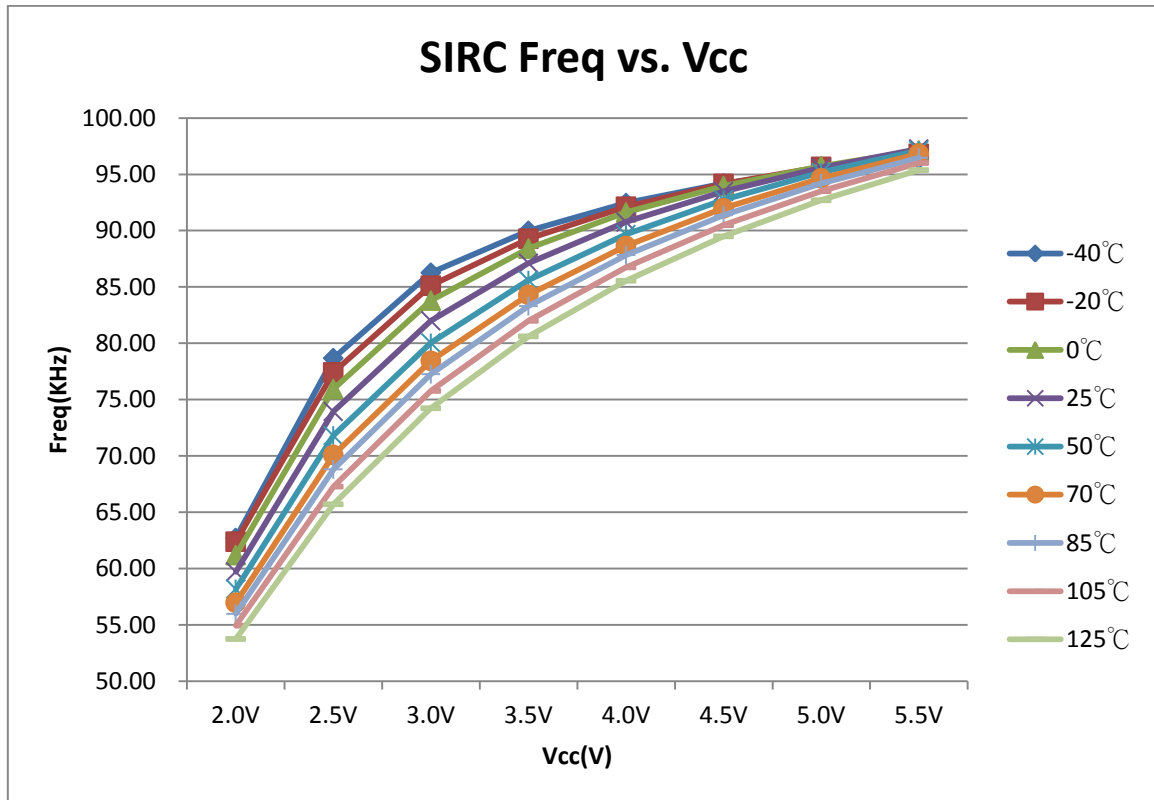

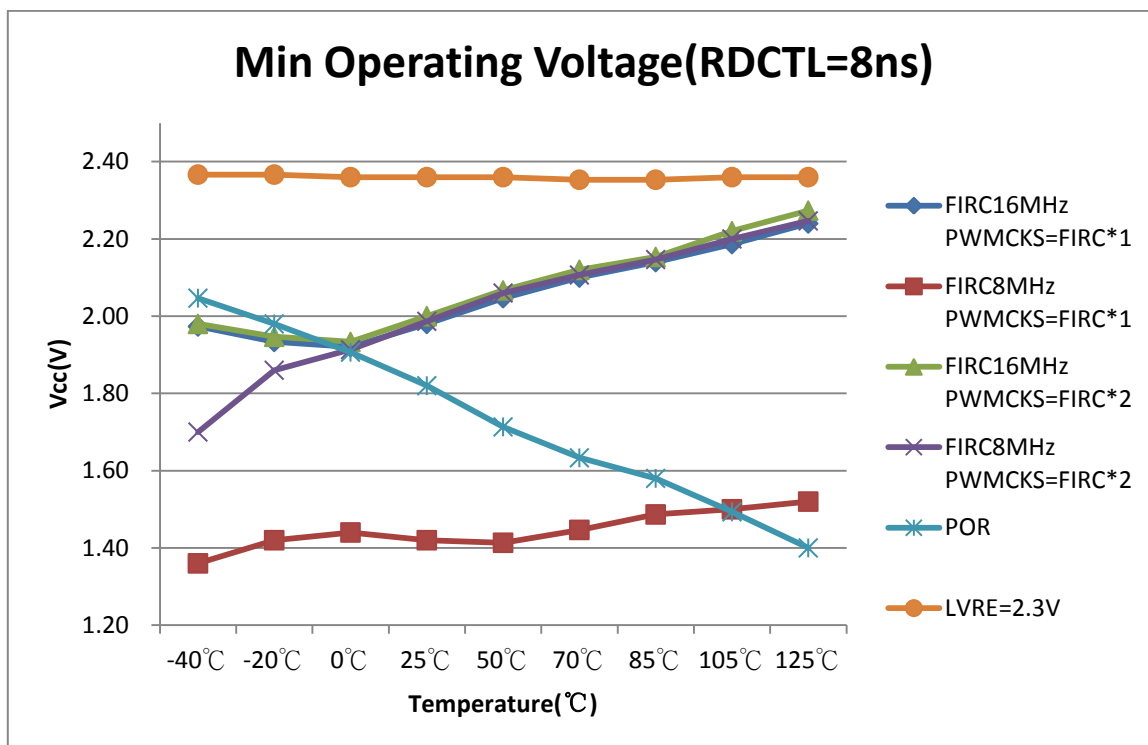

Note: The user must switch RDCTL to “8ns” to enhance the performance of minimal operating voltage.

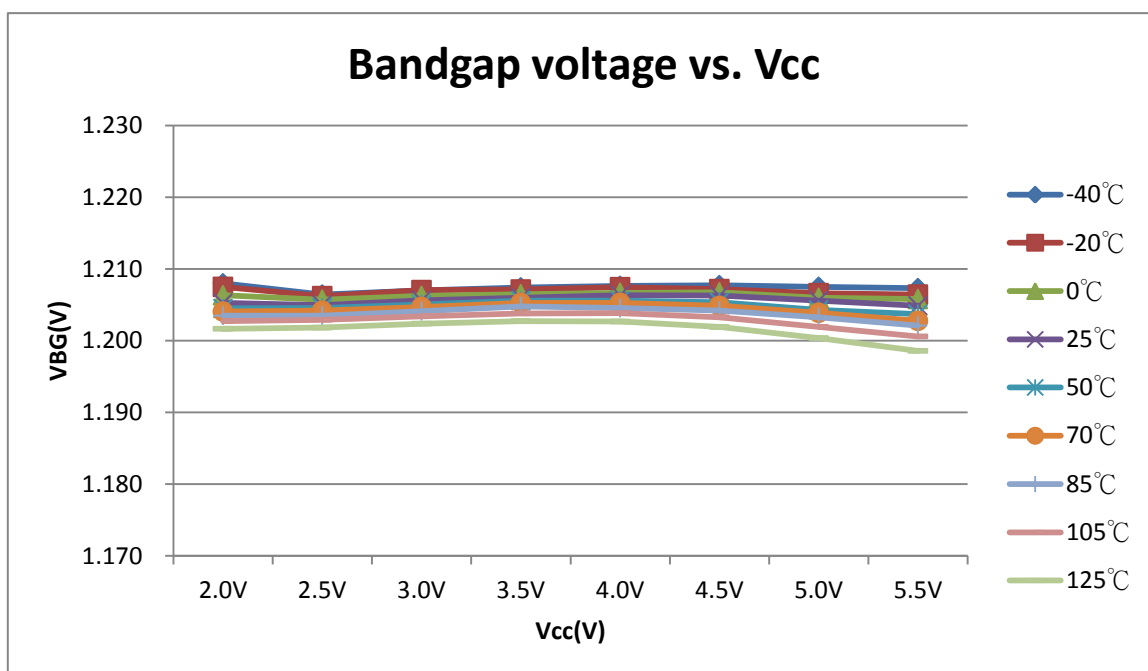

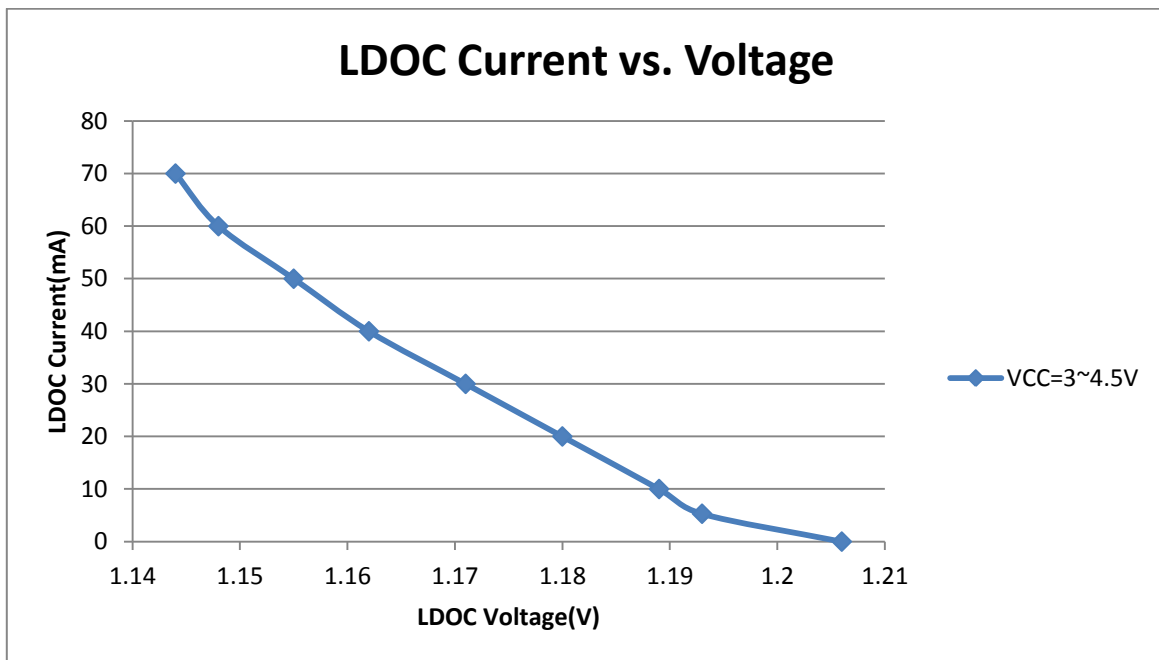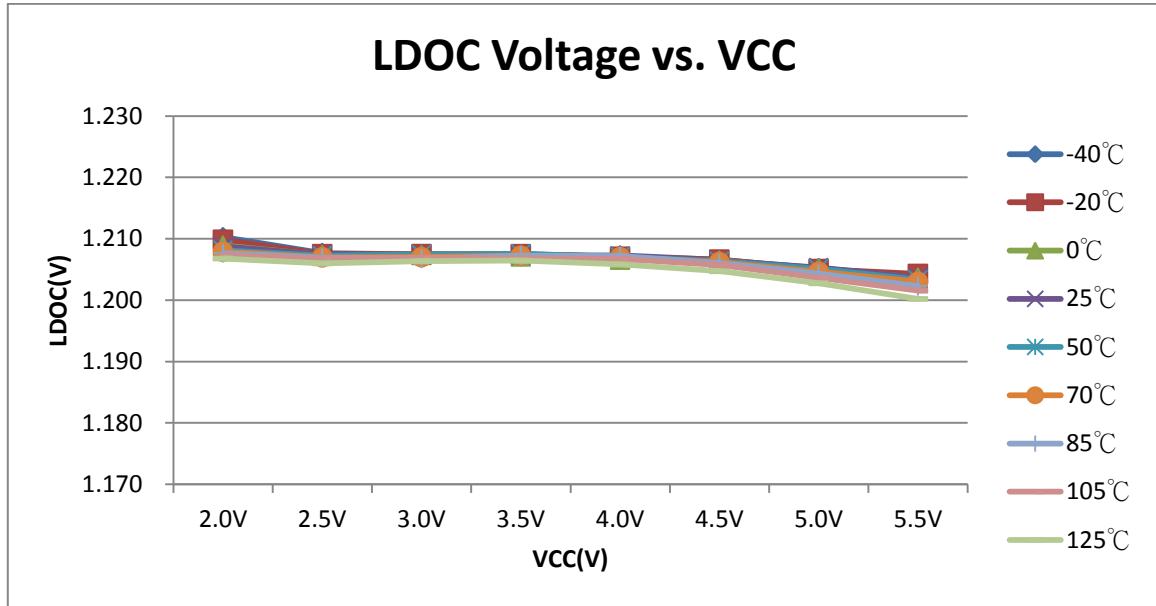


## PACKAGING INFORMATION

Please note that the package information provided is for reference only. Since this information is frequently updated, users can contact Sales to consult the latest package information and stocks.

The ordering information:


Ordering number	Package
TM56M1522/22B/22C/21H-MTP	Wafer / Dice blank chip
TM56M1522/22B/22C/21H-COD	Wafer / Dice with code
TM56M1522/22B/22C/22L/21H-MTP-16	SOP 16-pin (150 mil)
TM56M1522-MTP-15	SOP 14-pin (150 mil)
TM56M1522/22C/21H-MTP-53	MSOP 10-pin (118 mil)
TM56M1522/22C/21H-MTP-14	SOP 8-pin (150 mil)
TM56M1522/22C/21H-MTP-96	QFN 16-pin (3*3*0.75 - 0.5mm)
TM56M1522/22C/21H-MTP-B4	DFN 10-pin (3*3*0.75 - 0.5mm)

# SOP-16 (150 mil) Package Dimension

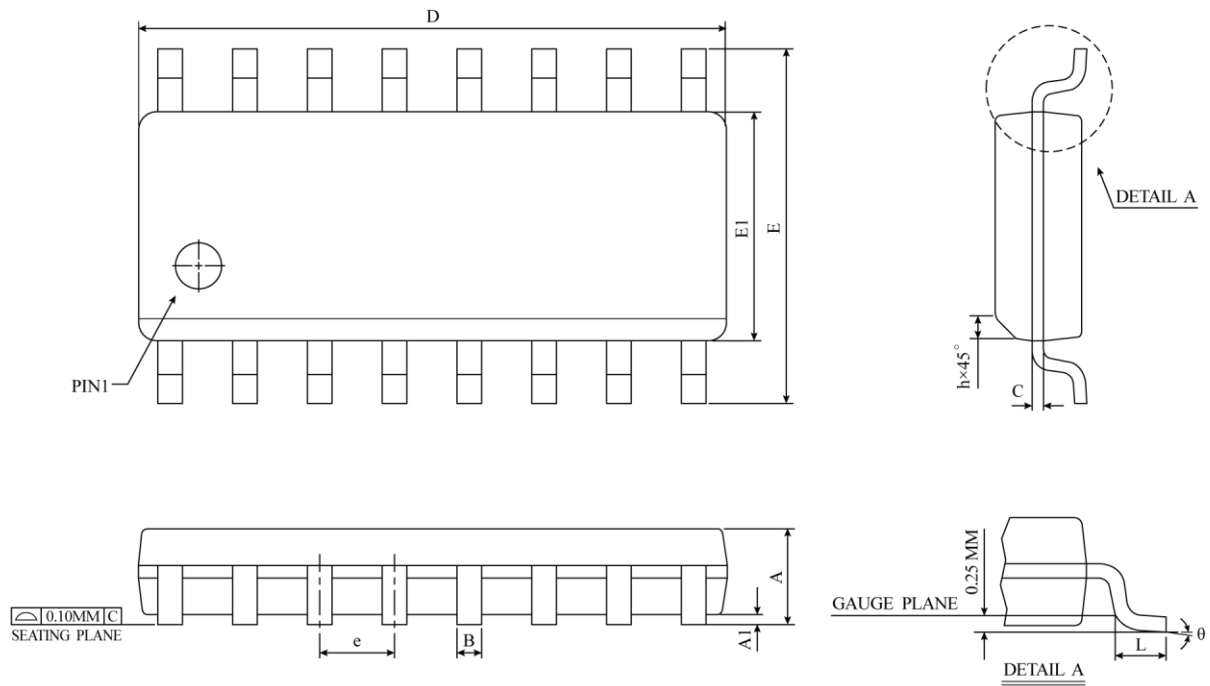


SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.55	1.75	0.0532	0.0610	0.0688
A1	0.10	0.18	0.25	0.0040	0.0069	0.0098
B	0.33	0.42	0.51	0.0130	0.0165	0.0200
C	0.19	0.22	0.25	0.0075	0.0087	0.0098
D	9.80	9.90	10.00	0.3859	0.3898	0.3937
E	5.80	6.00	6.20	0.2284	0.2362	0.2440
E1	3.80	3.90	4.00	0.1497	0.1536	0.1574
e	1.27 BSC			0.050 BSC		
h	0.25	0.38	0.50	0.0099	0.0148	0.0196
L	0.40	0.84	1.27	0.0160	0.0330	0.0500
θ	0°	4°	8°	0°	4°	8°
JEDEC	MS-012 (AC)					

△ \* NOTES : DIMENSION "D" DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS AND GATE BURRS SHALL  
NOT EXCEED 0.15 MM ( 0.006 INCH ) PER SIDE.

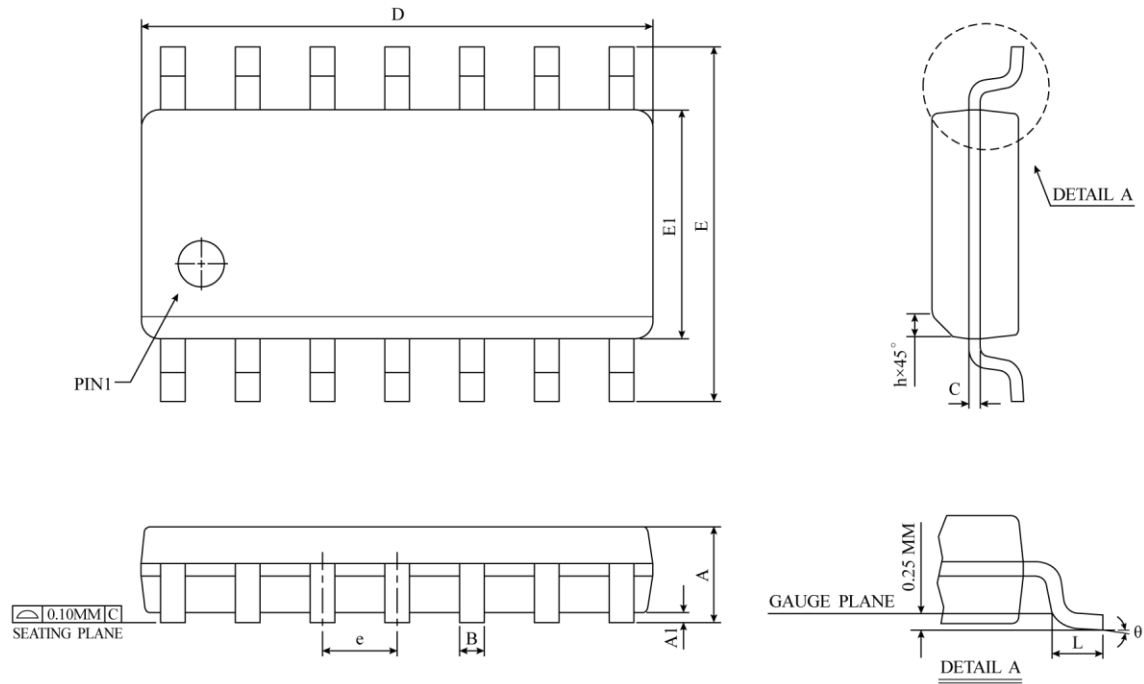**SOP-14 (150 mil) Package Dimension**


SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.55	1.75	0.0532	0.0610	0.0688
A1	0.10	0.18	0.25	0.0040	0.0069	0.0098
B	0.33	0.42	0.51	0.0130	0.0165	0.0200
C	0.19	0.22	0.25	0.0075	0.0087	0.0098
D	8.55	8.65	8.75	0.3367	0.3410	0.3444
E	5.80	6.00	6.20	0.2284	0.2362	0.2440
E1	3.80	3.90	4.00	0.1497	0.1536	0.1574
e	1.27 BSC			0.050 BSC		
h	0.25	0.38	0.50	0.0099	0.0148	0.0196
L	0.40	0.84	1.27	0.0160	0.0330	0.0500
θ	0°	4°	8°	0°	4°	8°
JEDEC	MS-012 (AB)					


△ \*NOTES : DIMENSION "D" DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS AND GATE BURRS SHALL  
NOT EXCEED 0.15 MM ( 0.006 INCH ) PER SIDE.

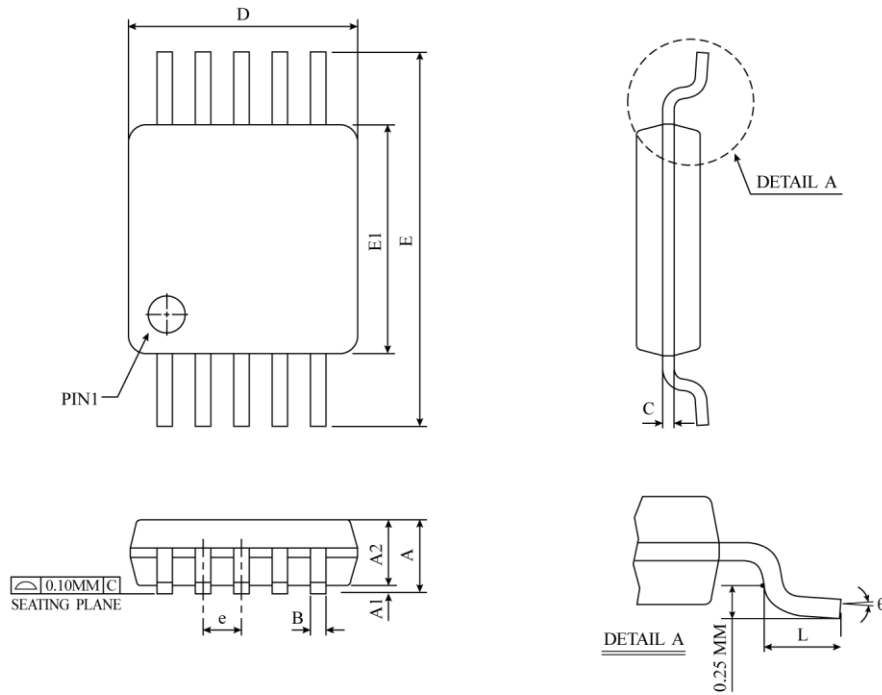**MSOP-10 (118 mil) Package Dimension**


SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.81	0.96	1.10	0.032	0.038	0.043
A1	0.05	0.10	0.15	0.002	0.004	0.006
A2	0.75	0.85	0.95	0.030	0.034	0.037
B	0.17	0.22	0.27	0.007	0.009	0.011
C	0.13	0.18	0.23	0.005	0.007	0.009
D	2.90	3.00	3.10	0.114	0.118	0.122
E	4.75	4.90	5.05	0.187	0.193	0.199
E1	2.90	3.00	3.10	0.114	0.118	0.122
e	0.50 BSC			0.020 BSC		
L	0.40	0.55	0.70	0.016	0.022	0.028
θ	0°	3°	6°	0°	3°	6°
JEDEC						

△ \* NOTES : DIMENSION "D" DOES NOT INCLUDE MOLD PROTRUSIONS OR GATE BURRS.  
 MOLD PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.12 MM ( 0.005 INCH ) PER SIDE.  
 DIMENSION "E1" DOES NOT INCLUDE MOLD PROTRUSIONS  
 MOLD PROTRUSIONS SHALL NOT EXCEED 0.25 MM ( 0.010 INCH ) PER SIDE.

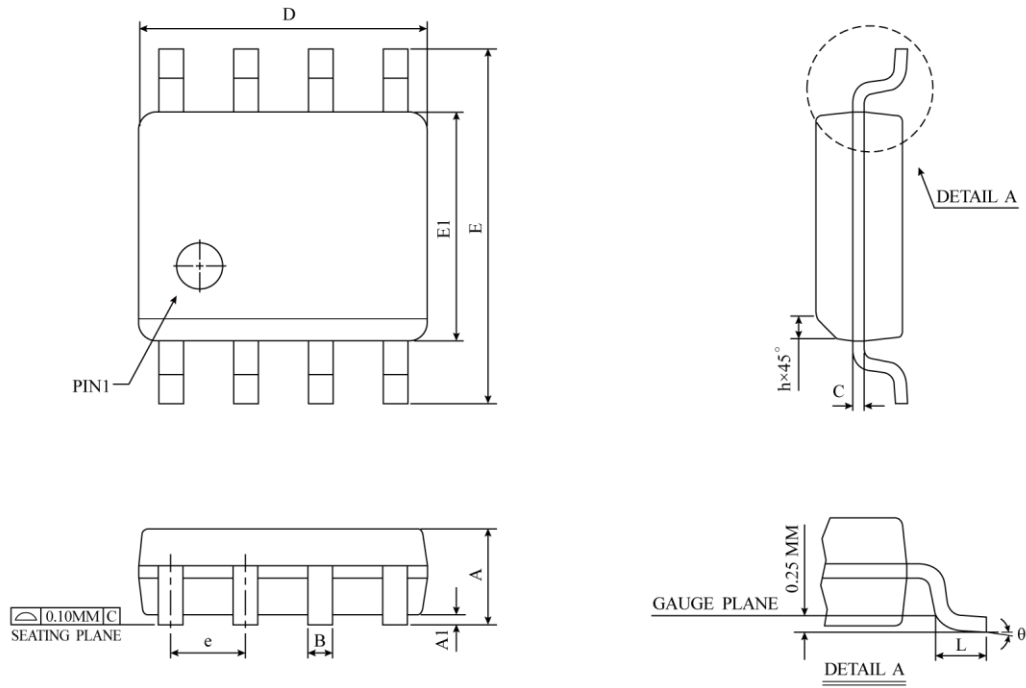


**SOP-8 (150 mil) Package Dimension**


SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.55	1.75	0.0532	0.0610	0.0688
A1	0.10	0.18	0.25	0.0040	0.0069	0.0098
B	0.33	0.42	0.51	0.0130	0.0165	0.0200
C	0.19	0.22	0.25	0.0075	0.0087	0.0098
D	4.80	4.90	5.00	0.1890	0.1939	0.1988
E	5.80	6.00	6.20	0.2284	0.2362	0.2440
E1	3.80	3.90	4.00	0.1497	0.1536	0.1574
e	1.27 BSC			0.050 BSC		
h	0.25	0.38	0.50	0.0099	0.0148	0.0196
L	0.40	0.84	1.27	0.0160	0.0330	0.0500
θ	0°	4°	8°	0°	4°	8°
JEDEC	MS-012 (AA)					


△ \* NOTES : DIMENSION "D" DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS AND GATE BURRS SHALL  
NOT EXCEED 0.15 MM ( 0.006 INCH ) PER SIDE.

### QFN-16 (3\*3\*0.75-0.5mm) Package Dimension

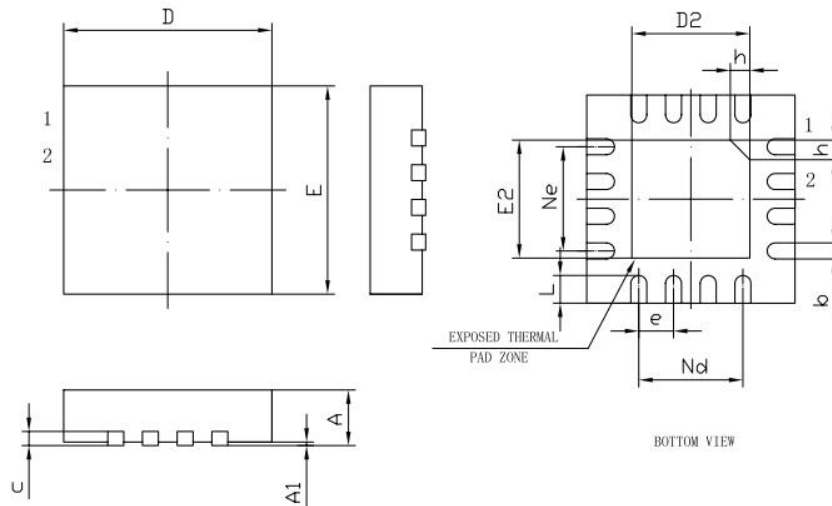

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	2.90	3.00	3.10
D2	1.55	1.65	1.75
e	0.50BSC		
Ne	1.50BSC		
Nd	1.50BSC		
E	2.90	3.00	3.10
E2	1.55	1.65	1.75
L	0.35	0.40	0.45
h	0.20	0.25	0.30
L/P载体尺寸 (mil)	75x75		

### DFN-10 (3\*3\*0.75-0.5mm) Package Dimension

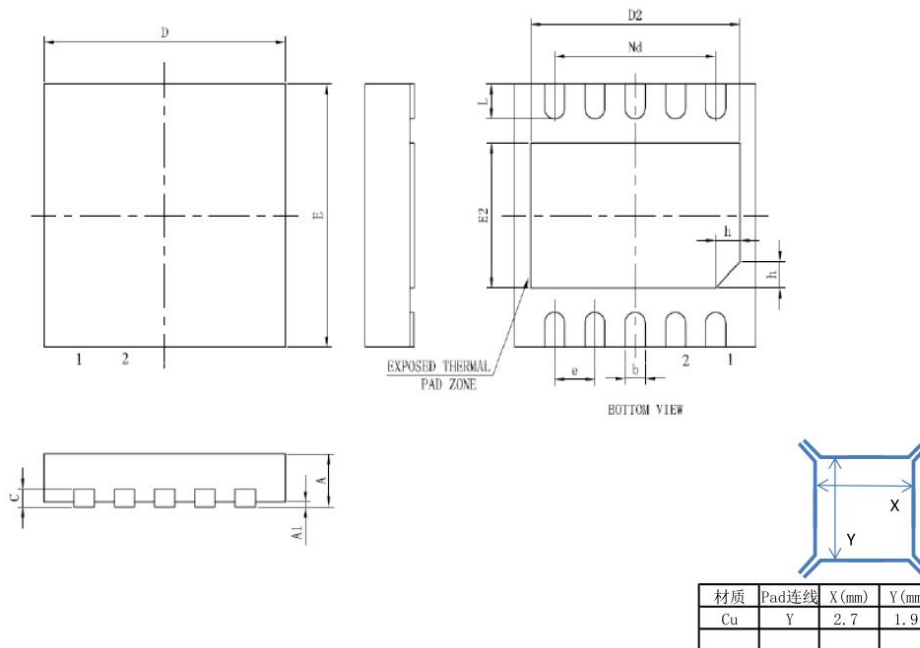

ITEM	MILLIMETER		
	Min	Nom.	Max.
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	2.90	3.00	3.10
D2	2.40	2.50	2.60
e	0.50BSC		
Nd	2.00BSC		
E	2.90	3.00	3.10
E2	1.45	1.55	1.65
L	0.30	0.40	0.50
h	0.20	0.25	0.30

材质	Pad连线	X(mm)	Y(mm)
Cu	Y	2.7	1.9

Plating	Sn-Bi
Thickness	7~20um