

TP6911

USB Audio Controller

Data Sheet

tenx reserves the right to change or discontinue the manual and online documentation to this product herein to improve reliability, function or design without further notice. Tenx does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Tenx products are not designed, intended, or authorized for use in life support appliances, devices, or systems. If Buyer purchases or uses tenx products for any such unintended or unauthorized application, Buyer shall indemnify and hold tenx and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, cost, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use even if such claim alleges that tenx was negligent regarding the design or manufacture of the part.

AMENDMENT HISTORY

Version	Date	Description
V1.0	Mar, 2007	New release
V1.1	Dec, 2011	Add Ordering Information table.

CONTENTS

AMENDMENT HISTORY.....2

GENERAL DESCRIPTION.....4

FEATURE.....4

BLOCK DIAGRAM.....4

PIN DESCRIPTION5

PIN ASSIGNMENT6

APPLICATION CIRCUIT7

ABSOLUTE MAXIMUM RATINGS.....9

OPERATING CONDITION9

ELECTRICAL PARAMETER9

DC ELECTRICAL CHARACTERISTICS:.....9

PACKAGE INFORMATION.....10

Ordering Information11


GENERAL DESCRIPTION

The TP6911 is an 8-bit micro-controller embedded device tailored to the USB audio application. It is able to play two channels PC audio and record one channel voice through Full-Speed USB bus.

FEATURE

- Compliance with the Universal Serial Bus specification v2.0 Full-Speed
- Built-in USB Transceiver and 3.3V Regulator
- Isochronous transfer with adaptive synchronization
- High performance 48KHz sampling rate for audio playback
- 24KHz sampling rate for voice recording
- Two channel audio Class-D Amplify for speaker driving
- 64-level volume control
- ADC control line support 12-keys for USB Audio and USB phone
- In USB phone mode, Support 24-keys matrix
- Embedded 10 bits ADC input
- Support USB Suspend function
- 12MHz crystal oscillation
- 28 / 48 pin package

BLOCK DIAGRAM

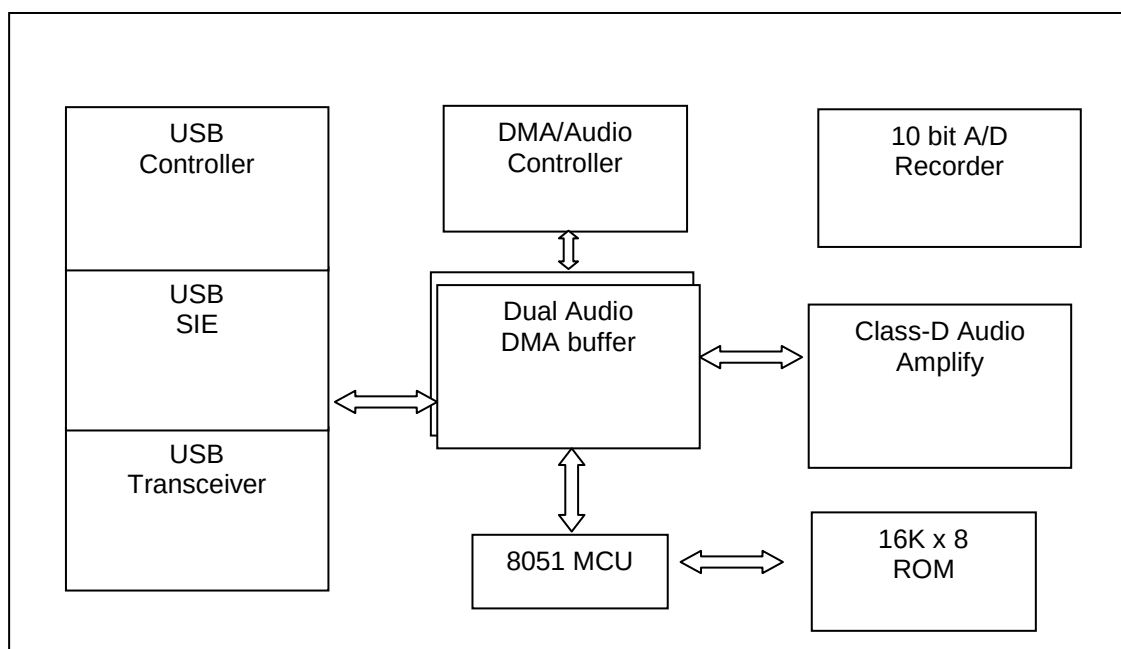


PIN DESCRIPTION


Name	I/O	Description
V33	O	3.3V Regulator output
VSS	P	Ground
VDD	P	5V Power from USB cable
VDDV	P	5V Power for PLL
VSSV	P	Ground for PLL
AVDD	P	5V Power for Recorder
AGND	P	Ground for Recorder
PWMVDD	P	5V Power for Audio Output
PWMVSS	P	Ground for Audio Output
ADCI	I	VR input for volume adjustment
X1	I	Crystal in (12MHz)
X2	O	Crystal out
RESETn	I	Chip reset (active low)
DP	I/O	USB positive data signal
DM	I/O	USB negative data signal
AUDIOLP	O	Audio output
AUDIOLN	O	Audio output
AUDIORP	O	Audio output
AUDIORN	O	Audio output
MICIN+	I	MIC IN+
MICIN-	I	MIC IN-
ANAO	O	Recorder AC Couple Out
ANAI	I	Recorder AC Couple In
KSI[7:0]	I	Keyscan Input
KSO[2:0]	O	Keyscan Output
P1[7:0]	I/O	General purpose I/O
P3[5,4]	I/O	General purpose I/O

PIN ASSIGNMENT

HSOP28

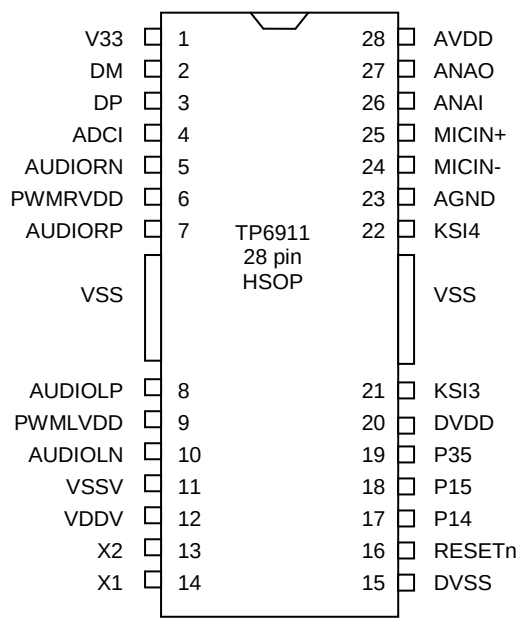

LQFP48

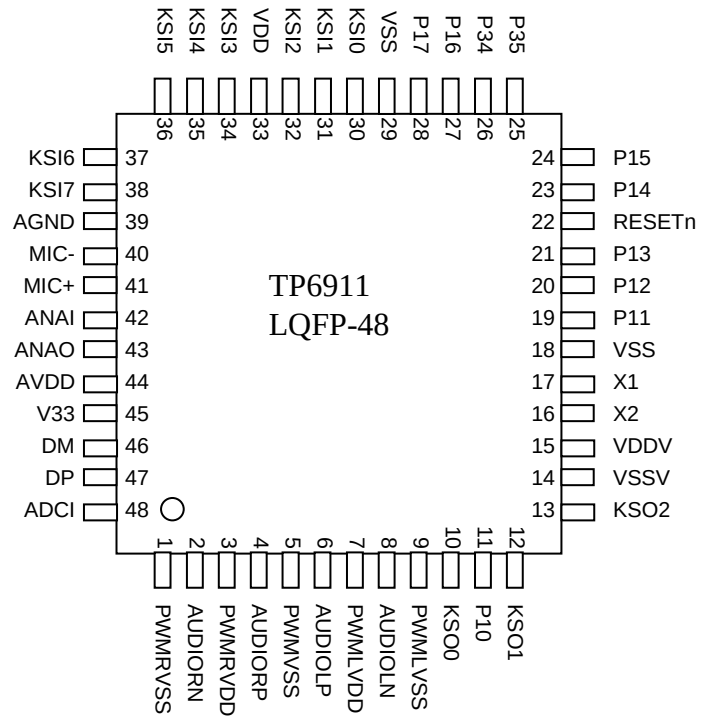

APPLICATION CIRCUIT

TP6911




TP6911




KSI

These pins are used as keyboard scan inputs. Each one of them has a pull up resistor. In addition, each KSI pin can cause Keyboard interrupt (KBDint) if the corresponding interrupt mask bit (KBDmask) is 0. The KBDint is asserted at the falling edge of KSI pin.

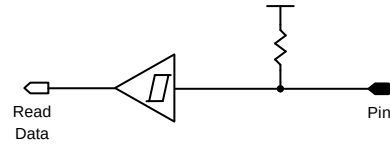**KSI****KSO[2:0]**

These pins are used as keyboard scan outputs. They have at least 4mA drive and sink strength.

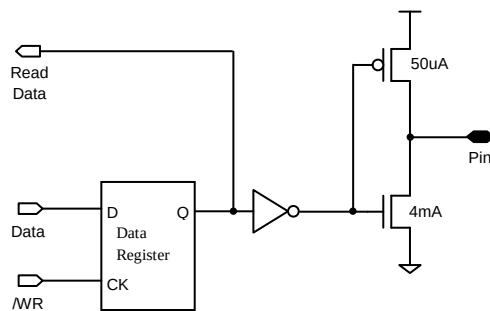**KSO[2:0]**

ABSOLUTE MAXIMUM RATINGS

GND= 0V

Name	Symbol	Range	Unit
Maximum Supply Voltage	VDD	-0.3 to 5.5	V
Maximum Input Voltage	Vin	-0.3 to VDD+0.3	V
Maximum output Voltage	Vout	-0.3 to VDD+0.3	V
Maximum Operating Temperature	Topg	-20 to +70	°C
Maximum Storage Temperature	Tstg	-25 to +125	°C

OPERATING CONDITION

at Ta= -20°C to 70°C ,GND= 0V

Name	Symb.	Min.	Typ.	Max.	Unit
Supply Voltage	VDD	4.5		5.5	V
Input "H" Voltage	Vih	4.0		5.5	V
Input "L" Voltage	Vil	0		1.0	V
Crystal frequency	Fosc		12		MHz

ELECTRICAL PARAMETER

at Ta= -20°C to 70°C ,GND= 0V


Name	Symb.	Typ	Unit
Maximum Audio Output Current per Channel @ 8ohm Load	Iout	456	mA

DC ELECTRICAL CHARACTERISTICS:


at Ta=-25 °C, VDD5=5.0V, VSS= 0V, Fosc=12MHz

Name	Symb	Min.	Typ.	Max.	Unit	Condition	Note
Operating current	Icc		50		mA	Fosc=12MHz	
P14/P15 Output High Voltage	Voh		4.0		V	Ioh=30uA	
P14/P15 Output Low Voltage	Vol		0.4		V	Iol=14mA	
LED(P3.5) Output Low Voltage	Vol		0.4		V	Iol=34mA	
V33 output voltage	V33	3.2		3.4	V	VDD=5V	

- **HSOP - 28Pin**

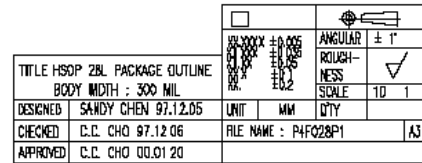

● LQFP - 48Pin

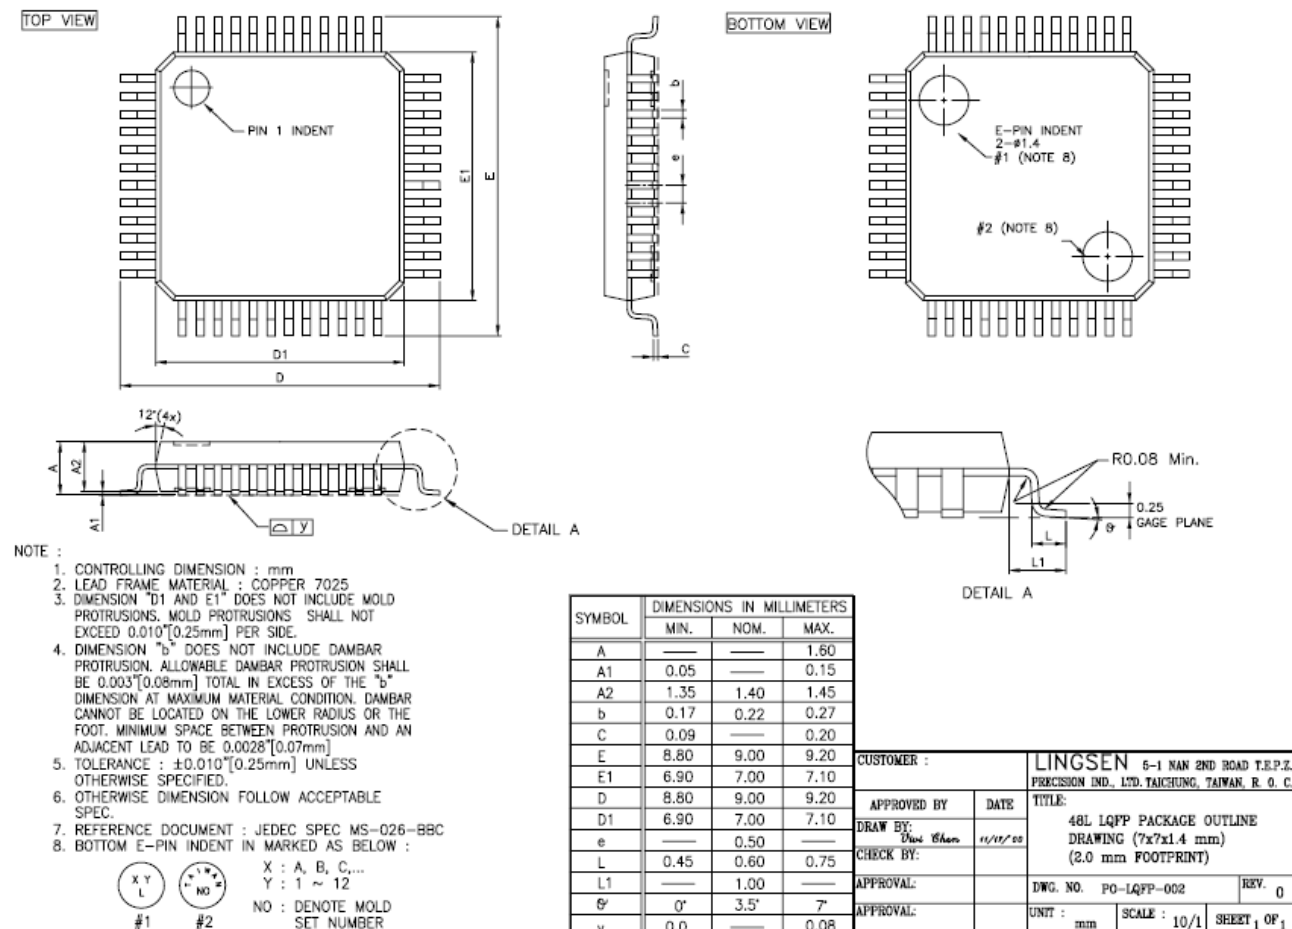

Ordering Information

The ordering information:

Ordering number	Package
TP6911-101-54-X	HSOP 28-pin (300 mil)
TP6911-101-72-X	LQFP 48-pin (7*7*1.4 mm)

Note: "-X" represents the package material:

- Package material: Pb-free Code: W
- Package material: Green Package Code: G