



十速科技股份有限公司
tenx technology inc.

**Advance
Information**

TMU3113

USB Full Speed Controller

Data Sheet

**Tenx reserves the right to change or
discontinue this product without notice.**

tenx technology inc.

tenx technology, inc.

Preliminary

Rev 1.0, 2009/06/02

CONTENTS

1. GENERAL DESCRIPTION.....	2
2. FEATURES	2
3. Functional LOCK DIAGRAM	4
4. PIN DESCRIPTION.....	5
5. CPU Operation Mode V.S. Peripheral Clock	6
6. Package	7
7. Application Circuit	8
8. ELECTRICAL CHARACTERISTICS	9
(1). ABSOLOUTE MAXIMUM RATINGS.....	9
(2). RECOMMEND OPERATING CONDITION.....	9
(3). DC CHARACTERISTICS.....	9
(4). USB AC CHARACTERISTICS.....	10

1. GENERAL DESCRIPTION

The TMU3113 is an 8051-based embedded device tailored to the USB full speed general purpose application. TMU3113 is designed for connecting PC or operating in stand-alone (non-PC) mode. It also supports the powerful functions and interfaces, such as master/slave SPI and external parallel bus (I80 8-bit parallel interface).

2. FEATURES

(1). Dual Power System

- USB 5V and/or battery-in dual power systems

(2). Operation Frequency

- FAST mode
 - ◆ 6MHz crystal oscillator for PLL clock source, PLL generate 48MHz for USB data transaction and 24MHz/6MHz for CPU clock
- SLOW mode
 - ◆ External resistor, RC oscillator at 2.0V~3.6V for battery system (optional)
 - ◆ 32KHz crystal oscillator for CPU clock and accuracy timing in low power mode (optional)
- STOP mode

(3). On-Chip Memory

- 24k x 8 internal program OTP-ROM
- Internal RAM 256 bytes and external XRAM up to 320 bytes

(4). USB interface

- Compliance with the Universal Serial Bus specification v2.0 Full Speed
- Built-in USB Transceiver, 3.3V regulator
- Software Control USB pull-up resistor
- Support USB Suspend /Resume and Remote Wakeup function
- Endpoint 0: Control SETUP transfer (8 bytes)
- Endpoint 0: Control IN/OUT transfer (64 bytes)
- Endpoint 1: BULK-IN transfer with Pin-Pong feature (2*64 bytes)
- Endpoint 2: BULK-OUT transfer with Pin-Pong feature (2*64 bytes)
- Endpoint 3: INTERRUPT IN transfer (8 bytes)

(9). I80 Interface (a.k.a. NAND-Flash interface)

- Data transfer for all of External XRAMs
- Write DMA (up to 64 bytes per time)
- Read DMA (up to 64 bytes per time)
- Compatible with 8-bit parallel interface

(10). SPI Interface

- Mode0, 1, 2, 3
- Master or Slave mode
- Clock Rate up to 12Mbps
- Read DMA (up to 64 bytes per time)
- Write DMA (up to 64 bytes per time)

(11). PWM

- Support 2 channels of Pulse Width Modulation (PWM) function with 8-bit resolution

(12). Reset Controller

- Power On Reset
- Low Voltage Reset
- Watch-Dog Timer
- USB Plug-in Reset
- Plug-out Reset


(13). Keep SRAM data when USB un-plug (need battery)**(14). I/O Ports**

- Max. 30 GPIOs to flexible application
- 4 external Interrupts with wakeup function

(15). LQFP80 / Die Form / Customer Request**(16). Application**

- USB full speed general purpose devices
- Portable picture viewer equipment (Digital Portable Framer)

3. Functional LOCK DIAGRAM

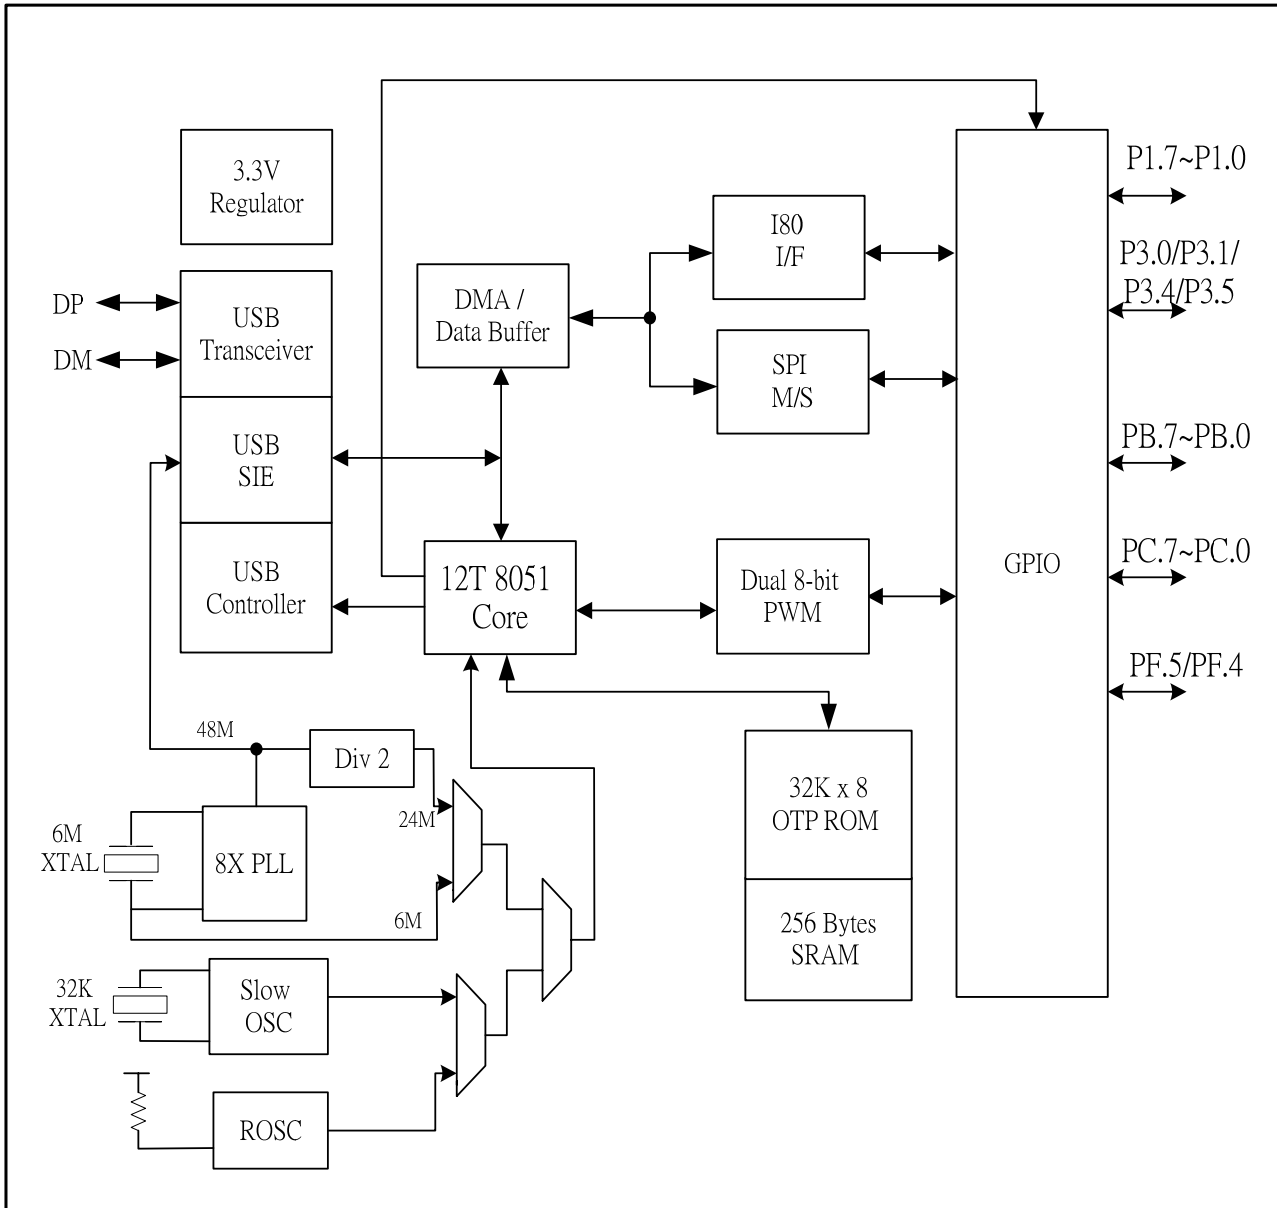

4. PIN DESCRIPTION

Name	I/O	Description		
VDD	P	5V Power from USB cable		
VSS	P	Ground		
VUSB	I	USB 5V detection pin, should connect to USB power		
VBAT	P	Battery power in		
V33	O	3.3V regulator output		
DP	I/O	USB positive data signal		
DM	I/O	USB negative data signal		
VPP/RSTN	I	OTP programming power/Chip reset pin (internal pull-up)		
TSTN	I	Test Mode control (internal pull-up)		
FX1	I	Crystal in (6MHz)		
FX2	O	Crystal out		
VDDX	P	PLL power		
FLTC	I	PLL filter		
VSSX	P	PLL ground		
LX1	I	Crystal in (32KHz)		
LX2	O	Crystal out		
VR	I	RCLK clock, external resistor		
P1[7:0]	I/O	8051's Port1		
P3[1:0]	I/O	8051's Port3[1:0]		
P3.5/T0	I/O	8051's Port3.5 / Timer 0		
P3.4/T1	I/O	8051's Port3.4 / Timer 1		
PB[7:0]	I/O	GPIO (b)	I80_DIO[7:0] (b)	
PC[0]	I/O	GPIO with wake-up interrupt (b)	I80_WRN (o)	
PC[1]	I/O	GPIO with wake-up interrupt (b)	I80_RDN (o)	
PC[2]	I/O	GPIO with wake-up interrupt (b)		
PC[3]	I/O	GPIO with wake-up interrupt (b)		
PC[4]	I/O	GPIO (b)		PWMB out (o)
PC[5]	I/O	GPIO (b)		PWMA out (o)
PC[6]	I/O	GPIO (b)		SPICLK M(o), S(i)
PC[7]	I/O	GPIO (b)		SPI DOUT (o)
PF[4]	I/O	GPIO		SPI DIN (i)
PF[5]	I/O	GPIO		SPI CSN (i)

All I/O ports are pseudo-open drain type, unless otherwise specified function.


5. CPU Operation Mode V.S. Peripheral Clock

	DUAL MODE ⁽¹⁾		SIGNLE MODE ⁽¹⁾	NOTE
	SLOW ⁽²⁾	FAST ⁽²⁾		
CPUCLK(CPU51)	RCLK/32KHz	6M/24MHz	6M/24MHz	
USB function	N/A	48MHz	48MHz	XTAL_EN = 1
NAND(180) DMA	N/A	6MHz	6MHz	
SPI	CPUCLK	CPUCLK	CPUCLK	
WDT	CPUCLK	CPUCLK	CPUCLK	
PWMA/B	CPUCLK	CPUCLK	CPUCLK	
0.5sec timer wakeup Interrupt	0.5sec	0.5sec	0.5sec	If 32KHz Xtal ⁽³⁾ is available


Notes:

- (1) & (3) Function enable/disable control by FUSE option.
(2) CPU clock mode switching control by firmware.

6. Package

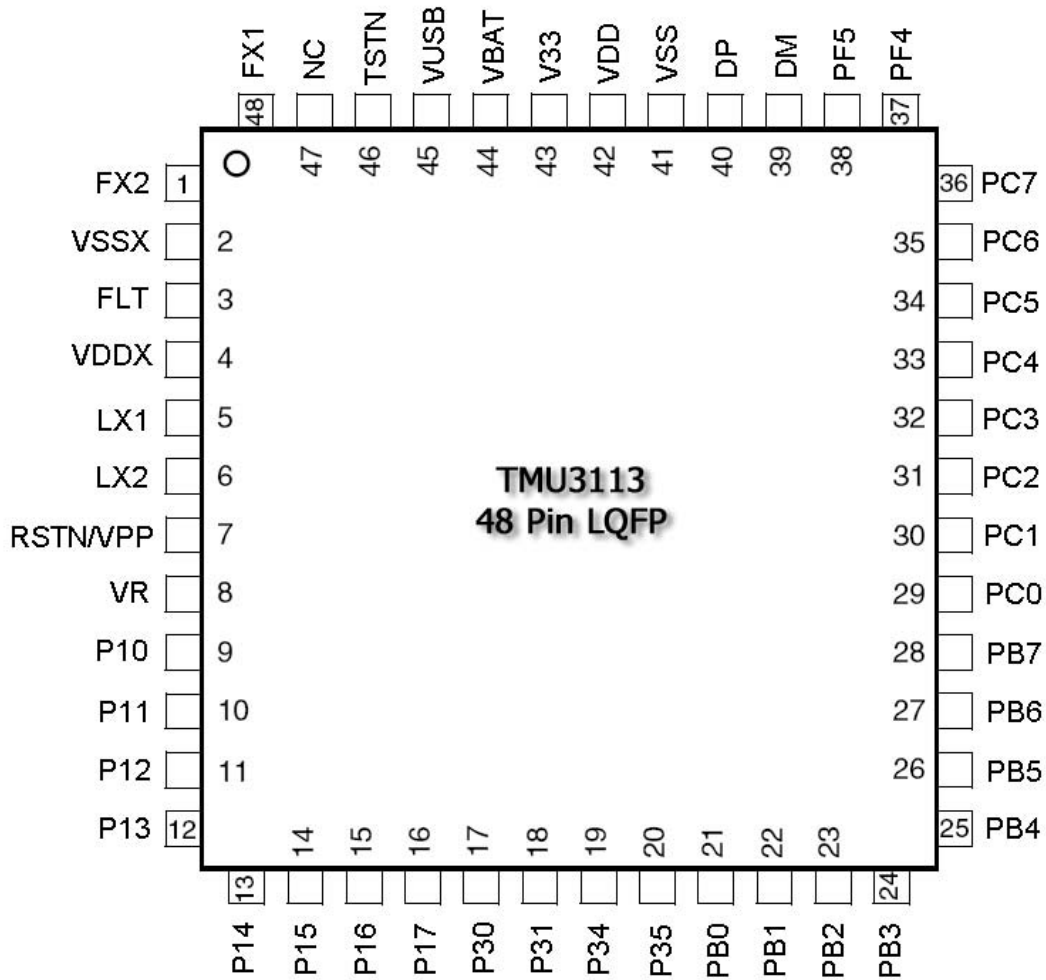

7. Application Circuit

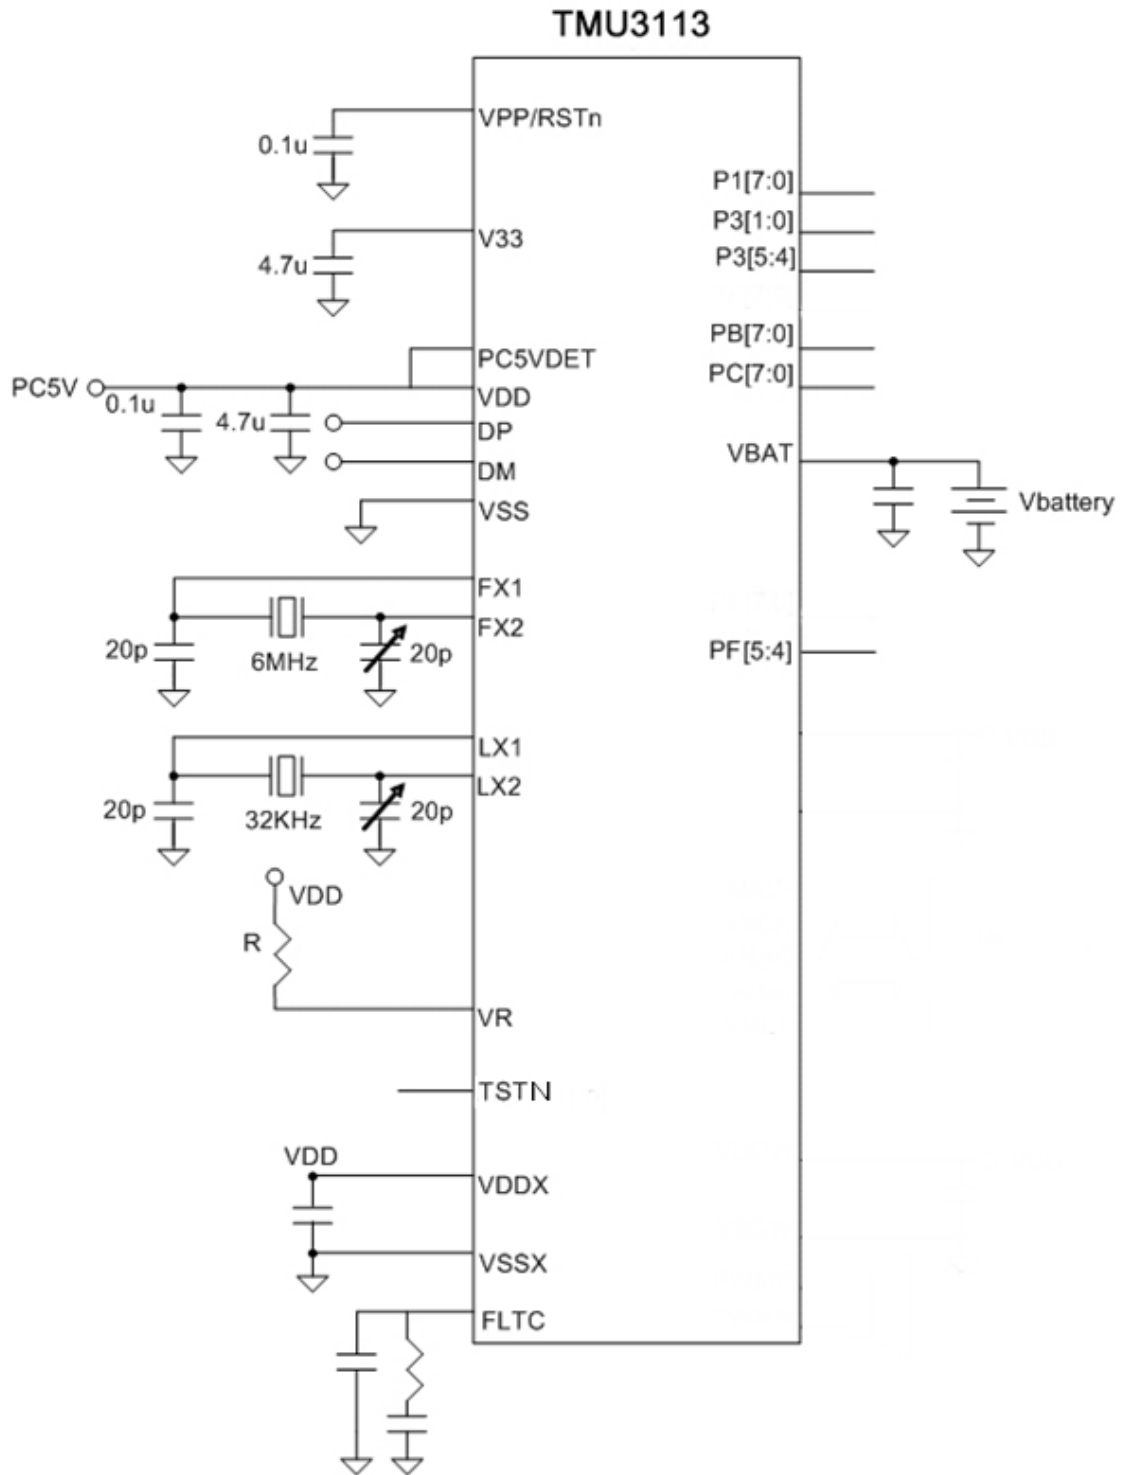

8. ELECTRICAL CHARACTERISTICS**(1). ABSOLUTE MAXIMUM RATINGS (GND = 0V)**

Name	Symbol	Range	Unit
Maximum Supply Voltage	VDD	-0.3 to 5.5	V
Maximum Input Voltage	Vin	-0.3 to VDD + 0.3	V
Maximum output Voltage	Vout	-0.3 to VDD + 0.3	V
Maximum Operating Temperature	Topg	-10 to + 70	°C
Maximum Storage Temperature	Tstg	-25 to + 125	°C

(2). RECOMMEND OPERATING CONDITION (at Ta = -10°C to 70°C, GND = 0V)

Name	Symb.	Min.	Max.	Unit
Supply Voltage	VDD	2.2	5.5	V
Battery Voltage, if apply	Vbat	2.2	4.2	V
Input "H" Voltage	Vih	0.9 x VDD	VDD	V
Input "L" Voltage	Vil	0	0.1 x VDD	V

(3). DC CHARACTERISTICS

(at Ta = 25°C, VDD = 5.0V, VSS = 0V, unless otherwise specify)

Name	Symb.	Min.	Typ.	Max.	Unit	Condition	Note
FAST clock	fclk1		24		MHz	XT6MHz On, PLL enable	
	fclk2		6		MHz	XT6MHz On	
SLOW clock	sclk1	0.1		10	MHz	VBAT = 3.0V, VDD = N.C.	
	sclk2		32		KHz	XT32KHz On	
Operating current	lcc1		10		mA	fclk1 = 24MHz, XT6MHz On	No load
	lcc2		0.8		mA	XT6MHz Off, RCLK = 3MHz VBAT = 3.0V, VDD = N.C.	No load
Suspend current	lsus		360	500	uA	USB mode	No load
Power down current	lpd1		3	5	uA	VDD = 3.0v, XT32KHz Off	No load
Output high current	loh1	2.5	3.8	-	mA	Voh = 3.0v, Vbat = 3.3v, VDD = N.C.	One clk time
	loh2	4	6	-	uA		
	loh3	2.5	3.8	-	mA		PWMA/B
	loh4	60	70	-	mA		VDD = 3.3V, Voh = VDD/2
Output low current	lol1	10	15	-	mA	Vol = VSS + 0.4v,	GPIO
	lol2	20	25	-	mA	Vol = VSS + 0.4v	PWMA/B
Input high voltage	Vih1	1.6		VDD	V	VDD = 3.2V, Vio = V33 = 3.2V PC5V = 0, Schmitt trigger	GPIO
	Vih2	1.7		VDD	V	VDD = 5.0V, Vio = V33 = 3.3V, PC5V > Vih3, Schmitt trigger	GPIO
PC5V Reset Point	Vrise	3.1			V	Schmitt trigger	PC5V
	Vfall			1.2	V		
Pull up resistance	Rup1	5	10	15	KΩ	VDD = 3.3 or 5V	VPP/RSTn
	Rup2	40	50	60	KΩ	VDD = 5V	TEST pin
Pull down resistance	Rdn1	50	100	150	KΩ	PC5V	
V33 pin voltage	V33	3.0	3.3	3.6	V	130mA, PC5V > Vih3	

(4). USB AC CHARACTERISTICS(at $T_a = 25^\circ\text{C}$, $V_{DD} = AV_{DD} = 5.0\text{V}$, $V_{SS} = AGND = 0\text{V}$)

Name	Symb.	Min.	Typ.	Max.	Unit	Note
DP/DM rising time	T_{rise}	4		20	ns	
DP/DM falling time	T_{fall}	4		20	ns	
DP,DM cross point	V_x	1.3		2.0	V	
V33 output voltage	V_{reg}	3.2	3.3	3.4	V	

Note: All USB transceiver characteristics can meet USB1.1 spec.